


SFE

Automotive fast-acting glass fuse

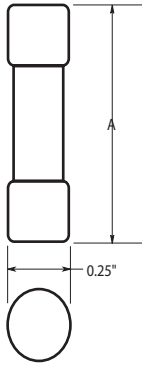

Dimensional Data

Part number	Current rating (A)	"A" Length Inches	mm
SFE-4	4	5/8	15.9
SFE-6	6	3/4	19.0
SFE-7-1/2	7 1/2	7/8	22.2
SFE-9	9	7/8	22.2
SFE-14	14	1-1/16	27.0
SFE-20	20	1-1/4	31.7
SFE-30	30	1-7/16	36.5


Product features

- For automotive circuits.
- Visual indicating glass tubing.
- Made to SAE specifications.
- 32 V, 4 A – 30 A
- Physical size varies with electrical rating of fuse to prevent over-fusing.
- For mounting in in-line holders, and 1/4" clips.

Agency information

- U.L. LISTED: GUIDE #FHXT, FILE #AU169)

Time-Current Characteristics—Total Clear

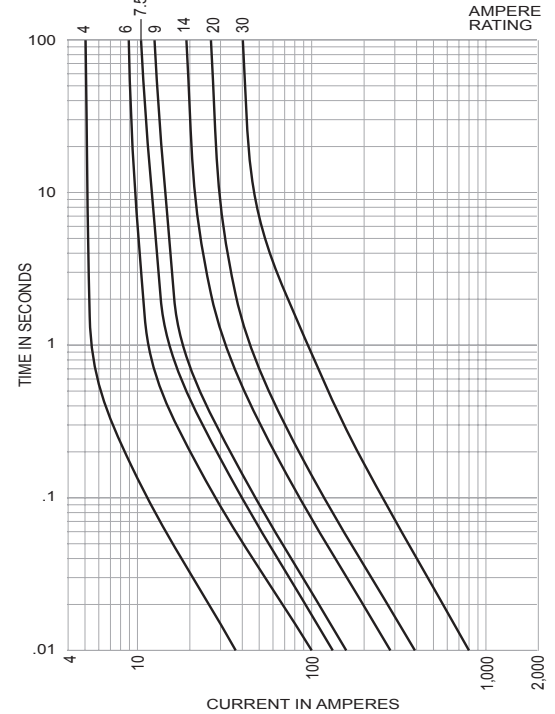

In-line Fuseholders

Wire Length (#14 Wire)	Catalog Number		
	Fuse	Fuse & Holder (w/leads)	Holder Only (No Leads)
19"	SFE-20	HRJ	*HHJ-A, HHJ-B
	SFE-14	HRI	*HHI-A, HHI-B
	SFE-9	HRH	HHH-A
	SFE-7-1/2	HRE	HHH-A
	SFE-6	HRG	HIG-A
	SFE-4	HRF	HIR-A
	SFE-20	HMJ	*HDJ-A, HDJ-B
8"	SFE-14	HMI	*HDI-A, HDI-B
	SFE-9	HMH	—
	SFE-7-1/2	HME	—
	SFE-6	HMG	—
	SFE-4	HMF	—

*-A: Crimp connections for #18 - #22 wire.
-B: Crimp connections for #12 - #16 wire.

Carton Quantity and Weight

Part number	Carton Qty	Weight*	
		Lbs.	Kg.
SFE-4	100	0.73	0.331
SFE-6	100	0.75	0.340
SFE-7-1/2	100	0.80	0.363
SFE-9	100	0.80	0.363
SFE-14	100	0.82	0.372
SFE-20	100	0.87	0.395
SFE-30	100	1.60	0.762

* Weight per carton.