

Installation Instructions

8891080 Series LED LIGHTBAR



Power On/Off

Flash Pattern
Selector

Fig. 1

Flash Pattern	Description
1	Single-Hold
2	Double-Hold
3	Quad-Hold
4	Strobe-Hold
5	Rotate CW
6	Random 1
7	Burst-Hold
8	Burst-Hold/Single-Hold
9	Burst/Single-Hold
10	Rotate Slow CW
11	Random 2
12	Alternating Single
13	Alternating Double
14	Alternating Quad
15	Alternating Strobe
16	Alternating Single, Fast
17	Alternating Burst
18	Alternating Double/Alternating Single
19	Alternating Quad/Alternating Single
20	Quad-Hold/Alternating Quad

Specifications

40 High-power LEDs
3.34 Amps @ 12V
40W
9-7/8" 6-3/4" x 2"

Wiring Designation

Red: +VDC
Blue: Ground
Green: Signal

WARNING

Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage





WARNING

It is not recommended to use magnetically mounted warning devices on vehicles in motion. Usage is at sole risk and responsibility of the user.

Note: Press pattern button 0.5 seconds for next pattern

1. Unscrew magnetic feet by turning counter clockwise.
2. Insert rubber a plug into each magnetic foot mounting hole, with adhesive side on lightbar.
4. Insert 10mm bolt, head first, into the bottom of the lightbar.
5. Mark and drill holes into desired mounting surface.
6. The lightbar is now ready to be permanently mounted.
7. Use the included washer, split washer, and nut to finish attaching the lightbar to the mounting surface.

Bolt-On (Permanent) Mount

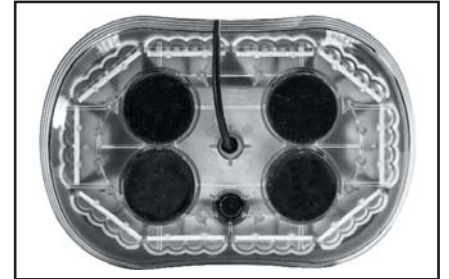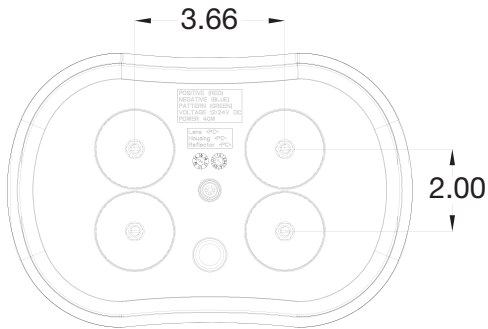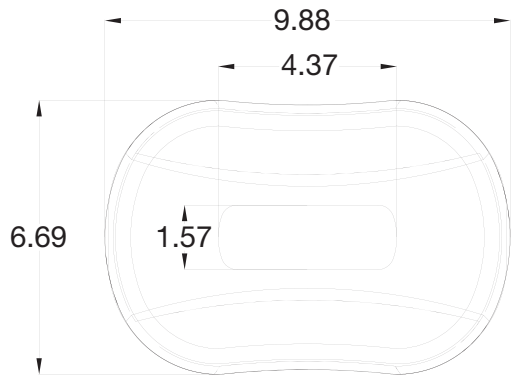

Magnetic Mount

