


## Surface Mount

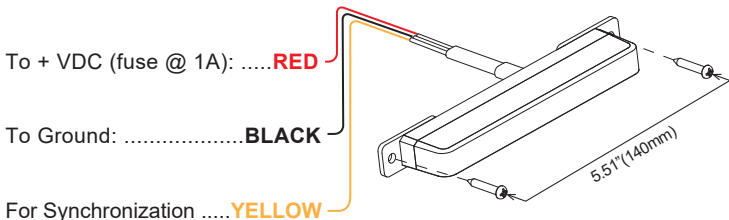

Connect **YELLOW** wires of all heads together for synchronization  
(All heads should be set to the same pattern)

### For Simultaneous or Alternating Flash:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthead will display short (single or double) flashes:  
Single flash = Group1      Double flash = Group2
2. Remove **YELLOW** wire from +VDC and momentarily apply to +VDC to change Groups:  
Heads in the same Group flash together.  
Group1 Heads alternate with Group2 Heads.


### For Flash Patterns:

Momentarily apply +VDC to **YELLOW** wire:  
once for next pattern  
quick three times to reset  
to FP#1


**NOTE:** This unit may not be factory-set at FP#1.

Flash Patterns			
1	Double [2Hz]	9	Double [SAE]
2	Single [2Hz]	10	Triple [SAE]
3	Triple [2Hz]	11	Quad [SAE]
4	Quad [2Hz]	12	Quint [SAE]
5	Random	13	Ultra [SAE]
6	Steady	14	Single-Quad
7	Single [SAE, CA13]	15	Single H/L
8	Mega	16	Single-Triple-Quint


## Universal Bracket (Angle-Adjustable)

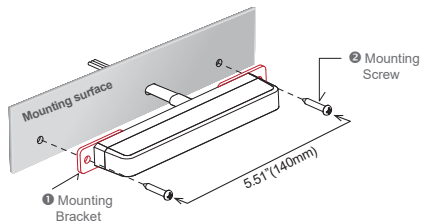

OR

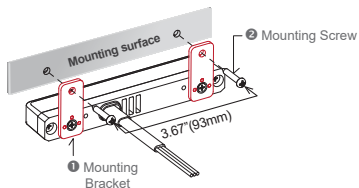

## L-Bracket (Front)

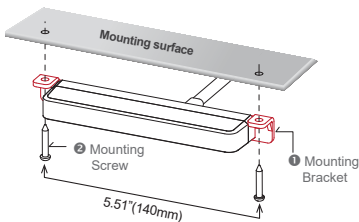

## L-Bracket (Rear)

