

CALIBER[®] EdgeGlide 2.0 – 4pc. Set (96” kit)

Installation Instructions for Part No. 13392

TOOLS REQUIRED:

- Power Drill
- Tape Measure
- Pencil or Marker

HARDWARE INCLUDED:

- 4 – Hinge/Glide Pcs.
- 4 – Hinge Rods
- 4 – 8ct. Screw Packs
- 12 – Push Fasteners
- 4 – Rubber Links
- 8 – Link Screws

READ ALL INSTRUCTIONS PRIOR TO INSTALLATION

STEP 1: Remove contents from packaging, and separate hardware components.

STEP 2: Measure door size, or trailer opening to determine overall assembly size needed.

NOTE: * If needed – use provided cut lines (every 3”) to resize EdgeGlide pieces to ensure proper fit for door size or trailer opening. Glides may be cut with any saw suitable for wood, metal, or plastic. *


STEP 3: Pair each hinge and glide portions together by using the provided hinge rods and push each rod through the entire hinge and glide assembly.

NOTE: Hinge rods may need to be trimmed. Ensure each rod is 1” shorter than overall assembly size.

STEP 3: Use provided push-pin fasteners to contain hinge rods in their position.

STEP 4: Position EdgeGlide pieces on the trailer and fasten them in place with provided fasteners

STEP 5: Using the provided rubber links and fasteners, on the back side of the component, secure each portion of EdgeGlide to the next.

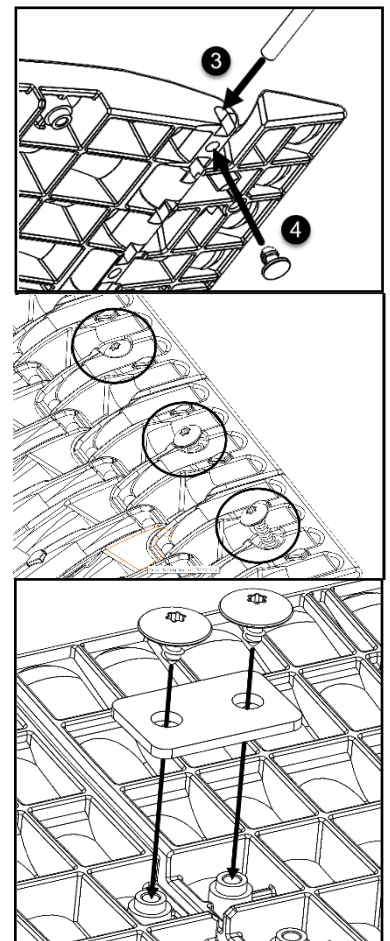

DISCLAIMER: Caliber, Inc. shall not be liable for any special, incidental or consequential damages, including, but not limited to, lost revenues, lost profits, personal injury, damage to property, and third-party claims, arising out of any warranty, contract, statutory or tort. Notwithstanding the term of any limited warranty or any warranty implied by law, or in the event that any limited warranty fails of its essential purpose, in no event will Caliber’s entire liability exceed the purchase price of this product.

CALIBER[®]