

JL 180 Light Mount Installation Instructions

Part No: 210291



Quality and Style that Endures

Follow the diagram and the written directions carefully for a proper, safe installation.

Vehicle Application:

JEEP JL

'18-'19 JL - All models.

MATERIAL NEEDED:

3/8 wrench, 1/2 wrench, T40 torx wrench or T40 torx socket drive, blue thread locker.

MATERIAL FURNISHED:

2 – Light mounts, (1 - right, 1 - left), 2 – Swivel brackets 1 – Hardware pack, 1 – Instruction. **LIGHTS NOT INCLUDED**

1. Insert grommet on passenger side light mount. Make sure the grommet is properly seated.




2. Screw the plunger bolt into the swivel plate as shown. (Blue thread locker is recommended)



3. Assemble light mount as shown in this order.

1. Place hex or carriage bolt through light holder bracket (Light holder bracket not included)
2. Steel 5/16 washer
3. Delrin washer (white)
4. Side light mount
5. Delrin washer (white)
6. Steel 5/16 washer
7. Swivel plate
8. Nylon lock nut

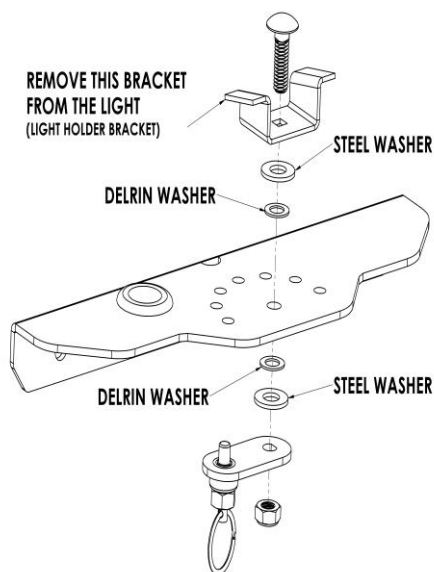

IMPORTANT: Do not over tighten lock nut, the assembly will need to swivel. Plunger bolt needs to be on rear hole towards rear of vehicle as shown

Note A:

Both hex and carriage slotted bolts will mate with D shaped hole on swivel bracket to lock your light bracket with the swivel plate.



JL 180 Light Mount Installation Instructions

Part No: 210291

NOTE B

Top view shown here. With the light mount bracket installed with the swivel and plunger assembly, you may now reinstall the light.



4. Remove the factory Torx bolts, one side of the vehicle at a time.



5. Install the light mount assembly using the nylon spacers in between the vehicle and the light mount (**Note: for the passenger side, make sure the antenna is through the hole with the grommet**). Use supplied longer Torx bolts along with the black plastic washers provided. This will prevent scratches on both the vehicle and light mount. Tighten the bolts using factory torque specs.



6. Your light mount is now ready for use.

Wiring and electrical installation should always be done by a professional.



WARNINGS!

- ✓ Do not over tighten the nuts and bolts or damage to the castings and or stripping of the threads could result.
- ✓ FOR SAFE AND PROPER USAGE OF THIS PRODUCT, THE MOUNTING INSTRUCTIONS MUST BE FOLLOWED CAREFULLY AND COMPLETELY.
- ✓ The manufacturer and distributor of this product are in no way responsible for the consumer's failure to adhere to the warnings and directions of these instructions in the event of damage to the consumer's vehicle, other properties and or personal injury.