


Step 1: Center <u>billet grille</u> in opening. Use 1/4-20 x 2 1/2" Bolts supplied and attach per illustration below.

Step 2: Check to make sure the grille is properly in place and tighten the bolts just enough to hold the grille in place. **DO NOT OVER TIGHTEN** as this may cause the grille shell to crack.

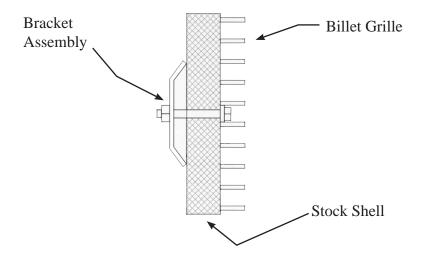

Note: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control. Carriage Works recommends applying a high quality automotive wax to maintain the original appearance.