

2014 Chevy Silverado 1500 No Cut Replacement

PART# 47231 (Brushed) 47232 - (Polished) 47233 - (Black)



Remove stock shell and place on protective work surface.



Removal of the black stock inserts.

Hardware

10-24 U-Clips

10-24 x 5/8" Phillips head bolts

#1 Bracket


#2 Bracket


#3 Bracket

#4 Bracket



Next remove the black stock inserts from shell by pushing down on the clip to release. Remove both top and bottom portion.

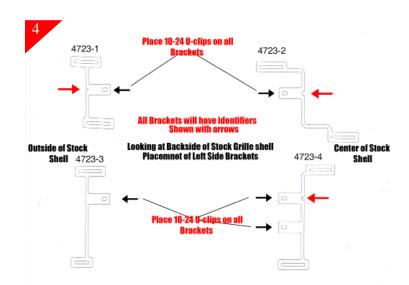




Refering to step 4 place brackets as shown. Repeat for remaing side of grille.



Turn grill shell face up. Place <u>Billet grilles</u> into opening and center. Secure in place using the supplied 10-24 x 1" Phillips head bolts.

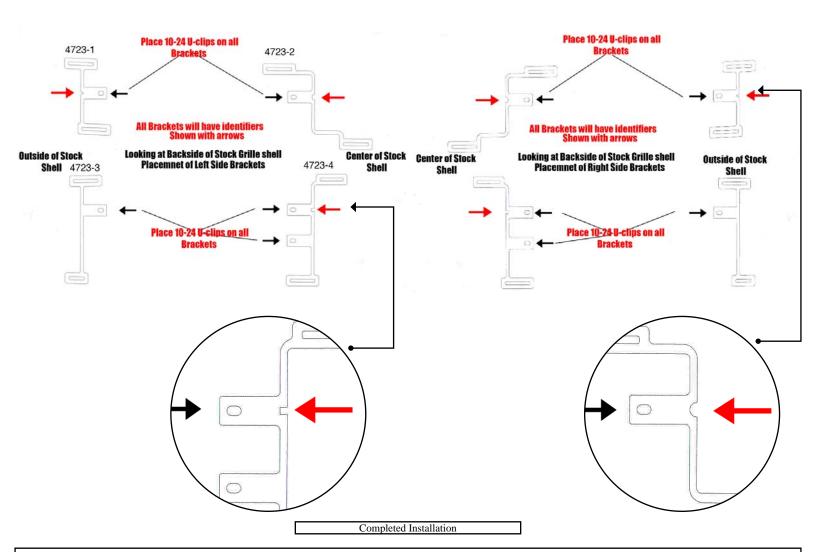

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & Accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.