
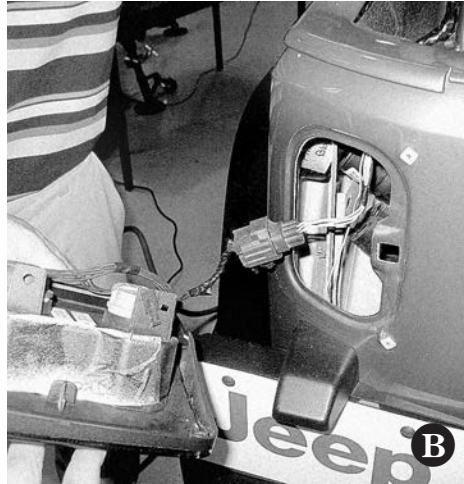
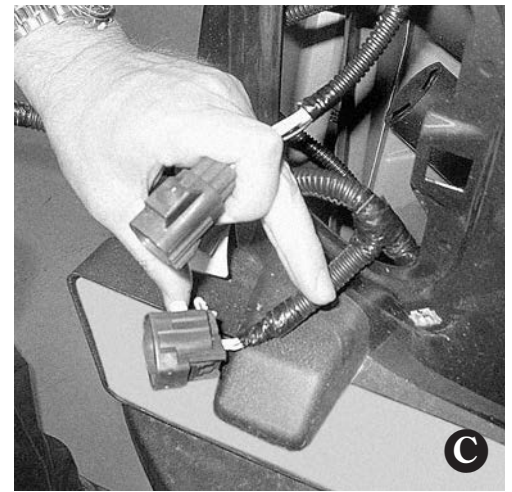


## Installation Instructions

### T-Connector

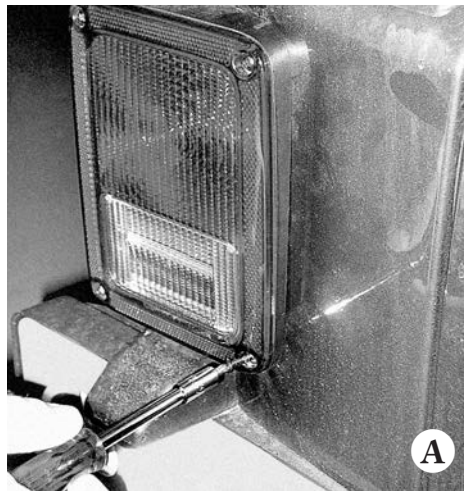

#### TOOLS NEEDED

Screwdriver & Drill (3/32" Drill Bit)

1. Starting on the driver's side, remove the screws that hold the taillight in place **A**. Carefully pull the taillight away from the vehicle to expose the vehicle wiring harness connectors in the pocket behind the taillight **B**.

2. Separate the vehicle's wiring connectors, being careful not to break the locking tabs **C**.

Check to see that the mating surfaces of the vehicle wiring connectors match the T-Connector ends. All connector surfaces should be clean and free of dirt. Plug harness into connectors found in step 1. Be careful not to damage the locking tabs and be sure that connectors are fully inserted with locking tabs in place.

3. On the driver's side, locate a suitable grounding point near the connector such as an existing ground stud or drill a 3/32" hole and secure the white wire using the eyelet and screw provided. (Do not drill into vehicle floor or bed.) Clean dirt and rustproofing from area.

#### ⚠ CAUTION

Verify what is behind any surface prior to drilling to avoid damage to the vehicle and/or personal injury. Do not drill into any exposed surfaces.

4. On the driver's side, route the T-Connector end with the 4-Flat down through the taillight pocket between the bumper and body and towards the center of the bumper. Secure wires with cable ties provided.

5. Secure the remainder of the T-Connector harness with the cable ties provided, to prevent damage or rattling and being careful to avoid any areas that would pinch, cut or melt the wire.

Secure all loose wires and mount the Trailer Tow Harness in an accessible location with a bracket or electrical box (not included).

#### ⚠ WARNING

All connections must be complete for the T-Connector to function properly. Test and verify installation with a test light or trailer once installed.

6. Reinstall the taillight removed in step 1.

#### 🔥 ⚠ WARNING

Overloading circuit can cause fires. DO NOT exceed lower of towing manufacturer rating or:

- Max. stop/turn light: (7.5 amps)
- Max. tail lights: (7.5 amps)

Read vehicle's owners manual & instruction sheet for additional information.