




Installation Instructions

Electronic Trailer Brake Control Wiring Adapter

VEHICLE STOP LAMP SWITCH TO BRAKE CONTROLLER (INPUT)

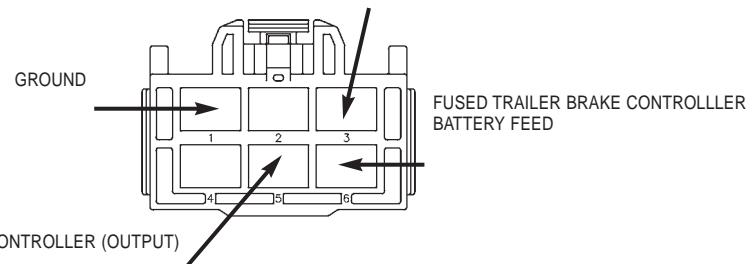

Wiring Adapter Housing (containing Male Terminals) - Wire Side

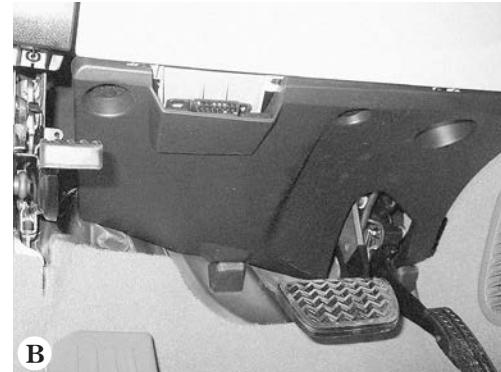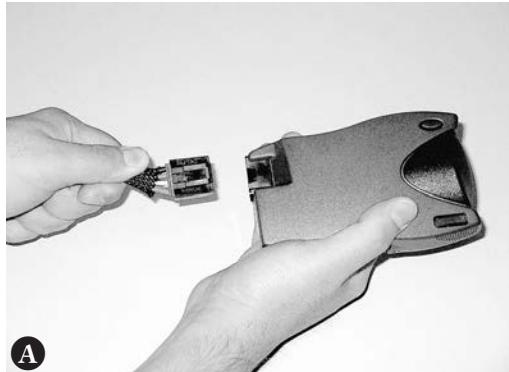

TOOLS REQUIRED:

Trim Panel Remover

CAUTION

Plug brake control adapter into mating receptacle on backside of brake control before attaching to the vehicle connector **A**.

1. Carefully remove vehicle trim panel underneath dash making sure not to pull on courtesy lamp wires that are attached **B**.
2. Locate the vehicle's electric brake control harness connector **C**. The harness will be located underneath the dash and left of the steering column, taped to another harness near the emergency brake pedal. There will be a 6-pin connector that mates with the one on the adapter.
3. Plug the brake control adapter into the vehicle electric controller connector **D**.

4. Complete the installation per the electric brake control manufacturer's instructions and mount the unit as directed. Perform test procedures as instructed.

NOTE

Vehicles not equipped with OEM trailer tow package, may require fuses and relays to complete output and battery feed circuits (sold separately). Consult owners manual for locations.

⚠️ WARNING

Overloading circuit can cause fires. DO NOT exceed lower of towing manufacturer rating or:

- Max. 4 AXLES: 8 BRAKES (24 amps)
Read vehicle's owners manual & instruction sheet for additional information.