
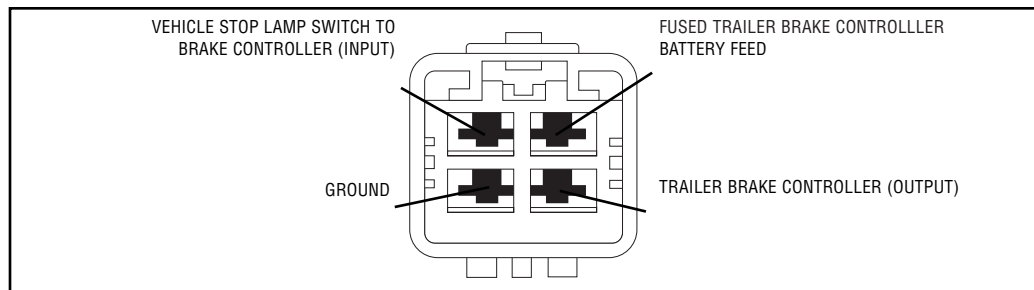
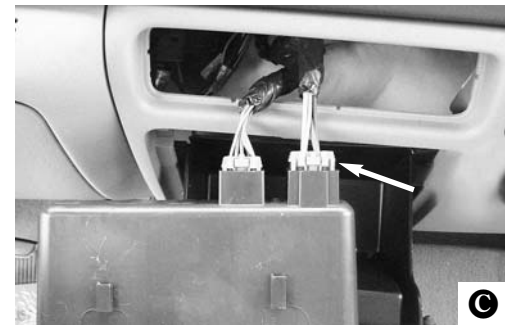


Installation Instructions

Electric Trailer Brake Control Wiring Adapter

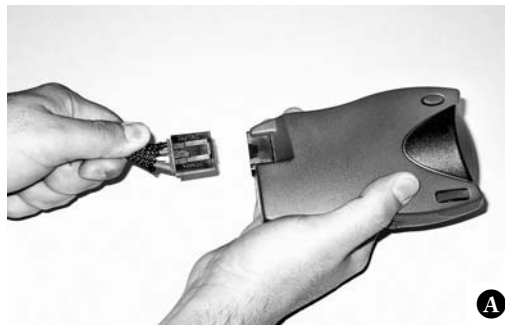

CAUTION

Plug brake control adapter into mating receptacle on backside of brake control before attaching to the vehicle connector **A**.

1. Locate the vehicle's electric brake control harness. This harness is located behind the storage pocket just above the vehicle's ashtray towards the center of the dashboard **B**. Carefully remove the storage pocket and locate the 4-pin Grey harness connector plugged into the rear of the pocket that matches the end of the brake control adapter **C**.
2. Disconnect the harness from the storage pocket **D**. Plug the brake control adapter into the vehicle's electric brake control harness connector. Follow all brake control manufacturer's installation instructions.

NOTE: Vehicles not equipped with OEM trailer tow package, may require fuses and relays to complete output & battery feed circuits (sold separately). Consult owners manual for locations.

⚠ WARNING

Complete the installation per the electric brake control manufacturer's instructions and mount the unit as directed. Perform test procedures as instructed.



⚠ WARNING

Overloading circuit can cause fires. DO NOT exceed lower of towing manufacturer rating or:
• Max.4 axles: 8 brakes (24 amps)
Read vehicle's owners manual and instruction sheet for additional information.