



**PASSENGER | LIGHT TRUCK | TRUCK**

*Welcome to the,*  
**COSMO FAM!**



# TABLE OF CONTENTS

## **PASSENGER**

REAL CAT 17	2
MUCHOMACHO	3
EL JEFE H/T	4
TIGERTAIL	5

## **LIGHT TRUCK**

MUD KICKER	6
EL JEFE H/T <sup>2</sup>	7
EL JEFE VAN	8
EL TIGRE	9

## **TRUCK**

### **ALL POSITION**

CT519T	10
CT512+	10
CT516+	11
CT518+	11
CT520+	12
CT566+	12
CT575+	13
CT578+	13
CT588+	14
CT599+	14

### **MIXED SERVICE**

CT601+	15
CT603+	15

### **DRIVE**


CT701+	16
CT706+	16
CT708+	17
CT719+	17
CT778+	18
CT798+	18





- Premium ride comfort
- Smooth rolling resistance
- Quiet ride technology
- Excellent in wet conditions
- Performance and control

## Features



## RealCat17

Size		Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	EU Labeling
185/60R15	RH	84	H	500/A/A	5.5	44	1100	603	189	8	E/C/69dB
185/65R15	RH	88	H	500/A/A	5.5	44	1230	621	189	8	E/C/69dB
195/55R15	RH	85	V	500/A/A	6.0	44	1140	595	201	8	E/C/69dB
195/60R15	RH	88	V	500/A/A	6.0	44	1230	615	201	8	E/C/69dB
195/65R15	RH	91	H	500/A/A	6.0	44	1355	635	201	8	E/C/69dB
205/60R15	RH	91	V	500/A/A	6.0	44	1355	627	209	8	E/C/69dB
205/65R15	RH	94	H	500/A/A	6.0	44	1480	647	209	8	E/C/69dB
215/65R15	RH	100	H	500/A/A	6.5	50	1765	661	221	8	E/C/69dB
195/50R16	RH	84	V	500/A/A	6.0	44	1100	602	201	8	E/C/69dB
195/55R16	RH	87	V	500/A/A	6.0	44	1200	620	201	8	E/C/69dB
205/55R16	RH	91	V	500/A/A	6.5	44	1355	632	214	8	E/C/69dB
205/60R16	RH	92	V	500/A/A	6.0	44	1390	652	209	8	E/C/69dB
205/65R16	RH	95	V	500/A/A	6.0	44	1520	672	209	8	E/C/69dB
215/60R16	RH	95	V	500/A/A	6.5	44	1520	664	221	8	E/C/69dB
225/60R16	RH	98	V	500/A/A	6.5	44	1655	676	228	8	E/C/69dB
215/55R16	RH	93	V	500/A/A	7.0	44	1435	642	226	8	E/C/69dB
215/45ZR17	RH	87	W	500/A/A	7.0	44	1200	626	213	8	E/C/69dB
215/50ZR17	RH	91	W	500/A/A	7.0	44	1355	648	226	8	E/C/69dB
215/55ZR17	RH	94	W	500/A/A	7.0	44	1480	668	226	8	E/C/69dB
225/45ZR17	RH	91	W	500/A/A	7.5	44	1355	634	225	8	E/C/69dB
225/50ZR17 XL	RH	98	W	500/A/A	7.0	50	1655	658	233	8	E/C/69dB
235/45ZR17 XL	RH	97	W	500/A/A	8.0	50	1610	644	236	8	E/C/69dB
245/45ZR17	RH	95	W	500/A/A	8.0	44	1520	652	243	8	E/C/69dB




Includes industry-leading Road-Hazard Warranty. See page 20 for more details.



- Performance and control
- Stability at high speeds
- Sport driving characteristics
- Superior control in both wet and dry conditions

## Features



## MuchoMacho

Size	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	EU Labeling	
195/45ZR16 XL	RH	84	W	300/AA/A	6.5	50	1100	582	195	7.6	C/B/70dB
205/45ZR16 XL	RH	87	W	300/AA/A	7.0	50	1200	588	209	7.6	C/B/70dB
205/55ZR16 XL	RH	94	W	300/AA/A	6.5	50	1480	214	632	7.6	C/B/70dB
205/40ZR17 XL	RH	84	W	300/AA/A	7.5	50	1100	594	209	7.6	C/B/70dB
205/45ZR17 XL	RH	88	W	300/AA/A	7.0	50	1230	614	203	7.6	C/B/70dB
205/50ZR17 XL	RH	93	W	300/AA/A	6.5	50	1435	638	214	7.6	C/B/70dB
215/40ZR17 XL		87	W	300/AA/A	7.5	50	1200	601	215	7.6	C/B/70dB
215/55ZR17 XL	RH	98	W	300/AA/A	7.0	50	1655	226	668	7.6	C/B/70dB
225/45ZR17 XL	RH	94	W	300/AA/A	7.5	50	1480	634	225	7.6	C/B/70dB
225/55ZR17 XL	RH	101	W	300/AA/A	7.0	50	1820	680	233	7.6	C/B/70dB
235/55ZR17 XL	RH	103	W	300/AA/A	7.5	50	1930	687	241	7.6	C/B/70dB
245/40ZR17 XL		95	W	300/AA/A	8.5	50	1520	628	248	7.6	C/B/70dB
245/45ZR17 XL	RH	99	W	300/AA/A	8.0	50	1710	649	239	7.6	C/B/70dB
225/50ZR17 XL	RH	98	W	300/AA/A	7.0	50	1655	233	658	7.6	C/B/70dB
215/40ZR18 XL		89	Y	300/AA/A	7.5	50	1280	626	215	7.6	C/B/70dB
225/40ZR18 XL		92	Y	300/AA/A	8.0	50	1390	637	230	7.6	C/B/70dB
225/45ZR18 XL	RH	95	Y	300/AA/A	7.5	50	1520	656	222	7.6	C/B/70dB
235/40ZR18 XL		95	Y	300/AA/A	8.5	50	1520	642	237	7.6	C/B/70dB
235/45ZR18 XL	RH	98	Y	300/AA/A	8.0	50	1655	666	232	7.6	C/B/70dB
235/50ZR18 XL	RH	101	Y	300/AA/A	7.5	50	1820	690	241	7.6	C/B/70dB
245/40ZR18 XL		97	Y	300/AA/A	8.5	50	1610	650	244	7.6	C/B/70dB
245/45ZR18 XL	RH	100	Y	300/AA/A	8.0	50	1765	677	243	7.6	C/B/70dB
255/35ZR18 XL		94	Y	300/AA/A	9.0	50	1480	633	256	7.6	C/B/72dB
265/35ZR18 XL		97	Y	300/AA/A	9.5	50	1610	640	267	7.6	C/B/72dB
235/35ZR19 XL		91	Y	300/AA/A	8.5	50	1355	645	237	7.6	C/B/70dB
235/40ZR19 XL		96	Y	300/AA/A	8.5	50	1565	668	237	7.6	C/B/70dB
245/35ZR19 XL		93	Y	300/AA/A	8.5	50	1435	652	244	7.6	C/B/70dB
245/40ZR19 XL		98	Y	300/AA/A	8.5	50	1655	676	244	7.6	C/B/70dB
245/45ZR19 XL	RH	102	Y	300/AA/A	8.0	50	1875	700	239	7.6	C/B/70dB
255/35ZR19 XL		96	Y	300/AA/A	9.0	50	1565	659	256	7.6	C/B/72dB
275/30ZR19 XL		96	Y	300/AA/A	9.5	50	1565	645	274	7.6	C/B/72dB
245/40ZR20 XL		99	Y	300/AA/A	8.5	50	1710	701	244	7.6	C/B/70dB
245/45ZR20 XL	RH	103	Y	300/AA/A	8.0	50	1930	725	239	7.6	C/B/70dB
255/35ZR20 XL		97	Y	300/AA/A	9.0	50	1610	684	256	7.6	C/B/72dB
275/35ZR20 XL		102	Y	300/AA/A	9.5	50	1875	698	274	7.6	C/B/72dB
275/40ZR20 XL		106	Y	300/AA/A	9.5	50	2095	728	278	7.6	C/B/72dB
315/35ZR20 XL		110	W	300/AA/A	11.0	50	2335	728	320	7.6	C/B/74dB



Includes industry-leading Road-Hazard Warranty. See page 20 for more details.



## EL JEFE HT




Size		Ply Rating	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
215/70R15		STD	98	H	560 A A	6.5	44	1655	683	221	8.5
215/70R16		STD	100	H	560 A A	6.5	44	1765	708	221	8.5
225/70R16		STD	103	H	560 A A	6.5	44	1930	722	228	8.5
235/70R16		STD	106	H	560 A A	7.0	44	2095	736	240	8.5
245/70R16		XL	111	H	560 A A	7.0	50	2405	750	248	8.5
265/70R16		STD	112	H	560 A A	8.0	44	2470	778	272	8.5
225/65R17		STD	102	H	560 A A	6.5	44	1875	724	228	8.5
235/65R17		XL	108	H	560 A A	7.0	50	2205	738	240	8.5
245/65R17		XL	111	H	560 A A	7.0	50	2405	750	248	8.5
245/70R17		STD	110	H	560 A A	7.0	44	2335	776	248	8.5
265/65R17		STD	112	H	560 A A	8.0	44	2470	776	272	8.5
265/70R17		STD	115	H	560 A A	8.0	44	2680	804	272	8.5
265/60R18		STD	110	H	560 A A	8.0	44	2335	775	272	8.5
265/50R20		XL	112	V	560 A A	8.5	50	2470	774	277	8.5
275/55R20		XL	117	V	560 A A	8.5	50	2835	810	284	8.5



Includes industry-leading Road-Hazard Warranty. See page 20 for more details.



## TIGERTAIL

Size	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	
215/65R16 XL	 RH	102	V	360 AA	6.5	50	1875	681	218	8.06
215/60R17 XL	 RH	100	V	360 AA	6.5	50	1765	686	218	8.06
215/55R18 XL	 RH	99	V	360 AA	7.0	50	1710	690	223	7.87
235/55ZR18 XL	 RH	104	W	360 AA	7.5	50	1985	712	241	7.87
235/60R18 XL	 RH	107	V	360 AA	7.0	50	2150	735	236	8.06
285/45R19 XL	 RH	111	V	360 AA	9.5	50	2405	736	281	7.87
275/40ZR20 XL		106	Y	360 AA	9.5	50	2095	725	274	7.87
315/35ZR20 XL		110	W	360 AA	11.0	50	2335	725	315	7.87
285/35ZR22 XL		106	W	360 AA	10.0	50	2095	756	286	7.87



Includes industry-leading Road-Hazard Warranty. See page 20 for more details.



## MUD KICKER

Size	Ply Rating	Load Index	Speed Rating	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Sidewall Construction(PR)
LT245/75R16	10	120/116	Q	7.0	80	3042/2778	780	248	15.2	2P
LT265/70R17	10	121/118	Q	8.0	80	31952/2910	810	272	15.2	2P
LT275/70R18	10	125/122	Q	8.0	80	3640/3305	849	279	15.2	3P
LT33X12.5R18	10	118	Q	10.0	65	2910	832	318	16.7	3P
LT35X12.5R18	10	123	Q	10.0	65	3415	883	318	16.7	3P
LT305/55R20	10	121/118	Q	9.5	65	3195/2910	850	316	16.7	3P
LT33X12.5R20	12	119	Q	10.0	80	3000	832	318	16.7	3P
LT35X12.5R20	12	125	Q	10.0	80	3640	883	318	16.7	3P
LT35X13.5R20	12	126	Q	11.0	80	3750	883	345	16.7	3P
LT37X13.5R20	12	128	Q	11.0	80	3970	934	345	16.7	3P
LT33X12.5R22	12	114	Q	10.0	80	2600	832	318	16.7	3P
LT35X12.5R22	12	121	Q	10.0	80	3195	883	318	16.7	3P





- Quiet ride technology
- 4 main grooves that enable extra drainage
- Advanced rubber compound and extra plies resist cuts and punctures
- All-season design with closed shoulders for added safety

## Features



Enhanced Mileage



Optimized Handling

## EL JEFE HT<sup>2</sup>

Size	PLY Rating	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	NSD 32	
LT235/75R15	RH	8	116/113	Q	-	6.50x15	65	732	239	10.20	12.85
LT215/85R16	RH	10	115/112	Q	-	6.00x16	80	769	219	10.20	12.85
LT225/75R16	RH	10	115/112	Q	-	6.00x16	80	744	226	10.20	12.85
LT235/85R16	RH	10	120/116	Q	-	6.50x16	80	802	235	10.20	12.85
LT245/75R16	RH	10	120/116	Q	-	7.00x16	80	774	250	10.20	12.85
LT265/75R16	RH	10	123/120	Q	-	7.50x16	80	804	272	10.20	12.85
LT285/75R16	RH	10	126/123	Q	-	8.00x16	65	832	292	10.20	12.85
LT235/80R17	RH	10	120/117	Q	-	6.50x17	80	807	239	10.20	12.85
LT265/70R17	RH	10	121/118	Q	-	8.00x17	80	803	270	10.20	12.85
LT285/70R17	RH	10	121/118	Q	-	8.50x17	80	831	291	10.20	12.85



Includes industry-leading Road-Hazard Warranty. See page 20 for more details.



## EL JEFE VAN

Size	Ply Rating	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	EU Labeling
235/65R16C	10	121/119	R	-	7.0	83	3200	710	242	11.10	-




## EL TIGRE AT


Size	Ply Rating	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air psi	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
235/75R15	STD	105	T	540 A B	6.5	44	2040	733	235	9.6
LT235/75R15	6	104/101	S	-	6.5	50	1985/1820	733	235	11.0
31X10.5R15LT	6	109	S	-	8.5	50	2270	775	268	12.0
235/70R16	STD	106	T	540 A B	7.0	44	2095	736	240	9.6
265/70R16	STD	112	T	540 A B	8.0	44	2470	778	272	9.6
LT215/85R16	10	115/112	S	-	6.0	80	2680/2470	772	216	11.0
LT225/75R16	10	115/112	S	-	6.0	80	2680/2470	744	223	11.0
LT235/85R16	10	120/116	S	-	6.5	80	3042/2778	806	235	12.0
LT245/75R16	10	120/116	S	-	7.0	80	3042/2778	774	248	12.0
LT265/75R16	10	123/120	S	-	7.5	80	3415/3085	804	267	12.0
LT285/75R16	10	126/123	S	-	8.0	80	3750/3145	834	286	12.0
245/65R17	STD	107	T	540 A B	7.0	44	2150	750	248	9.6
265/65R17	STD	112	T	540 A B	8.0	44	2470	776	272	9.6
265/70R17	STD	115	T	540 A B	8.0	44	2680	804	272	9.6
LT235/80R17	10	120/117	S	-	6.5	80	3085/2835	808	235	12.0
LT245/75R17	10	121/118	S	-	7.0	80	3195/2910	800	248	12.0
LT265/70R17	10	121/118	S	-	8.0	80	3195/2910	804	272	12.0
LT285/70R17	10	121/118	S	-	8.5	80	3195/2910	832	292	12.0
35X12.50R17LT	10	121	S	-	10.0	65	3195	877	318	12.0
275/55R20	XL	117	T	540 A B	8.5	50	2835	810	284	9.6
275/60R20	STD	115	T	540 A B	8.0	44	2680	838	279	9.6
285/55R20	STD	115	T	540 A B	9.0	44	2680	822	297	9.6



## Recommended Wheel Position



## Features

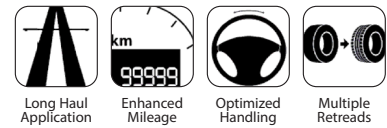


## CT519T : Trailer Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142M	14	TL	(S)2800/6175 (D)2650/5840	720/105	8.25	1054	279	10.32
295/75R22.5	144/141L	14	TL	(S)2800/6175 (D)2575/5675	760/110	9.00	1014	298	10.32
11R24.5	146/143L	14	TL	(S)3000/6615 (D)2725/6005	720/105	8.25	1104	279	10.32
285/75R24.5	144/141L	14	TL	(S)2800/6175 (D)2575/5675	760/110	8.25	1049	282	10.32


- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and braking performance in wet and dry conditions
- Advanced construction and compound design for high speed and long distance performance
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features




## CT512+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
7.50R16LT	122/121L	14	TT	(S) 1510/3330 (D) 1450/3195	690/100	6.00	805	203	11.9
8.25R16LT	128/126L	14	TT	(S) 1800/3970 (D) 1700/3750	670/98	6.59	855	224	12.8
9.50R17.5	129/127J	14	TL	(S) 1850/4080 (D) 1750/3860	750/108	6.75	842	236	13.5
9.50R17.5	143/141J	16	TL	(S) 2725/6005 (D) 2575/5675	875/127	6.75	842	236	13.5

- 5 rib tread design with wide shoulder for excellent handling
- Micro-siping for maximum traction at all stages of tire life
- Reinforced casing for more retreads



## Recommended Wheel Position



## Features




### CT516+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
7.50R16LT	122/121L	14	TL	(S)1510/3330 (D)1450/3195	690/100	6.00	805	215	12.7


- Wider tread
- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and breaking performance in wet and dry conditions
- Advanced compound with low heat generation for increased durability
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features

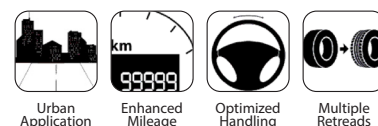


### CT518+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1052	282	12.7
11R22.5	148/145L	16	TL	(S) 3150/6940 (D) 2900/6395	850/123	8.25	1052	282	12.7
295/75R22.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/106	9.00	1014	296	12.7
11R24.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/106	8.25	1102	282	12.7
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2750/6005	830/120	8.25	1102	282	12.7
285/75R24.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/106	8.25	1054	283	12.7


- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and breaking performance in both wet and dry conditions
- Advanced construction and compound design for high speed and long distance performance
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features




## CT520+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
385/65R22.5 <sup>Ⓔ</sup>	164K	20	TL	(S)4250/9370 (4500/9921)	830/120	11.75	1080	380	15.5


- 6 rib tread design with wide shoulders for excellent handling stability and resistance to uneven wear
  - 5 circumferential wave grooves provide more evacuation capability creating efficient performance in wet and dry conditions
  - Specialized compounds offer low rolling resistance and longer mileage
  - Strengthened casing for multiple retreads
- <sup>Ⓔ</sup> EU Certified



## Recommended Wheel Position



## Features




## CT566+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
285/75R24.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/110	8.25	1049	283	14.3


- Combination rib and lug pattern provides high traction and superior resistance to irregular wear
- 4 grooves for excellent performance on wet, dry or snowy roads
- Advanced tread design with low heat generation for long distance performance
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features




## CT575+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
255/70R22.5	140/137L	16	TL	(S) 2500/5510 (D) 2300/5070	830/120	7.50	930	255	12.7


- Advanced tread design provides optimum tread wear to enhance mileage performance
- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and breaking performance in wet and dry conditions



## Recommended Wheel Position

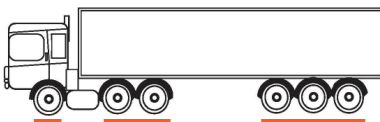

## Features




## CT578+ : All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1049	275	14.3
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	275	14.3
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1116	279	14.3
11R24.5	149/146L	16	TL	(S) 3250/7160 (D) 3000/6610	830/120	8.25	1116	279	14.3
295/75R22.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/110	9.00	1049	283	14.3
295/75R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	9.00	1049	283	14.3

- Advanced tread design reduces potential for irregular wear by controlling the shape and pressure distribution of the tire footprint
- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and breaking performance in wet and dry conditions
- Premium tread compound promotes enhanced mileage



## Recommended Wheel Position



## Features



Regional Application



Enhanced Mileage



Optimized Handling



Multiple Retreads


## CT588+ : All Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
215/75R17.5	126/124L	14	TL	(S) 1700/3750 (D) 1600/3255	690/100	6.00	776	225	12.7
215/75R17.5	135/133J	16	TL	(S) 2180/4805 (D) 2060/4540	850/122	6.00	776	225	12.7
235/75R17.5	143/141L	16	TL	(S) 2725/6008 (D) 2575/5677	790/115	6.75	797	233	14.0
225/70R19.5	128/126M	14	TL	(S) 1800/3970 (D) 1700/3750	760/110	6.75	811	226	12.7
245/70R19.5	135/133L	16	TL	(S) 2180/4805 (D) 2060/4540	830/120	7.50	839	248	14.0
265/70R19.5	140/138L	16	TL	(S) 2500/5510 (D) 2360/5205	830/120	7.50	873	262	14.0
10.00R20	146/143L	16	TT	(S) 3000/6610 (D) 2725/6005	830/120	7.50	1051	274	15.9
11.00R20	150/147K	16	TT	(S) 3350/7390 (D) 3075/6780	830/120	8.00	1095	298	16.0
12R22.5	150/147K	16	TL	(S) 3350/7390 (D) 3075/6780	830/120	9.00	1085	300	16.0
295/80R22.5	150/147M	16	TL	(S) 3350/7390 (D) 3075/6780	830/120	9.00	1055	290	16.7
295/80R22.5	152/149M	18	TL	(S) 3550/7830 (D) 3250/7160	900/130	9.00	1055	290	16.7
315/80R22.5	154/151M	18	TL	(S) 3750/8270 (D) 3450/7610	830/120	9.00	1083	318	17.5
315/80R22.5	158/150L	20	TL	(S) 3750/8270 (D) 4250/9370	900/130	9.00	1083	318	17.5

- 5 rib tread design with wide shoulder for excellent handling
- 4 wide straight grooves for efficient water evacuation and braking performance in wet and dry conditions
- Advanced construction and compound design for high-speed and long distance performance
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features



Regional Application



Enhanced Mileage



Optimized Handling



Multiple Retreads



Extra Traction

## CT599+ : All Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
295/80R22.5	(E) 154/149M	16	TL	(S) 3750/8270 (D) 3250/7160	850/123	9.00	1056	306	16.5
315/80R22.5	(E) 156/150L	18	TL	(S) 4000/8819 (D) 3350/7390	850/123	9.00	1084	318	17.5


(E) EU Certified

- 5 rib tread design with wide shoulder for excellent handling performance
- Prism grooves at center for greater water evacuation and grip performance on wet, dry or snowy roads
- 3D sipes resist irregular wear and strengthens tread durability along with reducing snow retention
- Tread wear resistors guard against irregular wear which results in longer mileage and improves casing and stone ejection






## Recommended Wheel Position



## Features

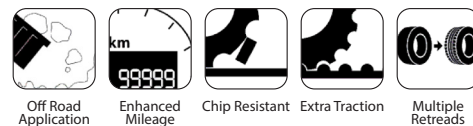


# CT601+ : On/Off Road All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
7.50R16LT	122/121L	14	TL	(S) 1510/3330 (D) 1450/3195	690/100	6.00	805	203	12.7
9.00R20	141/139K	14	TT	(S) 2575/5675 (D) 2430/5355	790/ 115	7.00	1028	258	15.0
10.00R20	146/143K	16	TT	(S) 3000/6610 (D) 2725/6005	830/120	7.50	1059	272	15.9
11.00R20	150/147K	16	TT	(S) 3350/7390 (D) 3075/6780	830/ 120	8.00	1084	291	16.7
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1060	285	16.6
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1060	285	16.6
385/65R22.5	160K	20	TL	(S) 4500/9920	900/130	11.75	1072	386	16.0
315/80R22.5	157/154L	20	TL	(S) 4120/9090 (D) 3750/8270	900/130	9.00	1076	312	17.5
11R24.5	149/146L	16	TT	(S) 3250/8270 (D) 3000/7610	830/120	8.00	1186	293	17.5
12R24.5	152/149K	16	TL	(S) 3550/7830 (D) 3250/7160	830/120	9.00	1135	300	17.5


- Combination of rib and lug pattern for high traction and superior resistance to irregular wear
- 3 zigzag grooves for excellent grip performance on wet, dry or snowy roads
- Advanced cut and chip compound provides anti-abrasion and resistance to cutting and tearing
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features

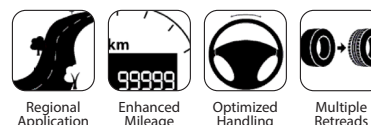

# CT603+ : On/Off Road All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
12.00R20	154/151K	18	TT	(S) 3750/8270 (D) 3450/7610	830/120	8.50	1118	305	18.5
12.00R24	160/157K	20	TT	(S) 4500/9920 (D) 4125/9090	900/131	8.50	1225	310	19.1

- Big block pattern and solid shoulder design for excellent handling stability and superior resistance to irregular wear
- 3 zigzag grooves for excellent grip performance on wet, dry or snowy roads
- Advanced compound with low heat generation for increased durability
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features




## CT701+ : Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1054	279	23.5
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	279	23.5
11R22.5	148/145L	16	TL	(S) 3150/6940 (D) 2900/6395	850/123	8.25	1054	279	23.5
295/80R22.5	150/147L	16	TL	(S) 3350/7390 (D) 3075/6780	830/120	9.00	1052	298	23.5
295/80R22.5	152/149L	18	TL	(S) 3550/7830 (D) 3250/7160	900/130	9.00	1052	298	23.5
315/80R22.5	154/151L	18	TL	(S) 3750/8270 (D) 3450/7610	830/120	9.00	1083	314	23.8
315/80R22.5	158/150L	20	TL	(S) 4250/9370 (D) 3350/7390	900/130	9.00	1082	314	23.8
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1097	275	23.8
11R24.5	149/146L	16	TL	(S) 3250/7160 (D) 3000/6610	830/120	8.25	1097	275	23.8


- Block pattern and open shoulder design for excellent traction and superior resistance to irregular wear
- Block and groove design for excellent grip performance on wet, dry or snowy roads
- Advanced compound and construction for loading performance and increased durability
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features

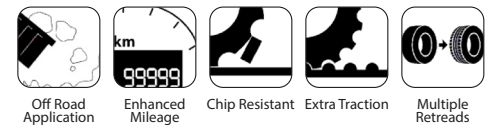


## CT706+ : Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
225/70R19.5	128/126M	14	TL	(S)1800/3970 (D)1700/3750	760/110	6.75	811	226	14.4
245/70R19.5	135/133M	16	TL	(S)2180/4805 (D)2060/4540	830/120	7.50	839	248	15.0






- Lug pattern design provides more traction and superior resistance to irregular wear
- Grooves arranged for excellent grip performance in off-road conditions
- Advanced cut and chip compounds provide anti-abrasion and resistance to cutting and tearing
- Strengthened casing for more retreads



### Recommended Wheel Position



### Features

-   
Long Haul Application
-   
Enhanced Mileage
-   
Optimized Handling
-   
Multiple Retreads
-   
Extra Traction


## CT708+ : Drive Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
285/75R24.5	147/144L	16	TL	(S) 3075/6780 (D) 2800/6175	830/120	8.25	1054	283	22.0






- Combination rib and lug pattern provides high traction and superior resistance to irregular wear
- 4 grooves for excellent performance on wet, dry or snowy roads
- Advanced tread design with low heat generation for long distance performance
- Strengthened casing for more retreads



### Recommended Wheel Position



### Features

-   
Regional Application
-   
Enhanced Mileage
-   
Optimized Handling
-   
Multiple Retreads
-   
Extra Traction

## CT719+ : Drive Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
295/80R22.5 <sup>Ⓔ</sup>	152/148M	16	TL	(S) 3550/7830 (D) 3150/6940	850/123	9.00	1063	306	20.0
315/80R22.5 <sup>Ⓔ</sup>	156/150L	18	TL	(S) 4000/8820 (D) 3350/7390	850/123	9.00	1089	318	20.5

<sup>Ⓔ</sup> EU Certified


- Block pattern with wide tread shoulder designed for enhanced handling, grip and traction performance and resistant to irregular wear
- 3D sipe design for excellent grip and traction performance on wet, dry or snowy roads
- Advanced compound and construction for loading performance and increased durability
- Strengthened casing for more retreads



## Recommended Wheel Position



## Features

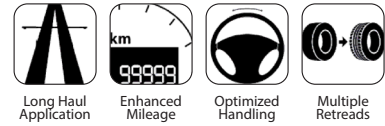


## CT778+ : Drive Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1060	284	20.6
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	275	20.6
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1116	279	20.6
11R24.5	149/146L	16	TL	(S) 3250/7160 (D) 3000/6610	830/120	8.25	1116	279	20.6
295/75R22.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/110	9.00	1014	296	22
295/75R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	9.00	1014	296	22


- Designed with three rows of aggressive tread blocks for superior traction and resistance
- Closed shoulder tread design provides long, even wear while providing excellent traction
- Premium tread compound promotes enhanced mileage
- Heavy duty casing provides durability for more retreads



## Recommended Wheel Position



## Features

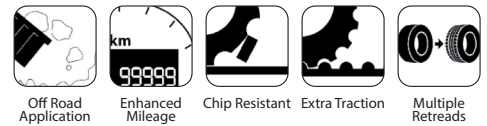

## CT798+ : Drive Wheel Position

Size	Load Index/Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/psi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
325/95R24	162/160K	22	TT	(S)4750/10472 (D)4500/9921	850/123	9.00	1230	314	21.0

- Aggressive block pattern design for excellent handling and traction performance
- Specialized tread compound with improved resistance against cutting, chipping and tearing
- Excellent grip force on mud and snow
- Self-cleaning knobs and stone ejectors