

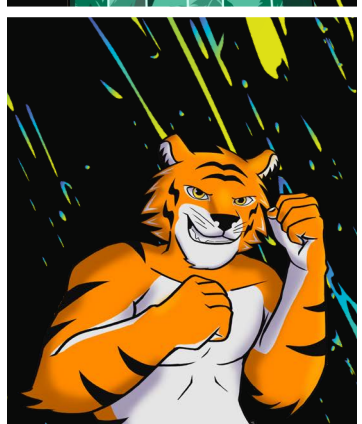
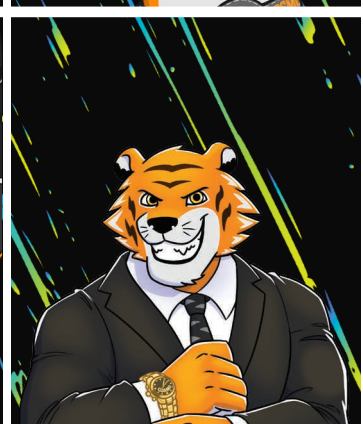
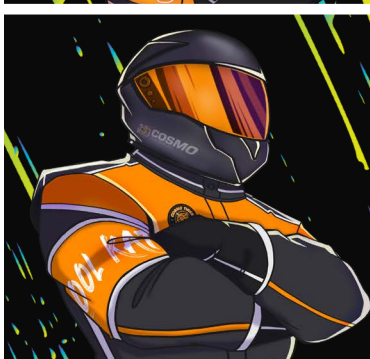
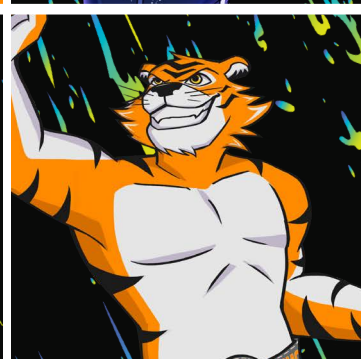
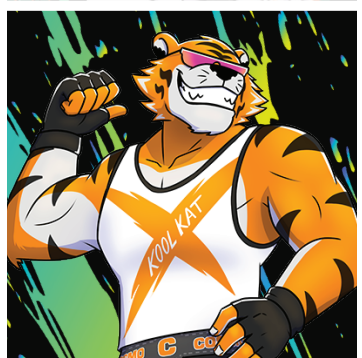


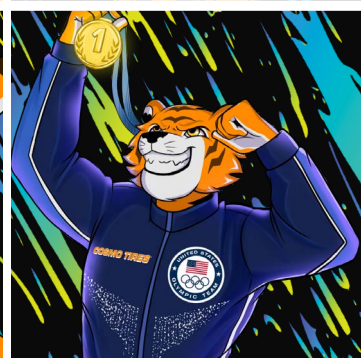

COSMO TIRES[®]

PASSENGER / LIGHT TRUCK / TRAILER / VAN

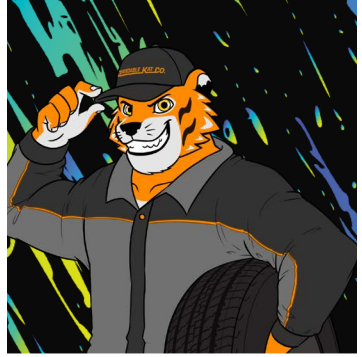

PASSENGER

SIDEWALL LOGOS	2
KURRENT	3
REAL CAT 17	4
MUCHOMACHO	5
TIGERTAIL	6

LIGHT TRUCK

EL JEFE HT	7
EL JEFE HT 2	8
EL TIGRE AT	9
GRIPIT XT	10
MUD KICKER	11
KAT ENERGY	12
CT516+	12

VAN

EL JEFE VAN	13
EL JEFE VAN II	13
EL JEFE VAN III	14
EL JEFE VAN V	14

SPECIALTY TRAILER

STRAY KAT	15
STRAY KAT II	15
STRAY KAT III	16
STRAY KAT IV	16

WARRANTY


LIMITED WARRANTY	17
MILEAGE WARRANTY	18
ROAD HAZARD WARRANTY	19

SIDEWALL LOGOS



Cosmo Tires marked with this logo have been engineered to provide best in class noise reduction & enhance the quiet car experience. Cosmo Tires proprietary UTT (Ultimate Tire Technology) is at the core of creating a quieter and more comfortable tire for today's technologically advanced vehicles.

This thoughtfully designed icon, positioned on the center rib of the tire, serves as a sophisticated gauge for monitoring treadwear. It provides a clear, visible signal, offering consumers a convenient and intuitive way to assess the remaining tread depth. This feature helps ensure you're always informed about your tire's performance and safety.



Cosmo has the only Mud Rated tire in the market. These tires have been specifically designed and engineered to perform at optimum levels in deep mud and snow. Functional tread and sidewall design, coupled with specialized compounding (DSS) is at the core of all Cosmo Mud Rated tires.

While there isn't a formal industry standard yet to certify tires specifically for electric vehicles, this designation signifies that the tire has been meticulously engineered and crafted to meet the unique demands of electric vehicles. It's designed with advanced technology (UTT) to ensure optimal performance, safety, and efficiency for EVs.



Identifies tires that have 3 ply sidewall construction. The reinforced sidewall is engineered to maintain structural integrity when facing the most challenging obstacles and terrain.

Cosmo Tires employs proprietary compound technology that enables our products to have lower rolling resistance, better wet traction and longer tread life.



Cosmo is committed to sustainable production that meets or exceeds compliance regulations and only utilizes best-in-class manufacturing facilities that are ISO 14001:2015 certified. Cosmo Tires carry the highest certifications in the industry, with ECE, DOT, GCC, CCC, In Metro, NOM, and TS14969.

Proprietary manufacturing process that includes:

- BRS - BEAD REINFORCEMENT SYSTEM
- NST - NEW STRUCTURE TECHNOLOGY
- DSS - DIRECTED SUPER SILICA
- OPD - OPTIMUM PERFORMANCE DESIGN





- Premium Touring Tire
- Reduced Rolling Resistance
- Quiet Kat Technology
- Extra Load Enhanced (XL)
- Tread Wear Indicator
- EV Ready

Features



KURRENT

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
205/55R16 XL	94	V	600AA	6.5	50	1480	24.9	8.4	10	BSW
215/50R17 XL	95	V	600AA	7.0	50	1520	25.5	8.9	10	BSW
215/55R17 XL	98	V	600AA	7.0	50	1655	26.3	8.9	10	BSW
225/45R18 XL	95	V	600AA	7.5	50	1520	25.9	8.9	9	BSW
225/55R18 XL	102	V	600AA	7.0	50	1875	27.8	9.2	10	BSW
225/60R18 XL	104	H	600AA	6.5	50	1985	28.6	9.0	10	BSW
235/45R18 XL	98	V	600AA	8.0	50	1655	26.3	9.3	10	BSW
235/40R19 XL	96	V	600AA	8.5	50	1565	26.4	9.5	9	BSW
235/55R19 XL	105	V	600AA	7.5	50	2040	29.2	9.6	10	BSW
245/45R19 XL	102	V	600AA	8.0	50	1875	27.7	9.6	10	BSW
255/45R19 XL	104	V	600AA	8.5	50	1985	28.1	10.0	10	BSW
255/50R19 XL	107	V	600AA	8.0	50	2150	29.1	10.4	10	BSW
235/35R20 XL	92	V	600AA	8.5	50	1390	26.5	9.5	9	BSW
235/50R20 XL	104	V	600AA	7.5	50	1985	29.3	9.6	10	BSW
245/40R20 XL	99	V	600AA	8.5	50	1710	27.7	9.8	10	BSW
245/45R20 XL	103	V	600AA	8.0	50	1930	28.7	9.6	10	BSW
255/45R20 XL	105	V	600AA	8.5	50	2040	29.1	10.0	10	BSW
255/50R20 XL	109	V	600AA	8.0	50	2270	30.1	10.4	10	BSW
275/45R20 XL	110	V	600AA	9.0	50	2335	29.8	10.7	10	BSW
285/40R20 XL	108	V	600AA	10.0	50	2205	29.0	11.4	10	BSW
275/50R22 XL	115	H	600AA	8.5	50	2680	32.9	11.2	10	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 70,000 MI



*Colored letters are for illustration only



- Optimal Touring Comfort
- Low Rolling Resistance
- Quiet Kat Technology
- Excellent in Wet Conditions
- Performance and Control

Features



RealCat17

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
185/55R15	82	V	500AA	6.0	44	1050	23.0	7.6	10	BSW
185/60R15	84	H	500AA	5.5	44	1100	23.7	7.4	10	BSW
185/65R15	88	H	500AA	5.5	44	1230	24.4	7.4	10	BSW
195/55R15	85	V	500AA	6.0	44	1140	23.4	7.9	10	BSW
195/60R15	88	V	500AA	6.0	44	1230	24.2	7.9	10	BSW
195/65R15	91	H	500AA	6.0	44	1355	25.0	7.9	10	BSW
205/60R15	91	V	500AA	6.0	44	1355	24.7	8.2	10	BSW
205/65R15	94	H	500AA	6.0	44	1480	25.5	8.2	10	BSW
215/65R15	100	H	500AA	6.5	50	1765	26.0	8.7	10	BSW
185/55R16	83	H	500AA	6.0	44	1070	24.0	7.6	10	BSW
195/50R16	84	V	500AA	6.0	44	1100	23.7	7.9	10	BSW
195/55R16	87	V	500AA	6.0	44	1200	24.4	7.9	10	BSW
205/55R16	91	V	500AA	6.5	44	1355	24.9	8.4	10	BSW
205/60R16	92	V	500AA	6.0	44	1390	25.7	8.2	10	BSW
205/65R16	95	V	500AA	6.0	44	1520	26.5	8.2	10	BSW
215/55R16	93	V	500AA	7.0	44	1435	25.3	8.9	10	BSW
215/60R16	95	V	500AA	6.5	44	1520	26.1	8.7	10	BSW
225/60R16	98	V	500AA	6.5	44	1655	26.6	9.0	10	BSW
215/45ZR17	87	W	500AA	7.0	44	1200	24.6	8.4	10	BSW
215/50ZR17	91	W	500AA	7.0	44	1355	25.5	8.9	10	BSW
215/55ZR17	94	W	500AA	7.0	44	1480	26.3	8.9	10	BSW
225/45ZR17	91	W	500AA	7.5	44	1355	25.0	8.9	10	BSW
225/50ZR17 XL	98	W	500AA	7.0	50	1655	25.9	9.2	10	BSW
235/45ZR17 XL	97	W	500AA	8.0	50	1610	25.4	9.3	10	BSW
245/45ZR17	95	W	500AA	8.0	44	1520	25.7	9.6	10	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 45,000 MI



* Colored letters are for illustration only



- Ultra High Performance
- Stability at High Speeds
- Quiet Kat Technology
- Sport Driving Characteristics
- Superior Control in both Wet and Dry Conditions

Features



Muchomacho

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
195/45ZR16 XL	84	W	300AAA	6.5	50	1100	22.9	7.7	10	BSW
205/45ZR16 XL	87	W	300AAA	7.0	50	1200	23.1	8.2	10	BSW
205/55ZR16 XL	94	W	300AAA	6.5	50	1480	24.9	8.4	10	BSW
205/40ZR17 XL	84	W	300AAA	7.5	50	1100	23.4	8.2	10	BSW
205/45ZR17 XL	88	W	300AAA	7.0	50	1230	24.2	8.0	10	BSW
205/50ZR17 XL	93	W	300AAA	6.5	50	1435	25.1	8.4	10	BSW
215/40ZR17 XL	87	W	300AAA	7.5	50	1200	23.7	8.5	10	BSW
215/55ZR17 XL	98	W	300AAA	7.0	50	1655	26.3	8.9	10	BSW
225/45ZR17 XL	94	W	300AAA	7.5	50	1480	25.0	8.9	10	BSW
225/55ZR17 XL	101	W	300AAA	7.0	50	1820	26.8	9.2	10	BSW
235/55ZR17 XL	103	W	300AAA	7.5	50	1930	27.0	9.5	10	BSW
245/40ZR17 XL	95	W	300AAA	8.5	50	1520	24.7	9.8	10	BSW
245/45ZR17 XL	99	W	300AAA	8.0	50	1710	25.6	9.4	10	BSW
225/50ZR17 XL	98	W	300AAA	7.0	50	1655	25.9	9.2	10	BSW
215/40ZR18 XL	89	Y	300AAA	7.5	50	1280	24.6	8.5	10	BSW
225/40ZR18 XL	92	Y	300AAA	8.0	50	1390	25.1	9.1	10	BSW
225/45ZR18 XL	95	Y	300AAA	7.5	50	1520	25.8	8.7	10	BSW
235/40ZR18 XL	95	Y	300AAA	8.5	50	1520	25.3	9.3	10	BSW
235/45ZR18 XL	98	Y	300AAA	8.0	50	1655	26.2	9.1	10	BSW
235/50ZR18 XL	101	Y	300AAA	7.5	50	1820	27.2	9.5	10	BSW
245/40ZR18 XL	97	Y	300AAA	8.5	50	1610	25.6	9.6	10	BSW
245/45ZR18 XL	100	Y	300AAA	8.0	50	1765	26.7	9.6	10	BSW
255/35ZR18 XL	94	Y	300AAA	9.0	50	1480	24.9	10.1	10	BSW
265/35ZR18 XL	97	Y	300AAA	9.5	50	1610	25.2	10.5	10	BSW
235/35ZR19 XL	91	Y	300AAA	8.5	50	1355	25.4	9.3	10	BSW
235/40ZR19 XL	96	Y	300AAA	8.5	50	1565	26.3	9.3	10	BSW
245/35ZR19 XL	93	Y	300AAA	8.5	50	1435	25.7	9.6	10	BSW
245/40ZR19 XL	98	Y	300AAA	8.5	50	1655	26.6	9.6	10	BSW
245/45ZR19 XL	102	Y	300AAA	8.0	50	1875	27.6	9.4	10	BSW
255/35ZR19 XL	96	Y	300AAA	9.0	50	1565	25.9	10.1	10	BSW
275/30ZR19 XL	96	Y	300AAA	9.5	50	1565	25.4	10.8	10	BSW
245/40ZR20 XL	99	Y	300AAA	8.5	50	1710	27.6	9.6	10	BSW
245/45ZR20 XL	103	Y	300AAA	8.0	50	1930	28.5	9.4	10	BSW
255/35ZR20 XL	97	Y	300AAA	9.0	50	1610	26.9	10.1	10	BSW
275/35ZR20 XL	102	Y	300AAA	9.5	50	1875	27.5	10.8	10	BSW
275/40ZR20 XL	106	Y	300AAA	9.5	50	2095	28.7	10.9	10	BSW
315/35ZR20 XL	110	W	300AAA	11.0	50	2335	28.7	12.6	10	BSW



INCLUDES INDUSTRY LEADING ROAD-HAZARD WARRANTY



ENHANCED MILEAGE WARRANTY: 30,000 MI



- Stability at High Speeds
- Quiet Kat Technology
- Sport Driving Characteristics
- Superior Control in both Wet and Dry Conditions

Features



Tiger Tail

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
215/65R16 XL	102	V	360AA	6.5	50	1875	26.8	8.6	10	BSW
215/60R17 XL	100	V	360AA	6.5	50	1765	27.0	8.6	10	BSW
215/55R18 XL	99	V	360AA	7.0	50	1710	27.2	8.8	10	BSW
235/55ZR18 XL	104	W	360AA	7.5	50	1985	28.0	9.5	10	BSW
235/60R18 XL	107	V	360AA	7.0	50	2150	28.9	9.3	10	BSW
285/45R19 XL	111	V	360AA	9.5	50	2405	29.0	11.1	10	BSW
275/40ZR20 XL	106	Y	360AA	9.5	50	2095	28.5	10.8	10	BSW
315/35ZR20 XL	110	W	360AA	11.0	50	2335	28.5	12.4	10	BSW
285/35ZR22 XL	106	W	360AA	10.0	50	2095	29.8	11.3	10	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 40,000 MI





*Colored letters are for illustration only



- Premium Ride Comfort
- Low Rolling Resistance
- Quiet Kat Technology
- Excellent in Wet Conditions
- Performance and Control

Features



EL JEFE HT

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
215/70R15	98	H	560AA	6.5	44	1655	26.9	8.7	11	BSW
215/70R16	100	H	560AA	6.5	44	1765	27.9	8.7	11	BSW
225/70R16	103	H	560AA	6.5	44	1930	28.4	9.0	11	BSW
235/70R16	106	H	560AA	7.0	44	2095	29.0	9.4	11	BSW
245/70R16 XL	111	H	560AA	7.0	50	2405	29.5	9.8	11	BSW
265/70R16	112	H	560AA	8.0	44	2470	30.6	10.7	11	BSW
225/65R17	102	H	560AA	6.5	44	1875	28.5	9.0	11	BSW
235/65R17 XL	108	H	560AA	7.0	50	2205	29.1	9.4	11	BSW
245/65R17 XL	111	H	560AA	7.0	50	2405	29.5	9.8	11	BSW
245/70R17	110	H	560AA	7.0	44	2335	30.6	9.8	11	BSW
265/65R17	112	H	560AA	8.0	44	2470	30.6	10.7	11	BSW
265/70R17	115	H	560AA	8.0	44	2680	31.7	10.7	11	BSW
235/55R18XL	104	V	560AA	7.5	50	1985	28.1	10.0	11	BSW
255/55R18XL	109	V	560AA	8.0	50	2270	29.0	10.0	11	BSW
265/60R18	110	H	560AA	8.0	44	2335	30.5	10.7	11	BSW
265/50R20 XL	112	V	560AA	8.5	50	2470	30.5	10.9	11	BSW
275/55R20 XL	117	V	560AA	8.5	50	2835	31.9	11.2	11	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 55,000 MI



- Enhanced Wet Handling
- Quiet Kat Technology
- Advanced Rubber Compound Resist Cuts and Punctures
- All-Season Tread Pattern with Closed Shoulder for Better Handling

Features



EL JEFE HT²

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
LT235/75R15	8	D	116/113	Q	6.5	65	(S)2335 (D)2150	28.8	9.4	13	BSW
LT215/85R16	10	E	115/112	Q	6.0	80	(S)2680 (D)2470	30.3	8.6	13	BSW
LT225/75R16	10	E	115/112	Q	6.0	80	(S)2680 (D)2470	29.3	8.9	13	BSW
LT235/85R16	10	E	120/116	Q	6.5	80	(S)3042 (D)2778	31.6	9.3	13	BSW
LT245/75R16	10	E	120/116	Q	7.0	80	(S)3042 (D)2778	30.5	9.8	13	BSW
LT265/75R16	10	E	123/120	Q	7.5	80	(S)3415 (D)3085	31.7	10.7	13	BSW
LT285/75R16	10	E	126/123	Q	8.0	80	(S)3305 (D)2836	32.8	11.5	13	BSW
LT235/80R17	10	E	120/117	Q	6.5	80	(S)3085 (D)2835	31.8	9.4	13	BSW
LT265/70R17	10	E	121/118	Q	8.0	80	(S)3195 (D)2910	31.6	10.6	13	BSW
LT285/70R17	10	E	121/118	Q	8.5	80	(S)3195 (D)2910	32.7	11.5	13	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 55,000 MI



*Colored letters are for illustration only



- Durable All-Terrain Design
- Chip Resistant Compound
- Reinforced Bead Guard Protects Wheel
- Quiet Kat Technology
- Superior Kat Control in both Wet and Dry Conditions

Features



EL TIGRE AT

Size	Ply Rating	Load Range	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
235/75R15	STD	-	105	T	540 A B	6.5	44	2040	29	9.3	12	BSW
235/70R16	STD	-	106	T	540 A B	7.0	44	2095	29	9.4	12	BSW
245/70R16	XL	-	111	T	540 A B	7.0	44	2095	29	9.4	12	BSW
245/75R16	STD	-	111	T	540 A B	7.0	44	2405	30	9.8	12	BSW
255/70R16	STD	-	111	T	540 A B	7.5	44	2405	30	10.2	12	BSW
265/70R16	STD	-	112	T	540 A B	8.0	44	2470	31	10.7	12	BSW
245/65R17	STD	-	107	T	540 A B	7.0	44	2150	30	9.8	12	BSW
265/65R17	STD	-	112	T	540 A B	8.0	44	2470	31	10.7	12	BSW
265/70R17	STD	-	115	T	540 A B	8.0	44	2680	32	10.7	12	BSW
265/60R18	STD	-	110	T	540 A B	8.0	44	2335	31	10.7	12	BSW
265/70R18	STD	-	116	T	540 A B	8.0	44	2755	33	10.7	12	BSW
275/65R18	STD	-	116	T	540 A B	8.0	44	2755	32	11.0	12	BSW
275/55R20	XL	-	117	T	540 A B	8.5	50	2835	32	11.2	12	BSW
275/60R20	STD	-	115	T	540 A B	8.0	44	2680	33	11.0	12	BSW
285/55R20	STD	-	115	T	540 A B	9.0	44	2680	32	11.7	12	BSW
LT235/75R15	6	C	104/101	S	-	6.5	50	(S)1985 (D)1820	29	9.3	14	BSW
LT215/85R16	10	E	115/112	S	-	6.0	80	(S)2680 (D)2470	30	8.5	14	BSW
LT225/75R16	10	E	115/112	S	-	6.0	80	(S)2680 (D)2470	29	8.8	14	BSW
LT235/85R16	10	E	120/116	S	-	6.5	80	(S)3042 (D)2778	32	9.3	15	BSW
LT245/75R16	10	E	120/116	S	-	7.0	80	(S)3042 (D)2778	30	9.8	15	BSW
LT265/75R16	10	E	123/120	S	-	7.5	80	(S)3415 (D)3085	32	10.5	15	BSW
LT285/75R16	10	E	126/123	S	-	8.0	80	(S)3750 (D)3145	33	11.3	15	BSW
LT235/80R17	10	E	120/117	S	-	6.5	80	(S)3085 (D)2835	32	9.3	15	BSW
LT245/75R17	10	E	121/118	S	-	7.0	80	(S)3195 (D)2910	31	9.8	15	BSW
LT265/70R17	10	E	121/118	S	-	8.0	80	(S)3195 (D)2910	32	10.7	15	BSW
LT285/70R17	10	E	121/118	S	-	8.5	80	(S)3195 (D)2910	33	11.5	15	BSW
31X10.50R15LT	6	C	109	S	-	8.5	50	2270	31	10.6	15	BSW
35X12.50R17LT	10	E	121	S	-	10.0	65	3195	35	12.5	15	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 55,000 MI



- Extreme All-Terrain Design / Mud Rated
- Two Unique Sidewalls / Raised Black Letters vs Indented Black Letters
- Directed Super Silica for Better Wet Traction, Low Rolling Resistance and Longer Tread Life
- Quiet Kat Technology
- Patented Bead Claw Delivers More Traction Surface & Protects Wheel

Features



GRIPIT XT (All Terrain)

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall Construction (PR)	Sidewall
265/70R17	STD	-	115	H	8.0	44	2679	31.7	10.7	13	2P	BSW
285/70R17	STD	-	116	H	8.5	44	2756	32.8	11.5	13	2P	BSW
275/55R20	XL	-	117	H	8.5	50	2833	31.9	11.2	13	2P	BSW
275/60R20	XL	-	116	H	8.0	50	2756	33.0	11.0	13	2P	BSW
285/45R22	XL	-	114	H	9.5	50	2601	32.1	11.2	13	2P	BSW
LT265/70R17	10	E	123/120	S	8.0	80	(S)3415 (D)3085	31.7	10.7	15	3P	BSW
LT285/70R17	10	E	126/123	S	8.5	80	(S)3750 (D)3415	32.8	11.5	15	3P	BSW
LT275/70R18	10	E	125/122	S	8.0	80	(S)3640 (D)3305	33.2	11.0	15	3P	BSW
LT275/55R20	10	E	120/117	S	8.5	80	(S)3085 (D)2835	31.9	11.2	15	3P	BSW
LT275/60R20	10	E	123/120	S	8.0	80	(S)3415 (D)3085	33.0	11.0	15	3P	BSW
33X12.50R20LT	12	F	119	R	10.0	80	3000	32.5	12.5	15	3P	BSW
35X12.50R20LT	12	F	125	R	10.0	80	3640	34.5	12.5	15	3P	BSW
33X12.50R22LT	12	F	114	R	10.0	80	2600	32.5	12.5	15	3P	BSW
35X12.50R22LT	12	F	121	R	10.0	80	3195	34.5	12.5	15	3P	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 50,000 MI



- Mud Rated to Deliver Extreme Performance
- Quiet Kat Technology
- Patented Bead Claw Delivers More Traction Surface & Protects Wheel
- Two Unique Sidewalls / Raised Black Letters vs Indented Black Letters
- Directed Super Silica for Better Wet Traction, Low Rolling Resistance and Longer Tread Life

Features



MUD KICKER

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall Construction (PR)	Sidewall
LT265/75R16	10	E	123/120	Q	7.5	80	(S)3415 (D)3085	31.9	10.5	19	2P	BSW
LT255/75R17	6	C	111/108	S	7.0	50	(S)2405 (D)2205	32.3	10.0	18	2P	BSW
LT265/70R17	10	E	121/118	Q	8.0	80	(S)3195 (D)2910	31.9	10.7	19	2P	BSW
LT305/55R20	12	F	125/122	Q	9.5	65	(S)3195 (D)2910	33.5	12.4	21	3P	BSW
35X12.50R17LT	10	E	121	Q	10.0	65	3195	34.8	12.5	21	3P	BSW
33X12.50R18LT	12	F	122	Q	10.0	65	3305	32.8	12.5	21	3P	BSW
35X12.50R18LT	12	F	128	Q	10.0	65	3970	34.8	12.5	21	3P	BSW
33X12.50R20LT	12	F	119	Q	10.0	80	3000	32.8	12.5	21	3P	BSW
35X12.50R20LT	12	F	125	Q	10.0	80	3640	34.8	12.5	21	3P	BSW
37X13.50R20LT	12	F	128	Q	11.0	80	3970	36.8	13.6	21	3P	BSW
33X12.50R22LT	12	F	114	Q	10.0	80	2600	32.8	12.5	21	3P	BSW
35X12.50R22LT	12	F	121	Q	10.0	80	3195	34.8	12.5	21	3P	BSW



INCLUDES
INDUSTRY LEADING
ROAD-HAZARD WARRANTY



ENHANCED MILEAGE
WARRANTY: 50,000 MI

LIGHT TRUCK



- Quiet Kat Technology
- High Modulus Low Shrinkage Carcass Enhances Driving Comfort
- M+S All Season Tread Pattern

Features



KAT ENERGY

Size	Load Index	Speed Rating	UTQG	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Sidewall
235/75R15	105	S	500AB	6.5	44	2039	28.7	10	11	BSW



INCLUDES INDUSTRY LEADING ROAD-HAZARD WARRANTY



ENHANCED MILEAGE WARRANTY: 45,000 MI



- 5 Rib Tread and Wide Shoulder Deliver Stability
- Compound Provides Low Heat Generation Increasing Durability
- 4 Wide Straight Grooves for Efficient Water Evacuation and Braking Performance in Wet and Dry Conditions
- Strengthened Casing for More Retreads

Features



CT516+

Size	Ply Rating	Load/Speed Index	Type	Max Load (Kg/lbs)	Max Pressure (psi)	Meas. Rim Width (inch)	Overall Diameter (inch)	Section Width (inch)	Tread Depth (32nds)
7.50R16LT	14	122/121L	TL	(S) 1500/3330 (D) 1450/3195	100	6.00	31.8	8.7	16





- Optimized Footprint for Great Wear & Handling
- Strong Shoulder Blocks Enhance Handling
- Sipes Improve Grip in Hazardous Weather
- Circumferential Grooves Reduce Hydroplaning

Features



EL JEFE VAN

Size	Road Hazard	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
235/65R16C	10	E	121/119	R	7.0	83	(S)3200 (D)3000	28.0	10	14	BSW



- Four Flat, Wide Ribs, Increase Contact Area and Provide Enhanced Handling
- Strengthened Shoulder Delivers Better Handling and Shock Absorption
- Rim Guard Protects Wheel Against Damage

Features



EL JEFE VAN II

Size	Road Hazard	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
165R13C	8	D	94/92	R	4.5	65	(S)1480 (D)1390	23.5	7	10	BSW
185R14C	8	D	102/100	R	5.5	65	(S)1874 (D)1764	25.6	7	11	BSW
195R14C	8	D	106/104	R	5.5	65	(S)2094 (D)1984	26.2	8	11	BSW
195R15C	8	D	106/104	R	5.5	65	(S)2094 (D)1984	27.2	8	11	BSW
205R16C	8	D	110/108	R	6.0	65	(S)2335 (D)2205	29.0	8	11	BSW





- Tread Compound Enhances Braking Performance
- Deep Center Channels Reduce Hydroplaning
- Large Shoulder Blocks Improve Steering
- Wide Footprint Reduces Wear

Features



EL JEFE VAN III

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
185/60R15C	6	C	94/92	T	5.5	54	(S)1480 (D)1390	23.7	7.8	12	BSW
195/70R15C	8	D	104/102	R	6.0	65	(S)1985 (D)1875	25.8	7.9	12	BSW
215/70R15C	8	D	109/107	R	6.5	65	(S)2270 (D)2150	26.9	8.7	12	BSW
225/70R15C	8	D	112/110	R	6.5	65	(S)2470 (D)2335	27.4	9.0	12	BSW
195/75R16C	8	D	107/105	R	5.5	69	(S)2150 (D)2040	27.5	8.0	12	BSW
205/65R16C	8	D	107/105	R	6.0	69	(S)2150 (D)2040	26.5	8.2	12	BSW
215/65R16C	8	D	109/107	R	6.5	69	(S)2270 (D)2150	27.0	9.1	12	BSW
225/75R16C	10	E	121/120	R	6.0	69	(S)3195 (D)3085	29.3	8.8	12	BSW
235/65R16C	10	E	121/119	R	7.0	69	(S)3195 (D)3085	28.0	9.4	12	BSW



- Symmetrical Tread Design Provides Smoothwear
- Tread Pattern Enhances Grip in the Rain
- Wide Footprint for Responsive Steering


Features



EL JEFE VAN V

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity Single/Dual (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Sidewall
155R12C	8	D	88/86	R	4.5	65	(S)1235 (D)1170	21.7	6	10	BSW



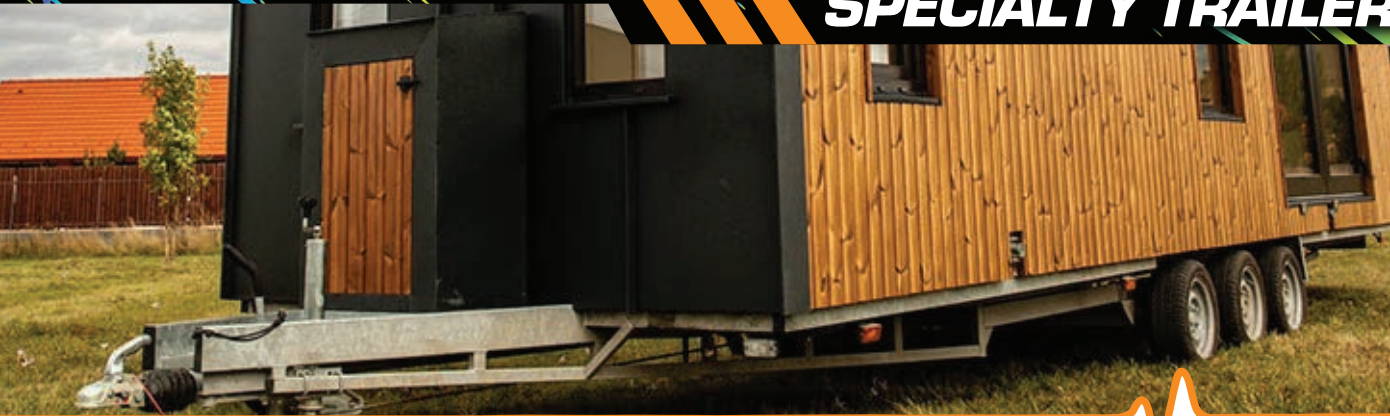

- Deep Tread for Longer Mileage
- Rib Pattern Provides Low Rolling Resistance
- Solid Center Rib Provides Improved Stability and Traction

Features



STRAY KAT

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Tread/Sidewall Construction	Sidewall
ST175/80R13	6	C	91/87	M	5.0	50	(S)1360 (D)1200	24.0	7.0	9	1P+2S+1N/1N	BSW
ST205/75R14	8	D	105/101	M	5.5	64	(S)2040 (D)1820	26.1	8.0	9	2P+2S+1N/2N	BSW
ST215/75R14	8	D	108/103	M	6.0	65	(S)2200 (D)1930	26.7	8.5	9	2P+2S+1N/2N	BSW
ST205/75R15	10	E	111/106	M	5.5	80	(S)2400 (D)2095	27.1	8.0	9	2P+2S+1N/2P	BSW
ST225/75R15	10	E	117/112	M	6.0	80	(S)2830 (D)2470	28.3	8.8	9	2P+2S+1N/2N	BSW
ST235/80R16	12	F	127/122	M	6.5	95	(S)3860 (D)3300	30.8	9.3	9	2P+2S+3N/2P	BSW



- All Steel Construction
- Four Center Grooves and Slant-Edge Pattern Provides Outstanding Drainage and Grip
- Wider Tread Improves Abrasion Resistance and Increases Mileage

Features



STRAY KAT II

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Tread/Sidewall Construction	Sidewall
ST235/80R16	16	H	130/126	L	6.5	115	(S)4190 (D)3750	30.8	9.3	12	3S/1S	BSW



SPECIALTY TRAILER



- All Steel Construction
- Tread Compound Provides Enhanced Wear Resistance
- Broader Tread Design Delivers Stability and Safety
- Bead Design and Fortified Carcass Increase Loading Capacity

Features



STRAY KAT III

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Tread/Sidewall Construction	Sidewall
ST225/75R15	14	G	124/121	M	6.0	110	(S)3520 (D)3195	28.3	8.8	7	3S/1S	BSW



- All Steel Construction
- Tread Compound Provides Enhanced Wear Resistance
- Broader Tread Design Delivers Stability and Safety
- Bead Design and Fortified Carcass Increase Loading Capacity

Features



STRAY KAT IV

Size	Ply Rating	Load Range	Load Index	Speed Rating	Rim Width (in)	Max Pressure (psi)	Max Load Capacity (lb)	Overall Diameter (in)	Section Width (in)	Tread Depth (32nd)	Tread/Sidewall Construction	Sidewall
ST235/85R16	16	H	133/128	L	6.5	120	(S)4540 (D)3970	31.73	9.3	12	3S/1S	BSW



PCR & LT LIMITED WARRANTY

This Limited Warranty is made by Cosmo Tires and applies to all Cosmo passenger and light truck tires. The original purchaser is entitled to the benefits of this limited warranty unless a warranty exclusion applies or the purchaser has failed to comply with this Limited Warranty's use, maintenance, or tire rotation requirements.

ELIGIBILITY FOR LIMITED WARRANTY COVERAGE

You must be the original purchaser of a warranted tire and the tire must have been continuously installed on the vehicle on which it was first installed. Your sales receipt is your proof of purchase. This limited tire warranty is not transferable to another vehicle or to another person. This warranty does not cover tires installed on a commercial vehicle or a vehicle put in commercial use.

LIMITED WARRANTY AGAINST DEFECTS IN WORKMANSHIP AND MATERIALS

All Cosmo Tires lines are warranted against failures due to defects in workmanship and materials for the life of the original tread, or five years from the date of purchase (whichever comes first).

If a Cosmo tire fails due to a defect in workmanship or materials, you will be entitled to a prorated allowance applicable to the purchase price of a comparable new Cosmo tire. This replacement tire allowance will be prorated and calculated by dividing the number of 32nds of useable tread remaining when the tire is presented for warranty replacement (rounding to the nearest 32nd of an inch) by the total number of 32nds of an inch of useable tread.

You will be responsible for all shipping charges, mounting, balancing, disposal fees, if applicable, and taxes for the warranty replacement tire when the tire fails due to defects in material or workmanship. Once the usable tread of a Cosmo tire has been exhausted, this warranty for defects in material and workmanship has also been exhausted and the benefits of the limited warranty terminate.

WARRANTY EXCLUSIONS AND LIMITATIONS

The exclusions and limitations on the applicability of this warranty set forth in this section and other sections should be read carefully to determine whether you are entitled to a warranty replacement or a warranty replacement allowance. The limited warranties for the Cosmo tire you purchased do not apply if one of the following conditions applies or the tire failed because:

- Tires installed on a vehicle registered or normally used outside the United States and Canada
- The tire was installed on a commercial or commercial use vehicle (e.g., limousine)
- The tire was transferred to another vehicle after it was originally installed
- Tires installed on a vehicle with a malfunctioning odometer
- The tire is branded as "Blemish" or "NA" or the molded DOT number has been removed or disfigured
- If the tire has been repaired i.e. patch, plug, shaved, etc
- Road Hazard, potholes, or collision damage, improper mounting or balancing, vandalism, theft, racing (on or off-road), long-term improper storage or other abuse
- Over and under inflation, overloading or failure to maintain proper tire pressure
- Addition of liquids, solids or gases (other than air, nitrogen, carbon dioxide)
- Ozone or weather cracks or cracking occurring two (2) years after the date of purchase or, if that proof is not available, two (2) years after the DOT serial date
- Vehicle mechanical failures, improper alignment, brake and shock failure or improperly aligned tires causing "irregular treadwear" (i.e. tread groove depth difference of 2/32nds of an inch or more on the same tire)
- The wheel on which the tire is mounted is defective or fails
- Alteration of tread design to improve traction (e.g., siping) or grinding to improve uniformity, or sidewall inlays

To the extent permitted by the laws of your state, this Limited Warranty does not cover and expressly excludes any coverage for personal injury, property damage, loss of time, inconvenience, loss of use of your vehicle or tire, or any other incidental or consequential damages. No express warranty is given other than those expressly stated in this Limited Warranty booklet. Any implied warranty of merchantability, fitness for a particular purpose or otherwise, is limited in duration and expires when the tire's usable tread is exhausted as specified in this Limited Warranty. No implied warranty of merchantability, fitness for a particular purpose or otherwise, is given on tires used on commercial vehicles or for commercial use vehicles.



OWNER OBLIGATIONS

It is your obligation to present the tire for which you are seeking a warranty replacement or a replacement allowance to a Cosmo Tires dealer. Until a tire is accepted by the dealer for warranty replacement or allowance, the tire remains the responsibility of the purchaser. Once the tire is accepted by the dealer for Limited Warranty replacement or allowance, you agree to relinquish all ownership and all rights to the tire.

You should retain the purchase receipt because no warranty claim will be accepted by your Cosmo dealer unless you retain and present the following to the dealer when you seek the benefits of this limited warranty:

- Proof of your purchase of the Cosmo Tires presented
- Proof of the date of your purchase (if none is presented the date of manufacture will be used for the purposes of this Limited Warranty)
- Proof as to the vehicle on which this tire was mounted and mileage on date of purchase
- Proof that the tire was properly rotated at the required intervals

LEGAL RIGHTS

This Limited Warranty gives you legal rights, and you may have additional legal rights under applicable federal statutes and regulations or state law. Your legal rights under state law may vary state to state.

IMPORTANT SAFETY WARNINGS AND INFORMATION

Cosmo Tire owners should follow these safety tips to possibly avoid serious accident and injury:

- Tire under inflation, over inflation or overloading can cause tire failure (you must adhere to directions in the manufacturer's owner's manual or tire placard on the vehicle for proper tire pressures for the front and rear tires)
- Be sure that the tire valve caps are all present and securely attached, the valve cap is one of the primary seals against air leaks
- Tires should only be mounted by specially trained dealer personnel
- Match the tire's diameter with the wheel rim's bead seat diameter
- Inflation pressure should be checked, using an accurate tire gauge. At least once a month, check pressure when the tire is cool; never bleed hot tires as it may lead to under inflation after cooling; never allow children to check, inflate or deflate tires
- Before towing a trailer, check with your dealer to determine proper tire sizing and pressures that may be required because of the trailer load
- Check tires frequently for cuts, bulges, abnormal or uneven wear, abrasions, glass or metal debris and impact damage
- Repairs to tires must always consist of a patch applied to the inside of the tire when the tire is removed from the wheel; plug repairs are improper and are prone to leaks and sudden failures and will void all warranties
- Avoid road hazards, debris, curbs and potholes which can damage your tires, wheels and alignment
- Never over inflate your tire and never exceed the maximum pressure and load molded on the tire sidewall and only inflate tire to maximum pressure when your tires are carrying the maximum load
- Have tire punctures repaired by trained personnel only
- If your vehicle is stuck in snow, mud, sand or is impeded by a physical obstruction, such as a ditch, avoid excessive tire spinning; never exceed 35 miles an hour on the odometer when spinning a tire as the centrifugal force generated above that speed could result in tire deformation or explosion, instead, use gentle forward and backward motion to free the vehicle
- Best tire performance is achieved when all tires are of the same type and size that is recommended by the vehicle manufacturer for the particular axle
- Never mount radial ply tires on the same axle as non-radial ply tires; never mount radial tires on the front axle when non-radial tires are mounted on the rear axle as these conditions can create vehicle instability resulting in sudden loss of control, damage and injury
- It is recommended that all four (4) tires on a passenger or light truck vehicle be replaced at the same time. However, when only two (2) tires are replaced, the new tires should be installed on the rear axle to achieve better driving performance and safety
- Never drive on tires that have less than 2/32nds of an inch of tread remaining; replace tires as soon as the tread reaches the tread wear indicators molded into the tread grooves of the tire which reveal when the tread depth remaining is 2/32nds of an inch, continued use creates a serious risk of the tire failure, loss of control and possibly serious injury
- Never operate your vehicle at speeds above the legal limit or speeds that are not justified by the road conditions

COSMO PCR & LT MILEAGE WARRANTY

The following Tread Wear Warranty is a prorated warranty (there is no free replacement period) based on mileage received and is separate from the Limited Warranty.

No manufacturer or dealer can guarantee you a certain number of miles from a given tire. Driving habits, driving conditions, tire and vehicle maintenance all play a part in the tread life of a tire and all differ with each consumer. The following radial tires are warranted against tread wear out prior to the applicable indicated mileage:

MODEL	MILEAGE WARRANTY	MODEL	MILEAGE WARRANTY
KURRENT	70,000 *	REAL CAT 17	45,000
MUCHO MACHO	30,000	TIGER TAIL	40,000
EL JEFE HT/HT2	55,000	EL TIGRE AT	55,000
GRIPIT XT	50,000	MUD KICKER	50,000
KAT ENERGY	45,000		

*The Mileage Warranty for KURRENT Tires Mounted on Electric Vehicles is 40,000 Miles

The Tread Wear warranty is available provided that you:

1. Are the original purchaser of the tires and you still own the vehicle on which they were originally installed.
2. Only used the tires on that original vehicle.
3. Register tires 45 days from purchase date. Visit cosmotires.com/warranty to register today.
4. Rotate your tires every 6,000 miles and it must be documented.
5. Present the tire for adjustment.
6. Present the following information when requesting an adjustment: original purchase receipt, date of purchase, vehicle type, model, odometer reading and rotation record properly recorded/documentated.

If the tire wears to the tread wear indicators in less than the miles warranted, a pro-rated adjustment will be made according to actual mileage delivered. Your replacement cost will be determined by dividing the actual mileage delivered by the miles warranted and multiplying the result times the current selling price of an equivalent or comparable replacement Cosmo tire. You will be responsible for shipping charges, taxes, mounting, balancing and any other miscellaneous fees of the replacement unit being provided.

The mileage warranty on tires will be half that specified for tires that cannot be rotated to different axles, because the tire size on the front axle of the vehicle is different from that on the rear axle (Staggard Fitments).

IMPORTANT SAFETY WARNINGS AND INFORMATION

Cosmo Tire owners should follow these safety tips to possibly avoid serious accident and injury:

- Tire under inflation, over inflation or overloading can cause tire failure (you must adhere to directions in the manufacturer's owner's manual or tire placard on the vehicle for proper tire pressures for the front and rear tires)
- Be sure that the tire valve caps are all present and securely attached, the valve cap is one of the primary seals against air leaks
- Tires should only be mounted by specially trained dealer personnel
- Match the tire's diameter with the wheel rim's bead seat diameter
- Inflation pressure should be checked, using an accurate tire gauge. At least once a month, check pressure when the tire is cool; never bleed hot tires as it may lead to under inflation after cooling; never allow children to check, inflate or deflate tires
- Before towing a trailer, check with your dealer to determine proper tire sizing and pressures that may be required because of the trailer load
- Check tires frequently for cuts, bulges, abnormal or uneven wear, abrasions, glass or metal debris and impact damage
- Repairs to tires must always consist of a patch applied to the inside of the tire when the tire is removed from the wheel; plug repairs are improper and are prone to leaks and sudden failures and will void all warranties
- Avoid road hazards, debris, curbs and potholes which can damage your tires, wheels and alignment
- Never over inflate your tire and never exceed the maximum pressure and load molded on the tire sidewall and only inflate tire to maximum pressure when your tires are carrying the maximum load
- Have tire punctures repaired by trained personnel only
- If your vehicle is stuck in snow, mud, sand or is impeded by a physical obstruction, such as a ditch, avoid excessive tire spinning; never exceed 35 miles an hour on the odometer when spinning a tire as the centrifugal force generated above that speed could result in tire deformation or explosion, instead, use gentle forward and backward motion to free the vehicle
- Best tire performance is achieved when all tires are of the same type and size that is recommended by the vehicle manufacturer for the particular axle
- Never mount radial ply tires on the same axle as non-radial ply tires: never mount radial tires on the front axle when non-radial tires are mounted on the rear axle as these conditions can create vehicle instability resulting in sudden loss of control, damage and injury
- It is recommended that all four (4) tires on a passenger or light truck vehicle be replaced at the same time. However, when only two (2) tires are replaced, the new tires should be installed on the rear axle to achieve better driving performance and safety
- Never drive on tires that have less than 2/32nds of an inch of tread remaining; replace tires as soon as the tread reaches the tread wear indicators molded into the tread grooves of the tire which reveal when the tread depth remaining is 2/32nds of an inch. Continued use creates a serious risk of the tire failure, loss of control and possibly serious injury
- Never operate your vehicle at speeds above the legal limit or speeds that are not justified by the road conditions
- Mileage warranty is not applicable on tires mounted on electric vehicles (EV's) *Exception is KURRENT model
- PCR mileage warranty is ONLY AVAILABLE in the United States and Canada



ROAD HAZARD WARRANTY

WHAT IS ROAD HAZARD DAMAGE?

Most tire manufacturers offer warranties on tires due to defects during the manufacturing process. At Cosmo Tires we take it a step further. Road Hazard damage occurs when a tire fails as a result of a puncture, bruise or impact break incurred during the course of normal driving conditions on a road maintained by federal, state and/or local authorities.

OUR ROAD HAZARD PROGRAM

The Road Hazard Warranty covers the first 25% of the tire's tread life or 1 year from date of purchase, whichever comes first. (Note: The 25% is based on the amount of 32nds remaining on the tire)

If a tire becomes unserviceable because of Road Hazard damage during the valid date period and/or the usable tread life of the tire falls within the first 25% of tread life, it will be replaced with a new tire. An exact make/model replacement tire will be provided, if available. In the event the exact make/model is not in stock or discontinued, a comparable quality tire will be provided. You will be responsible for any shipping charges, taxes, mounting, balancing and any other miscellaneous fees of the replacement unit being provided.

EXCLUSIONS AND LIMITATIONS

Road Hazard is available on all passenger and light truck Cosmo Tires except:

- Road Hazard Warranty is NOT AVAILABLE on any, Trailer (ST), Truck, Van, Commercial, Industrial, Farm, Lawn/Garden, or OTR.
- Road Hazard Warranty is ONLY AVAILABLE in the United States and Canada.
- Coverage excludes damage from off-road use, collision, fire, vandalism, theft, snow chains, abuse and neglect (i.e., improper application, improper inflation, overloading, brake lock up, wheel spinning, torque snags, etc.), cosmetic damage, sidewall abrasions or other appearance items that do not affect the safety or performance of the tire.
- Also excluded are damages or irregular wear caused by misalignment, mechanical failures or interference with vehicle components, collision damage, improper mounting or balancing, vandalism, theft, racing (on or off-road), long-term improper storage or other abuse.
- Tires that have been repaired via a plug or patch.
- This warranty covers only the tires registered to the customer listed during the initial registration.
- Consequential and/or incidental damages are excluded. Some states do not allow the exclusion or limitation of consequential and incidental damages; therefore, such limitations or exclusions may not apply to you.
- No expressed guarantees are given other than that stated here in. This warranty gives you specific legal rights; you may have other rights, which vary from state to state.



**VISIT [COSMOTIRES.COM/WARRANTY](https://www.cosmotires.com/warranty)
TO REGISTER YOUR TIRES TODAY!**

Tires must be registered 45 days from purchase date.






COSMO
MOTORSPORTS



SINCE 1995

KAT APPROVED

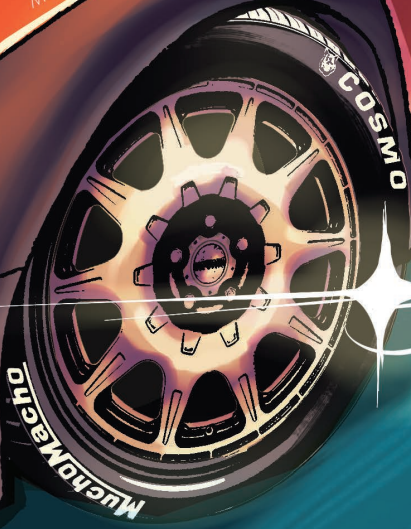

1224

