




Step by step instructions on how to install a Coverking dash cover

1. Unpack and check fit the Coverking cover, keep in mind the cover will not fit perfectly straight out of the box. You will just be checking for the proper cutouts for things like the defroster, airbag, headlight sensors etc.



2. Lay the Coverking dash cover out in the sun, this will help form to its intended shape from being folded and rolled into the shipping container. The longer you allow the product to sit out the easier the install.

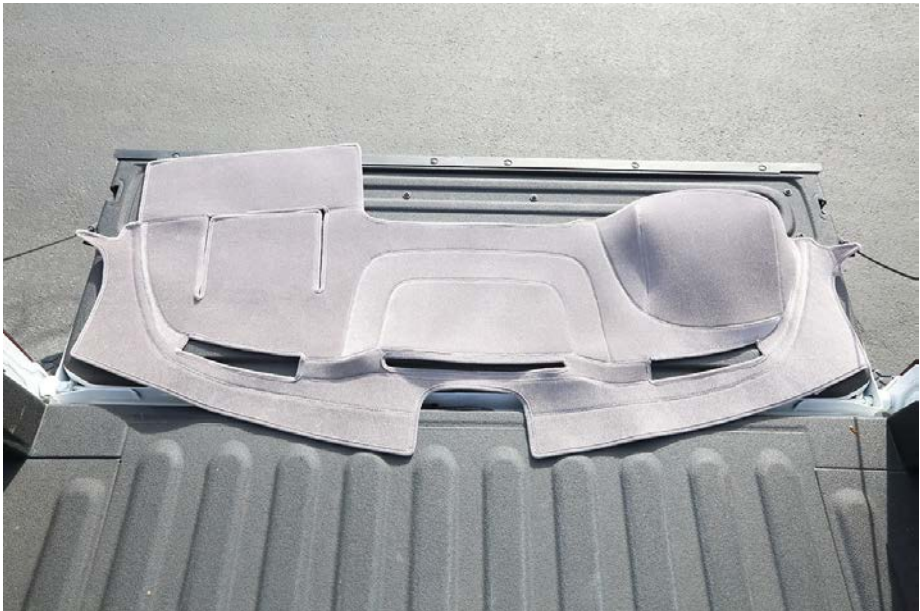

3. Included in you Coverking dash cover you will have the male ends of the hook and loop fastener, simply turn the cover over and stick them to the stitched in tabs. **DO NOT REMOVE THE PAPER BACKING AT THIS TIME.**



4. Position your Coverking cover in place, make sure to tuck the cover into the windshield channel.



5. Using the provided alcohol pad clean the areas underneath of the hook and loop fastener pads.



6. Peel off the paper backings one at a time and firmly press down to hold for a few seconds to hold them in place.



7. Once you Coverking cover is installed there is no other follow up maintenance to be done, if you need to clean your cover Coverking recommends a spot treatment with a mild detergent and warm water.



Alcohol wipes and dash prep

Alcohol pads are safe to use to clean and prep the dash before installing the hook and loop fastener attachment points but due to the age and dash conditions Coverking recommends testing the wipes in an inconspicuous part of the dash to ensure that the dashboard will not discolor from the alcohol. If you are unsure about using the wipe Coverking recommends cleaning the dash with a mild soap and water to remove the oils and dirt on the dash.



INSTALLATION & CARE


CUSTOM DASH COVER INSTALLATION

BEFORE INSTALLATION:

- Read entire installation instructions before proceeding
- Make sure dashboard is clean and dry
- Remember to give your dashboard time to conform. It will shape and fit perfectly after a few days.

1. Unroll Cover

Allow it to lie flat overnight if possible.

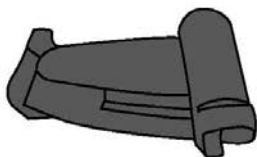

2. Clean Dashboard

Wipe off with a mild detergent to remove polish or wax from the areas where the fasteners will be placed.



3. Pre-fit Cover on Dash


Align contours and cuts. Make sure the defrost vents (nearest windshield) align with the cutouts.

TIP: On some vehicles, the material must be pushed forward between the dash and windshield. Use a wooden ruler or paint stick if necessary.

3IS056


4. Apply Fasteners

Remove cover from dash. Cut the fastener strip into 1-inch pieces and apply where needed. You may need a few fasteners near the windshield (on each side), several small pieces at the front edge and one or more in each contoured area. To remove fasteners, slowly peel to avoid damaging vinyl.

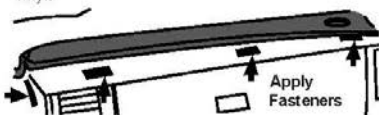


5. Pre-shape

Speed up the shaping process by bending or creasing the cover to help it conform to the curves of your dash.



6. Apply Dash Cover

Realign the cover with fasteners and set it into place for the final time.

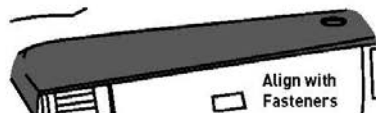


7. Custom Dash Cover Notices

AIRBAG

Your dashboard cover has been manufactured to allow for proper deployment of the airbag safety system. As designed, this product will not obstruct the airbag. You must not place any fasteners on this area, as doing so may obstruct deployment. Coverking assumes no responsibility for improper installation of dashboard covers, resulting in obstruction of airbag deployment.

FITMENT ISSUES

If your cover seems too big and hangs over the front of the dash, be sure the cover is pushed all the way back between the glass and front of the dash. The vent cutouts should match the defrost vents. If needed, use a wooden ruler or similar to push the cover back.

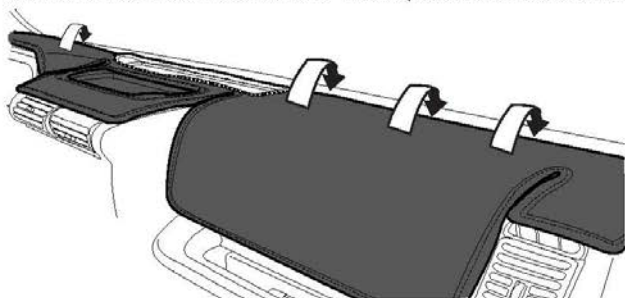

TIP: Because of auto assembly tolerances or variations in the position of replacement windshields, dash covers may require trimming on the windshield edge.

PLASTICIZER MIGRATION

This problem is common for certain car models. The plastic formulation inside the dashboard begins to break down, causing a darkened area to appear on the surface. This flaw may occur on both covered and uncovered dashboards. Coverking assumes no responsibility for such occurrences.