


11700 / 247424

HONDA ELEMENT LX & EX

10/1/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.
DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

| Parts List | | | |
|------------|-----|-------------------------------|---------------------------------|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | CM-438-FW | 7/16" FISHWIRE TOOL (NOT SHOWN) |
| 2 | 4 | 7/16-14 | LARGE HEX FLANGE NUT |
| 3 | 2 | 7/16-14 x 2 | CARRIAGE BOLT |
| 4 | 1 | 7_16 - 14 x 1.75" x 1.00" C-C | U-BOLT |
| 5 | 2 | CM-SP108 | 2.00 X 0.88 X .125 SPACER |

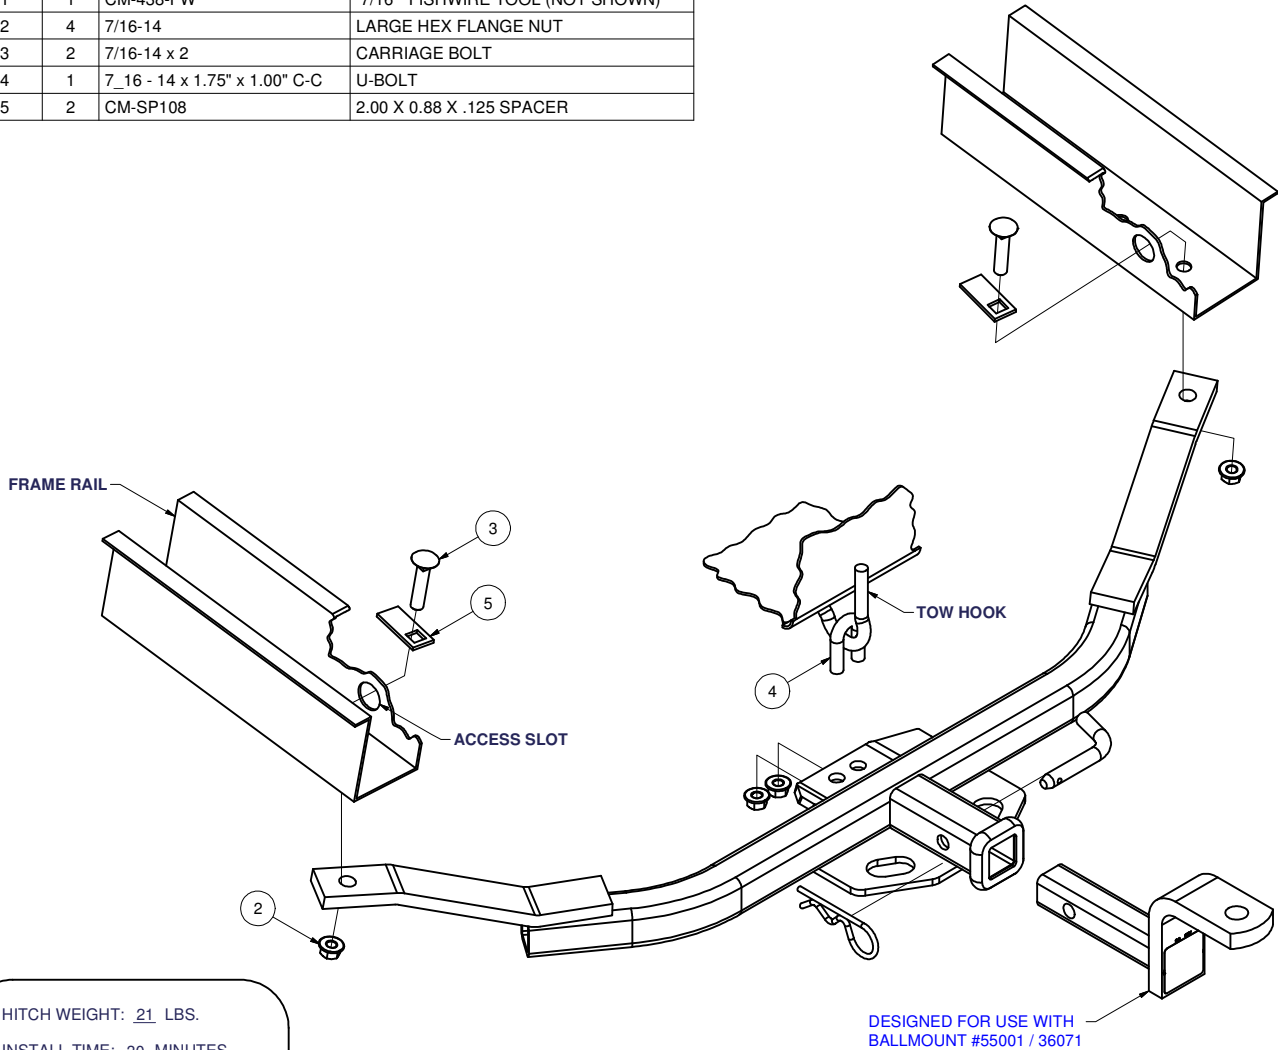

HITCH WEIGHT: 21 LBS.
INSTALL TIME: 30 MINUTES
INSTALL NOTES:
- NO DRILLING REQUIRED
- MAY NEED TO ENLARGE ACCESS HOLE

- INSTALLATION STEPS**
- 1) Fishwire 7/16" carriage bolts and spacers through access holes in each frame rail.
 - 2) Raise hitch into position aligning holes in hitch to previously fishwired bolts.
 - 3) Fasten hitch to frame rail using 7/16" flange nuts.
 - 4) Hang U-bolt from tow hook as shown and fasten to mounting plate on forward side of hitch using 7/16" flange nuts.
 - 5) Torque 7/16" carriage bolts to 70 lb.-ft. Torque 7/16" U-bolt to 70 lb.-ft.
- PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**