


16220

X5 5TH WHEEL ADAPTER PLATE

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 20,000 LBS. TRAILER WEIGHT & 4,000 LBS. TONGUE WEIGHT.
*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

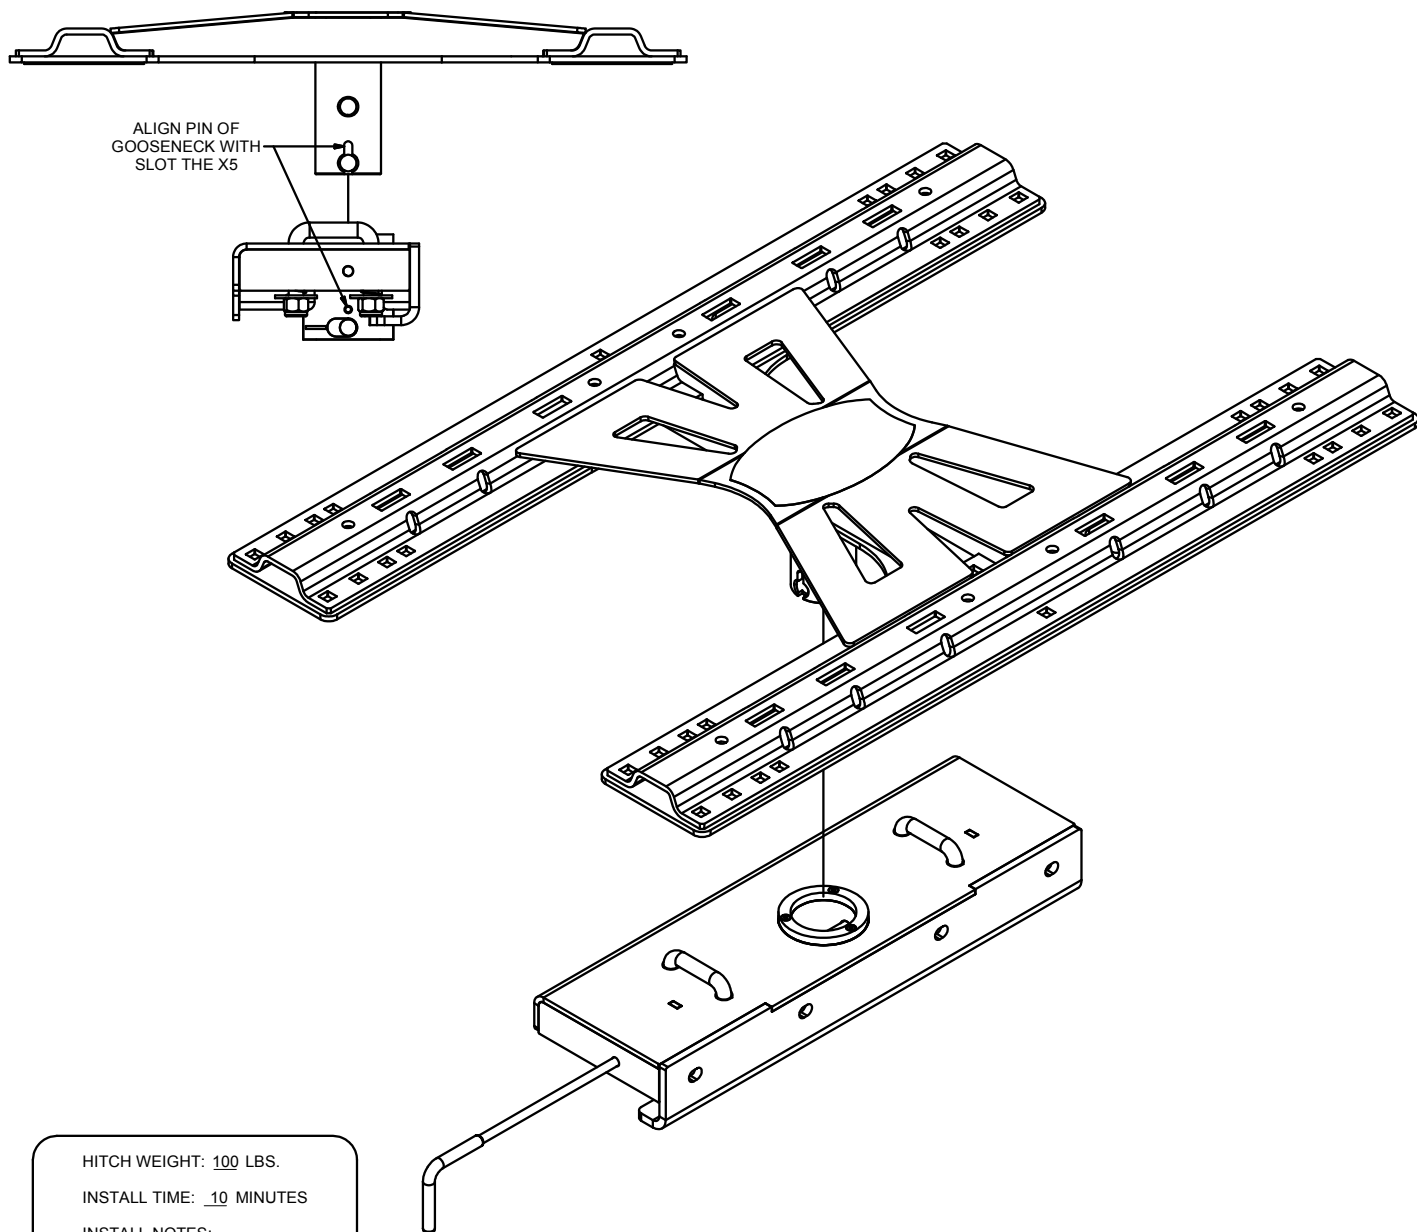

HITCH WEIGHT: 100 LBS.
INSTALL TIME: 10 MINUTES
INSTALL NOTES:
- NO DRILLING REQUIRED

INSTALLATION STEPS

NOTE: Bed liners and bed mats may affect fit of X5.

1. Remove existing ball from gooseneck, leaving the handle in the "unlocked" position. Return ball to vehicle owner for future gooseneck use.
2. Install X5 5th wheel adapter plate into gooseneck cylinder and rotate double lock handle to lock unit.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.