


11700 / 247424**HONDA ELEMENT LX & EX**

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.
 DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

| Parts List | | | |
|------------|-----|-------------------------------|---------------------------------|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 1 | CM-438-FW | 7/16" FISHWIRE TOOL (NOT SHOWN) |
| 2 | 4 | 7/16-14 | LARGE HEX FLANGE NUT |
| 3 | 2 | 7/16-14 x 2 | CARRIAGE BOLT |
| 4 | 1 | 7_16 - 14 x 1.75" x 1.00" C-C | U-BOLT |
| 5 | 2 | CM-SP108 | 2.00 X 0.88 X .125 SPACER |

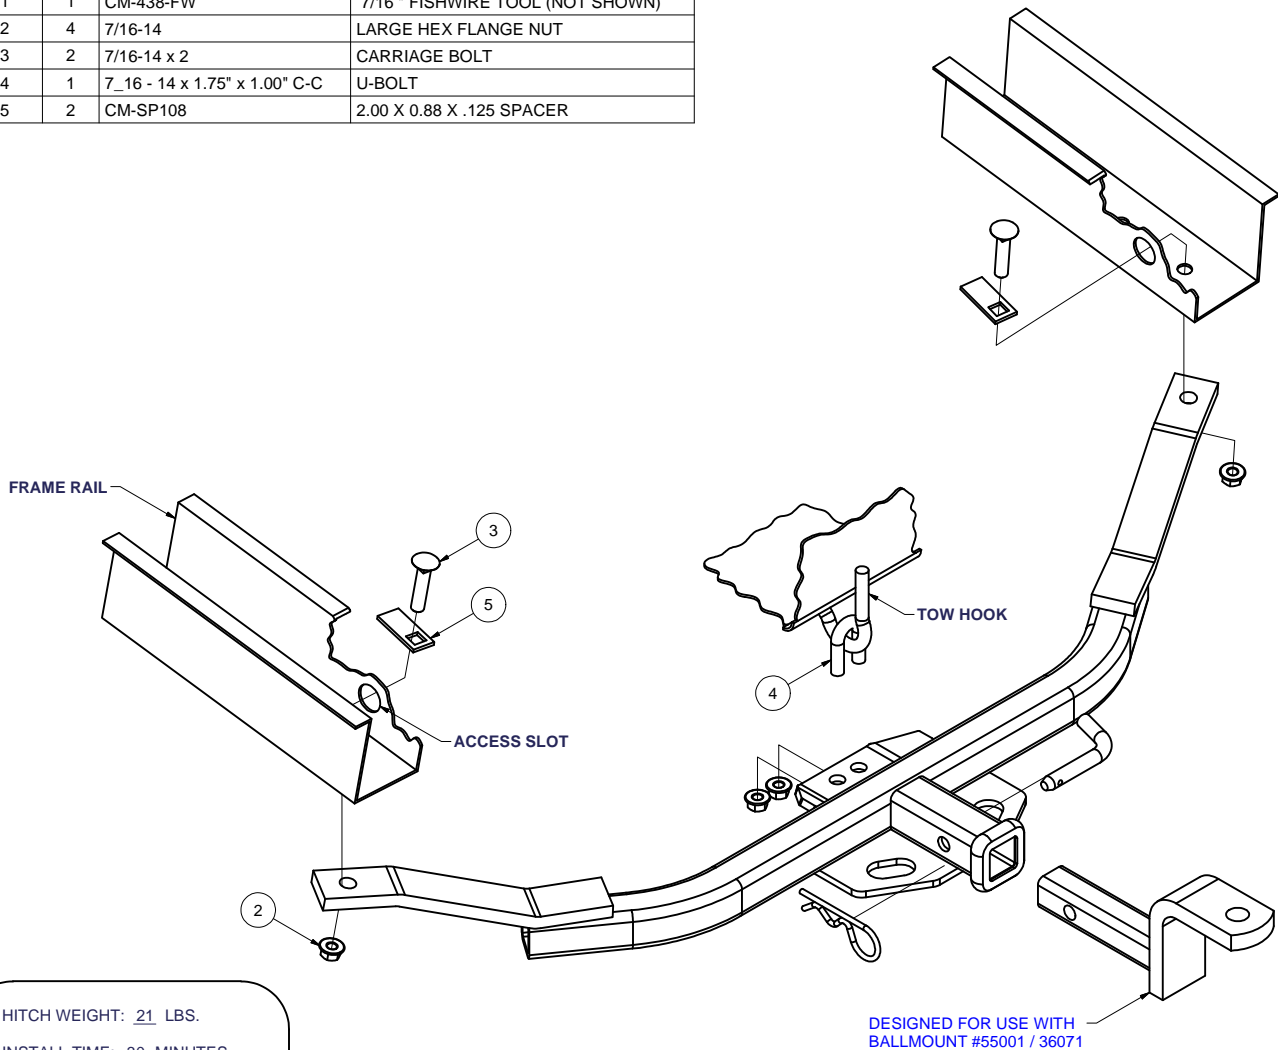

HITCH WEIGHT: 21 LBS.

INSTALL TIME: 30 MINUTES

INSTALL NOTES:

- NO DRILLING REQUIRED
- MAY NEED TO ENLARGE ACCESS HOLE

INSTALLATION STEPS

- 1) Fishwire 7/16" carriage bolts and spacers through access holes in each frame rail.
- 2) Raise hitch into position aligning holes in hitch to previously fishwired bolts.
- 3) Fasten hitch to frame rail using 7/16" flange nuts.
- 4) Hang U-bolt from tow hook as shown and fasten to mounting plate on forward side of hitch using 7/16" flange nuts.
- 5) Torque 7/16" carriage bolts to 50 lb.-ft. Torque 7/16" U-bolt to 35 lb.-ft.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.