

56079

TOYOTA AVALON
TOYOTA CAMRY
TOYOTA VENZA

WIRING LOCATION GUIDE



MUST READ FIRST!

All steps must be followed to ensure correct function of the T-Connector. To verify proper installation once installed, test by connecting a test light or properly wired trailer

1A. TOYOTA VENZA:

Open the vehicle's rear tailgate. Remove rubber mat, trunk floor panels, rear scuff panel and trays (A,B). Set aside all items removed being careful not to damage parts. On both sides of the vehicle, remove cargo loops, so that the trim panels can be carefully pulled away from the vehicle (C).

1B. TOYOTA AVALON AND CAMRY:



Open the trunk and remove the vehicle's floor coverings. Remove (2) plastic fasteners securing the rear scuff panel (D). (Push on the center of the fastener while pull pulling to remove it.) Pull up on the rear scuff panel being sure not to damage the alignment tabs.

2. ALL VEHICLES:

Starting on the driver's side pull back on the vehicles rear trim panel, locate the vehicle's taillight wiring harness the harness will have connectors similar to those on the T-connector (E). Separate these connectors, being careful not to break the locking tabs. Insert the T-connector end with the yellow wire in-between the separated connectors. Make sure that the connectors are fully inserted with locking tabs in place (F).

3. Route the T-Connector end with the green wire below the rear scuff panel to the passenger's side taillight housing. Repeat Step 2 using the T-Connector ends containing the green wire.

4. On driver's side, locate a flat surface in a out of the way place and mount the T-Connector's black converter box with the double sided tape provided.

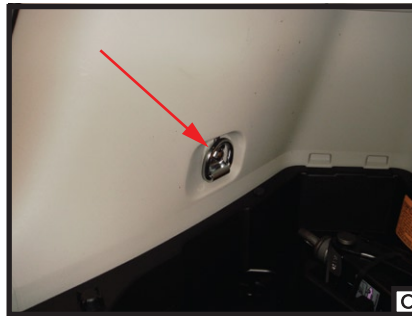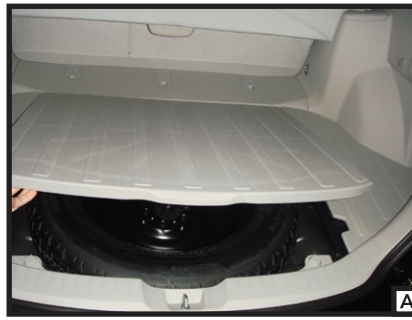

5. Locate a suitable grounding point near the connector such as the vehicle's frame or cross member. Drill a 3/32" hole and secure white wire using eyelet and screw provided.

6. Route the black power wire from the battery as shown on the CME-PCL-INS sheet included. Route the black wire through any rubber grommet in the trunk area if applicable to the black converter.

7. On the driver's side, locate the black power wire from the black converter box. Attach the black 12 ga. wire provided.

8. Reinstall the plastic trim panels, threshold, storage covers, floor covering and other items removed during installation, being careful not to pinch or cut the wires.

WARNING!

Verify miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage to vehicle and/or personal injury.



56079

Looking for dependable trailer hitches and towing? Rely on CURT for quality and long-lasting products.