PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

1. **LOCATION** (*See Diagram below*):
Run masking tape, **as shown using the measurements in the diagram below,** from POINT A to POINT B. Press tape against the vehicle, making sure that the tape is straight from POINT A to POINT B. **Repeat on other side of vehicle.**

Point A
↕ 3½"
MASKING TAPE LINE
Point B
4¼" ↕

Measure up from bottom of door. Be sure to take rear measurement before the curve of the door.
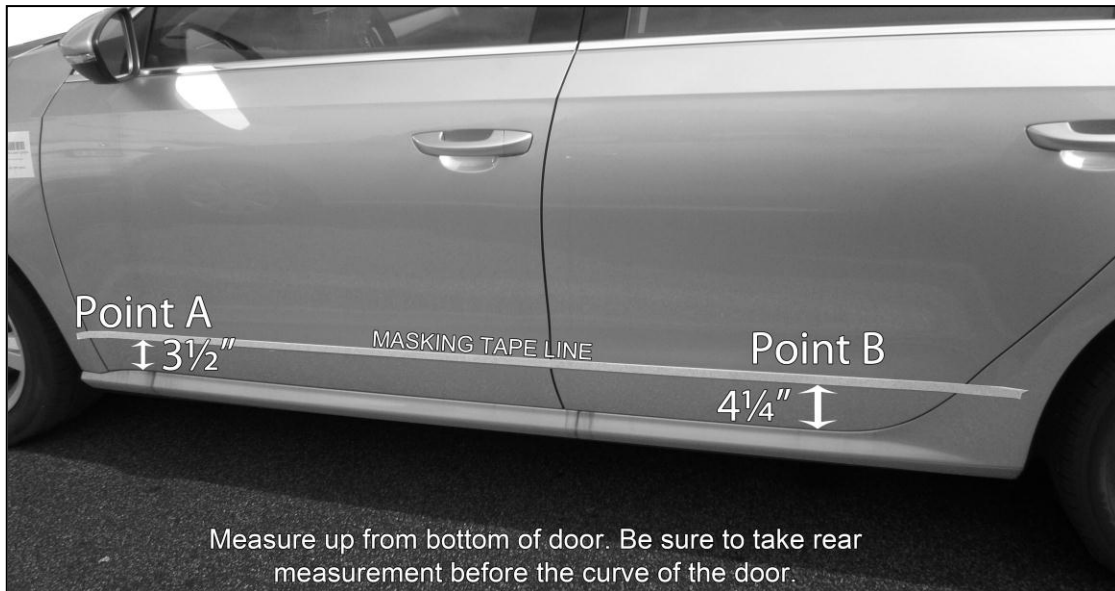
2. **CLEAN AND PREP**:
Clean the surface where the molding is to be installed using the alcohol pads enclosed for proper installation of Lower Chrome Molding. Wipe off excess residue with a clean cloth. Next, apply the **Pro Bond** promoter.
TEMPERATURE: Where cooler temperatures prevail, make sure the molding is at room temperature. The recommended metal surface temperature of the vehicle should be at least 75°F/24°C for proper installation. If the surface is cold, use a heat gun to warm before proceeding with installation.
PROMOTER: Supplied is a crush swab **Pro Bond** self-applicator. Squeeze the applicator until you feel the applicator "crush". When the applicator becomes wet on the end, it is ready for use. Quickly apply a thin coat of **Pro Bond** below the masking tape line, no further than 1 ¼" below the tape. Be careful not to go lower than 1¼" as **Pro Bond** could dull the paint surface. Wait for the coat of **Pro Bond** to dry before applying molding.
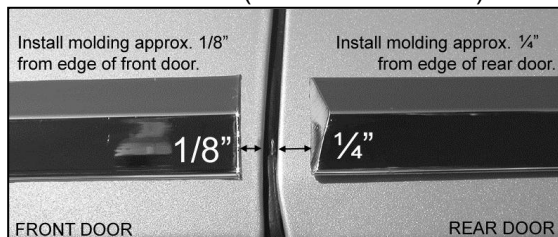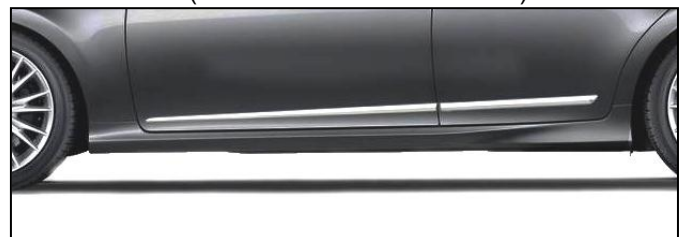
DIAGRAM B (STARTING POINT)

Install molding approx. 1/8" from edge of front door.
Install molding approx. ¼" from edge of rear door.
1/8"
¼"
FRONT DOOR
REAR DOOR

DIAGRAM C (FINISHED INSTALLATION)

3. **INSTALLATION (<u>IMPORTANT</u>)**:
Before starting, see Diagram B as to where to start applying molding. Next, completely peel off all of the liner from back of molding, making sure all red liner is removed from molding. **DO NOT TOUCH** the exposed adhesive with your fingers as the installation is being done.

4. See Diagram C for final installation.

5. <u>AFTER THE MOLDING</u> has been installed, use a soft cloth and apply pressure along the entire length of the molding to insure proper adhesion.

<u>View other chrome trim and accessories</u> made by <u>Dawn on our website.</u>