

9-654-1025

Audi/VW 1.8T DW65v Fuel Pump Installation Guide



Parts List:

- DW65v
- Reuseable Fuel Hose
- Hose Clamps (x2)
- O-rings (x3)
- Super Lube

DeatschWerks
Audi/VW 1.8T DW65v Fuel Pump Installation Guide

1.8T DW65v Fuel Pump Install


PLEASE READ – this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the fuel pump assembly from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.

Below is a picture of suggested tools that will make the installation process easier:



DeatschWerks
Audi/VW 1.8T DW65v Fuel Pump Installation Guide

1 – unplug the electrical connectors, both connectors have tabs that need to be pushed in as the connector is pulled up

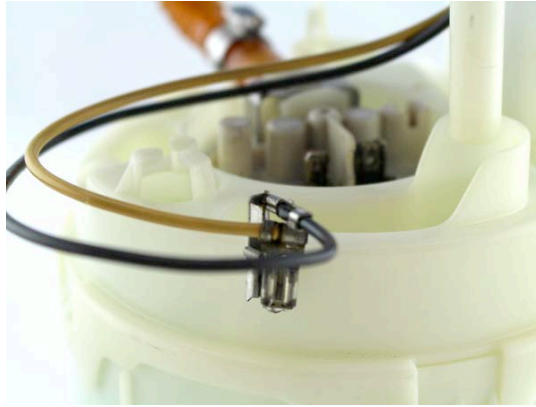

2 – remove the screws that attach the top of the assembly to the bucket, these screw can be either a 7mm hex or T20 torx



3 – pry the head of the clamp loose enough to pull the hose away from the pump and upper assembly; the hose may need to be cut for removal



DeatschWerks
Audi/VW 1.8T DW65v Fuel Pump Installation Guide

4 – removed the bucket cap by lifting up the 4 tabs around the top (circled in green), the pump will come out with the cap with a gentle pull





5 – install the 3 supplied o-rings on the DW65v, use a generous amount of Super Lube for smooth installation




DeatschWerks
Audi/VW 1.8T DW65v Fuel Pump Installation Guide

6 – install the DW65v into the assembly and replace the bucket cap, the small circle inside the bottom of the 65v needs to be aligned with the matching circle in the bucket (black and green arrows)

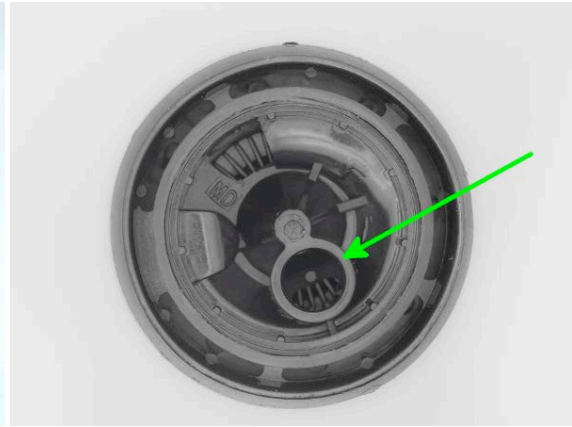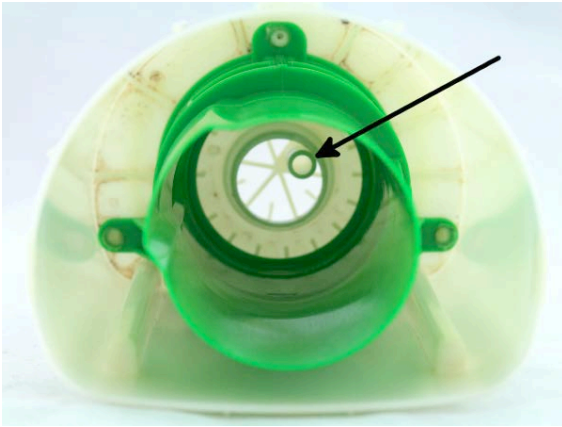

DeatschWerks
Audi/VW 1.8T DW65v Fuel Pump Installation Guide

7 – install the new fuel hose supplied on the 65v and then install to the top of the assembly

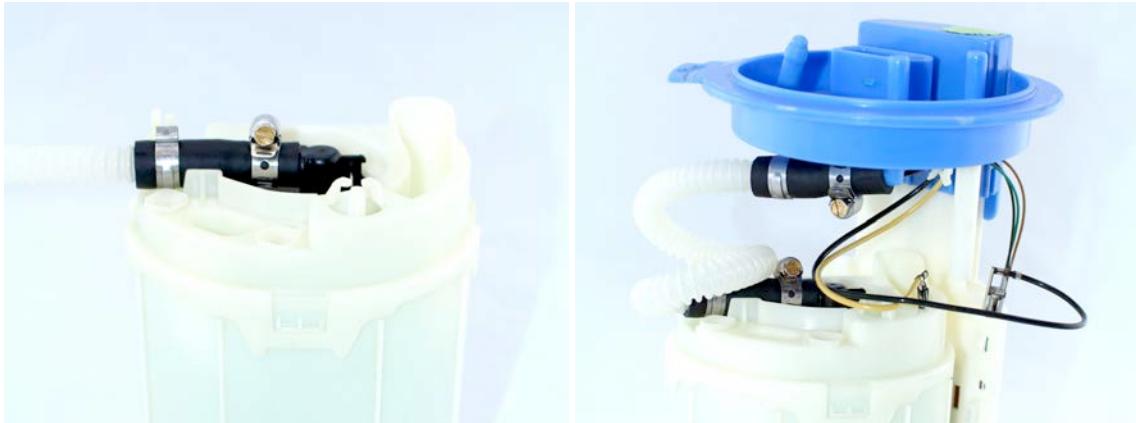

8 – reinstall the top and connect the wires to the DW65v



9 – reinstall the assembly into the fuel tank and attach a length of hose to the outlet of the pump assembly allowing it to drain into a fuel safe container and prime the fuel pump assembly

10 – cycle the key to the on position as many times as required to prime the pump assembly and evacuate the air introduced during the pump installation process

11 – attach supply line to the outlet of the pump assembly