

# 9-201/301-1014 85-97 Mustang DW200/300 Fuel Pump Installation Guide



## Parts List:

- DW200/300
- Fuel Hose
- Hose Clamps (x2)
- Fuel Sock
- 10" Electrical Connector
- Fuel Pump Isolator
- Super Lube

85-97 Mustang DW200/300 Fuel Pump Install

PLEASE READ – this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the fuel pump assembly from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction.


Below is a picture of suggested tools that will make the installation process easier.



1 – remove the fuel sock from the base of the pump




2 – remove the hose clamps and push the pump out of the assembly

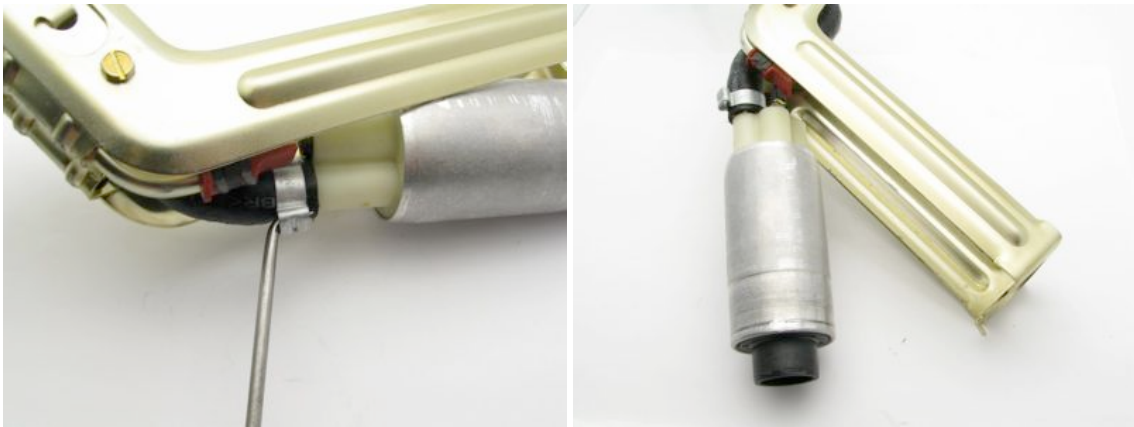

3 – disconnect the electrical connectors and remove the pump from the assembly



4 – remove the hose and set the assembly aside

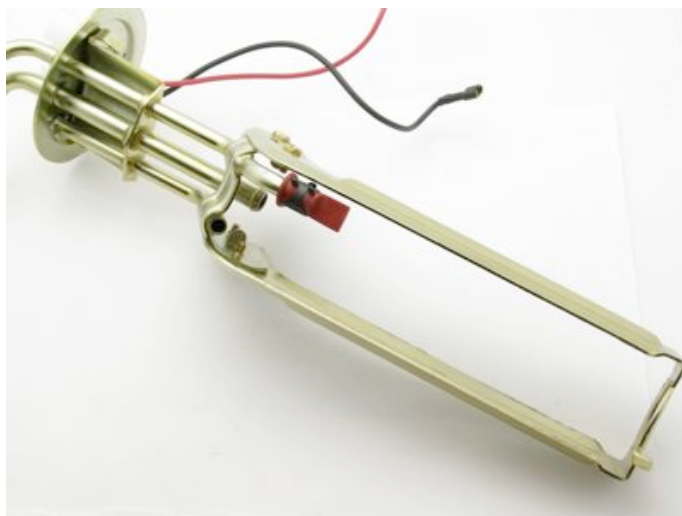

5 – install the new fuel hose and hose clamps



6 – install the DW200/300 into the assembly



7 – install the fuel sock, retainer clip, and isolator on to the pump



8 – wire-in the supplied electrical connector



9 – reinstall the assembly into the fuel tank and attach a length of hose to the outlet of the pump assembly allowing it to drain into a fuel safe container and prime the fuel pump assembly

10 – cycle the key to the on position as many times as required to prime the pump assembly and evacuate the air introduced during the pump installation process

11 – attach supply line to the outlet of the pump assembly