

9-401-1044

85-97 Mustang DW400 Fuel Pump Installation Guide



Parts List:

- DW401
- Fuel Hose
- Hose Clamps (x2)
- Fuel Sock
- 10" Electrical Connector
- Fuel Pump Isolator
- Super Lube

85-97 Mustang DW400 Fuel Pump Install

PLEASE READ – this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the fuel pump assembly from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction. The DW400 pump has a larger body than most in-tank pumps it will replace. Some cutting of the assembly should be expected for proper fitment


Below is a picture of suggested tools that will make the installation process easier.



1 – remove the fuel sock from the base of the pump



2 – remove the hose clamps and push the pump out of the assembly

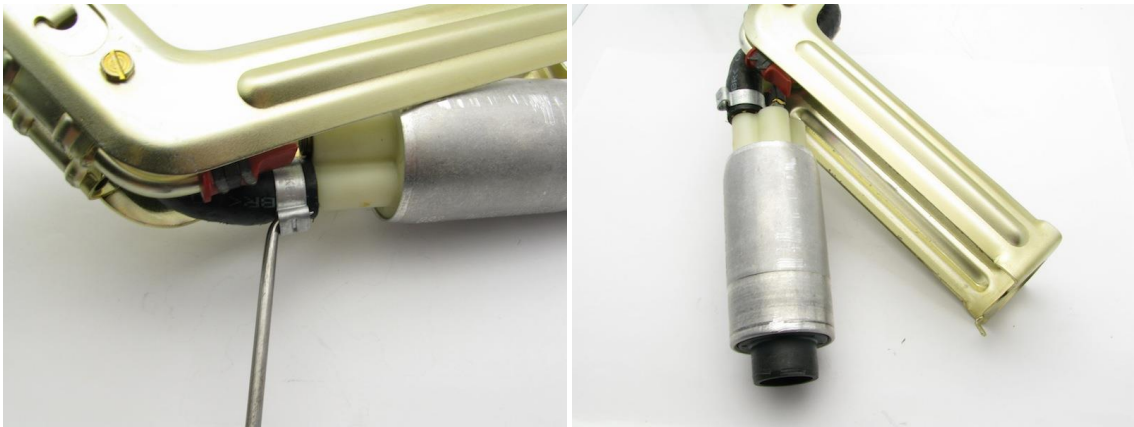

3 – disconnect the electrical connectors and remove the pump from the assembly



4 – remove the hose and remove the front lip from the base of the assembly



5 – install the new fuel hose and hose clamps



6 – insert DW400 into the hose and install the pump by pushing it into the assembly



7 – install the fuel sock and wire in the electrical connector (blue is positive, the extra negative lead can be clipped or mounted to the assembly as an additional ground)



8 – reinstall the assembly into the fuel tank and attach a length of hose to the outlet of the pump assembly allowing it to drain into a fuel safe container and prime the fuel pump assembly

9 – cycle the key to the on position as many times as required to prime the pump assembly and evacuate the air introduced during the pump installation process

10 – attach supply line to the outlet of the pump assembly