



Dee Zee Toolbox Installation Instructions

Congratulations on your purchase of a quality Dee Zee product. Dee Zee is recognized as having the highest quality running boards and accessories on the market today. We have earned this reputation by offering our customers a product they can be proud to place on their vehicles. Dee Zee meets all the criteria of manufacturing a custom-fit product which guarantees it to be the easiest product to install.

Note: Please take time to read all of the instructions before beginning this installation.

Note: Use J-Bolt provided or WARRANTY IS VOID...DO NOT USE self tapping screws to mount.

Warning! If it is necessary to drill any holes into the vehicle, Dee Zee recommends putting a sealant or rust inhibitor around all holes drilled into the body of the vehicle.

Cleaning Instructions: To maintain the bright finish of your Dee Zee Stainless Steel Toolbox, clean with a mild detergent and then apply a high grade automotive type wax.


Fifth Wheel Tool Box Installation Instructions

Fifth Wheel Toolbox:

Toolbox lid design may vary from picture with different toolbox models.

Cinquième

**Fifth Wheel
Toolbox-Front**

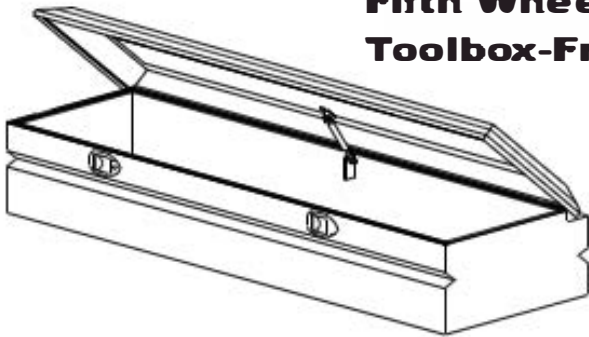

**Fifth Wheel
Toolbox-Rear**



A

X1

B

1/4 x 1" Sheet
Metal Screw



X4


C

Foam Tape



X2

Tools Required:
Outils Nécessaires:




3/8"






3/16"




1 Peel backing off of foam tape (C).

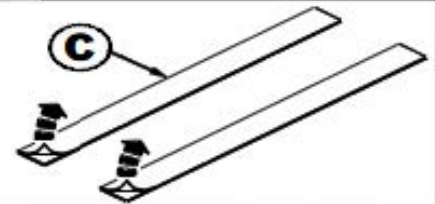


2 Place foam gasket () onto the bottom of Fifth wheel toolbox (A). Turn foam gasket () so that it is flush with the ends of fifth wheel toolbox (A).

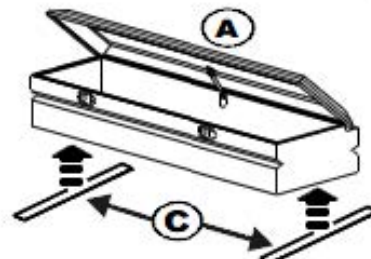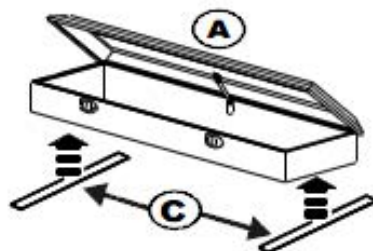

3

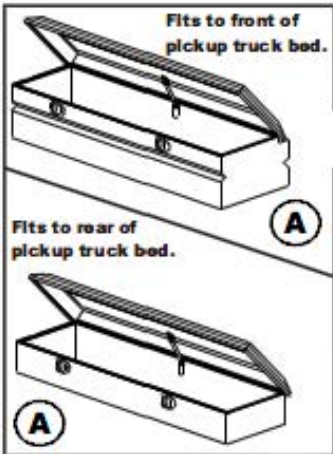

Place fifth wheel toolbox (A) into the back of your pickup truck bed.


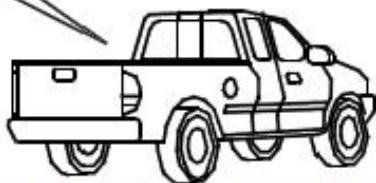


4

Locate the fifth wheel toolbox (A) in the pickup truck bed and then mark four hole locations in the bottom of fifth wheel toolbox (A). Drill a 3/16" hole at each marked hole location.



cinquième

cinquième

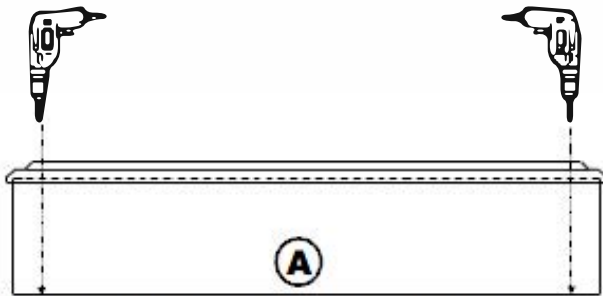


5

Attach fifth wheel toolbox (A) to the pickup truck bed using 1/4 x 1" sheet metal screws (B). Tighten them into place using a 3/8" wrench / or socket.

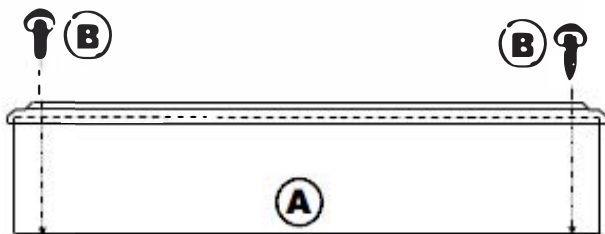


MAINTENANCE INSTRUCTIONS: All locks, latches, latching rods, and hinges should be lubricated regularly to assure smooth and proper operation for the life of the toolbox.

Toolbox Paddle Latch Assembly



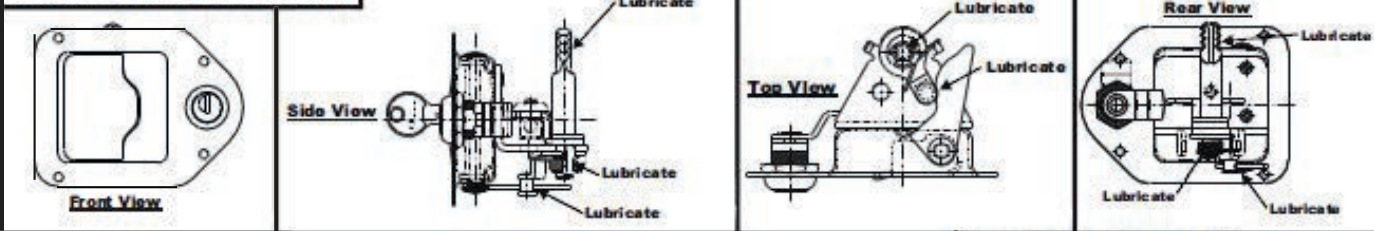


Toolbox Catch Assembly

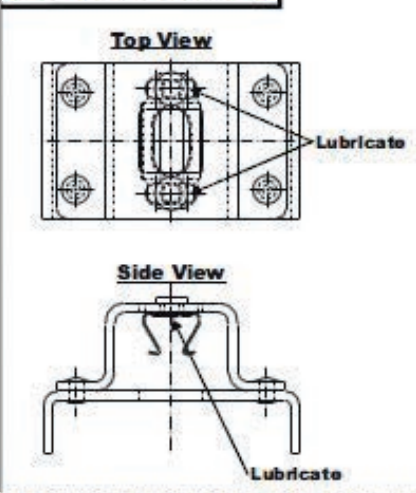


Replacement Parts for 5th Wheel Toolbox

Toolbox Hook-Paddle Latch Assembly



Toolbox Hook-Catch Assembly

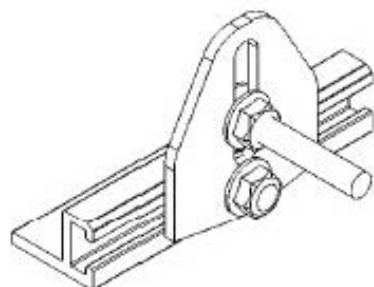

C-Channel Extrusion
Part Number: B 1602



Rotary Plate - Adjustable Latch
Part Number: B 1601



1/4-20 Hex Head Cap Screw
Part Number: PN 708



1/4-20 Threaded Stud
Part Number: PN 810



1/4-20 Flange Locknut Zinc
Part Number: PN 178



1/4-20 Nylon Locknut Ultra
Part Number: PN 341B



Nylon Standoff
Part Number: PN 860



Pushbutton - Blue Series

Spacer Brace for Push Button
Part Number: B 1623



Adjustable Latch
Part Number: B 1610



Carburetor Clip 7R
Part Number: LCC-2



Mounting Bracket
Part Number: B 1625



Shock Mount
Part Number: 3L-09



Nylon Bushing
Part Number: PN 118



5/16-18 Nyl Insert Locknut
Part Number: PN 510



10 x 1/8 Square Pan Self Drill
Part Number: PN 872



Push Latch
Part Number: TB 85623



Rotary Latch
Part Number: TB 85624




Rod End Adaptor
Part Number: TB 85626




Replacement Parts for 5th Wheel Toolbox Cont.


Shocks




| Blade Style Shock | | | |
|-------------------|--------|--------|--------|
| Shock # | 20# | 40# | 70# |
| Part Number | SL1-20 | SL1-40 | SL1-70 |



| 10mm Socket Style Shock | | | |
|-------------------------|---------|---------|---------|
| Shock # | 20# | 40# | 70# |
| Part Number | SL-3020 | SL-3040 | SL-3070 |




| 10mm Socket Style Shock | | | | | |
|-------------------------|---------|---------|---------|---------|-----------|
| Shock # | 20# | 40# | 60# | 80# | 100# |
| Part Number | SL-3220 | SL-3240 | SL-3260 | SL-3280 | SL-321000 |



| 10MM Socket Style "Long" Style Shock | | |
|--------------------------------------|---------|---------|
| Shock # | 90# | 40# |
| Part Number | SL-3390 | SL-3340 |

Miscellaneous Parts

Foam Latch Gasket
Part Number: T88540B



Shock Clip
Part Number: SL-81




Striker Assembly
Part Number: T885616




Shock Mount Nut
Part Number: PN 301




Latch Cover Rivet
Part Number: PN 285




Latch Rivet
Part Number: PN 157




Hinge Rivet
Part Number: PN 762



Shock Mount
Part Number: SL-69



Rod Clip
Part Number: L0C-1



Rod Guide
Part Number: T888616



1/4" Flat Washer
Part Number: PN 72B



1/4 x 1" Sheet Metal Screw
Part Number: PN 67B



1/4 x 1" Sheet Metal Screw
Part Number: PN 67



1/4 x 1" Button Head Screw
Part Number: PN 96B



1/4" Locknut
Part Number: PN 341B



Mounting Bracket
Part Number: T8BRACE1



Divider Mounting Channel
Part Number: TB Channel




Toolbox Divider
Part Number: TB Divider




Toolbox Divider Tape
Part Number: CO-Tape




Rear View: Locking Latch
Part Number: T885613



Rear View: Non-Locking Latch
Part Number: T885614



Rear View: Locking Hook
Part Number: T885608



Rear View: Non-Locking Hook
Part Number: T885608

