


PARTS INCLUDED

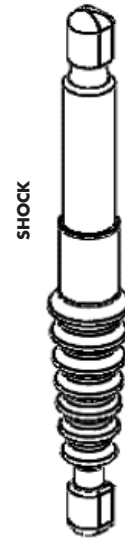

PARTS LIST

- SHOCK 1
- TOOLS REQUIRED:**
- FLAT HEAD SCREWDRIVER
- T-25 TORX
- RAG

STEP 1


*** NOTE: THIS PRODUCT CAN ONLY BE INSTALLED ON THE DRIVER'S SIDE.**

Remove cable by lifting on spring and slightly lifting Tailgate



STEP 2

Using a T-25, remove the two bolts holding Tail light in place. Then remove the two plastic push rivets by the bolts by using a straight blade screwdriver to pry off.

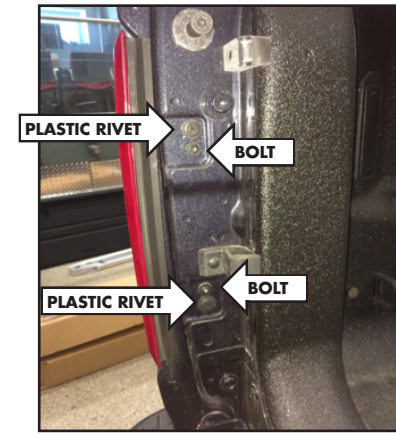

STEP 3

Remove tail light by pulling rearward on the light.



STEP 4


Once tail light is removed from truck, rest the tail light on a rag between the light and the truck.



NOTE: The taillight may contain a blind spot sensor. Detaching the light and turning the ignition to "ON" may affect this sensor. Do NOT disconnect the taillight and turn the key.

STEP 5

With the Tailgate down, install the bottom of the shock with onto the ball shown below. the bottom end of the shock is the end with the rubber cover.

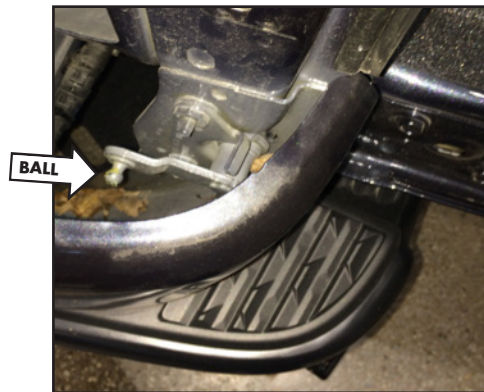

STEP 6

With the tailgate up, install the top of the shock onto the upper ball mount.



STEP 7

Lift tail light from the truck and remove the rag.



STEP 8

Reinstall tail light by gently pressing forward on the light.



STEP 9

Reinstall plastic rivets and bolts.



STEP 10

Attach cable by lifting on the Tailgate then pressing the end of cable onto the truck.



*Periodically check the upper and lower mounting locations to insure that parts have not loosened through repeated use. If either mounting location is found to be loose, re-tighten the hardware as needed.

FAQ's

Can the Tailgate Assist be installed on the passenger's side?

No. The unit will not work on the passenger side of the truck bed. Installing the tailgate assist on the passenger side can cause the tailgate to come off the truck.

DZ 43302 DODGE RAM TAILGATE ASSIST 2019 (1500 ONLY)



Looking for dependable truck bed accessories? Rely on Dee Zee for quality and long-lasting products.