

Before returning this product to the store of purchase

Contact Dee Zee if you experience the following problems:

- Missing Parts
- Installation Problems/Questions
- Warranty Questions



Dee Zee Running Board Installation Instructions

Congratulations on your purchase of a quality Dee Zee product. Dee Zee is recognized as having the highest quality running boards and accessories on the market today. We have earned this reputation by offering our customers a product they can be proud to place on their vehicles. Dee Zee meets all the criteria of manufacturing a custom-fit product which guarantees it to be the easiest product to install.


Note: Please take time to read all of the instructions before beginning this installation.


Warning! Please check for wiring or other obstructions before drilling any holes into the vehicle. If it is necessary to drill any holes into the vehicle, Dee Zee recommends putting a sealant or rust inhibitor around all holes drilled into the body of the vehicle.

Warning! It is the sole responsibility of the vehicle owner to check for tire clearance.

Warning! It is unlawful and dangerous to ride on running boards or side box boards while the vehicle is in motion.


Cleaning Instructions: To maintain the bright finish of your Dee Zee running boards, clean with a mild detergent. For our stainless steel products and accessories, the application of a high grade automotive type wax is recommended.

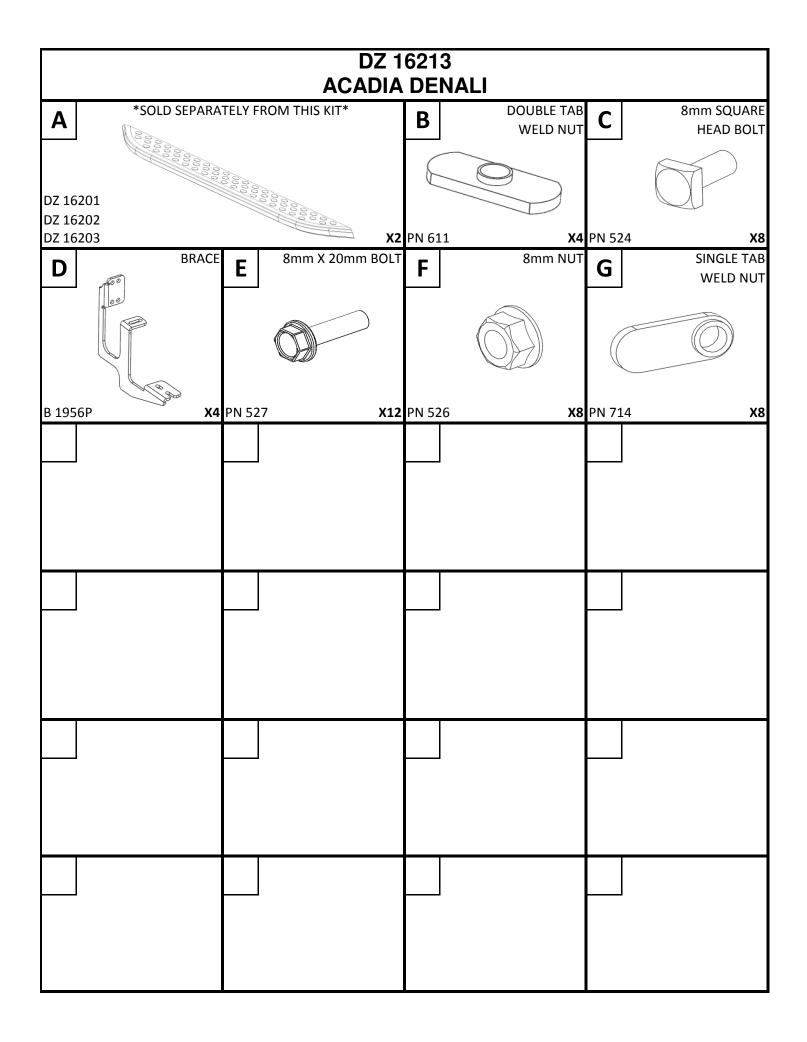

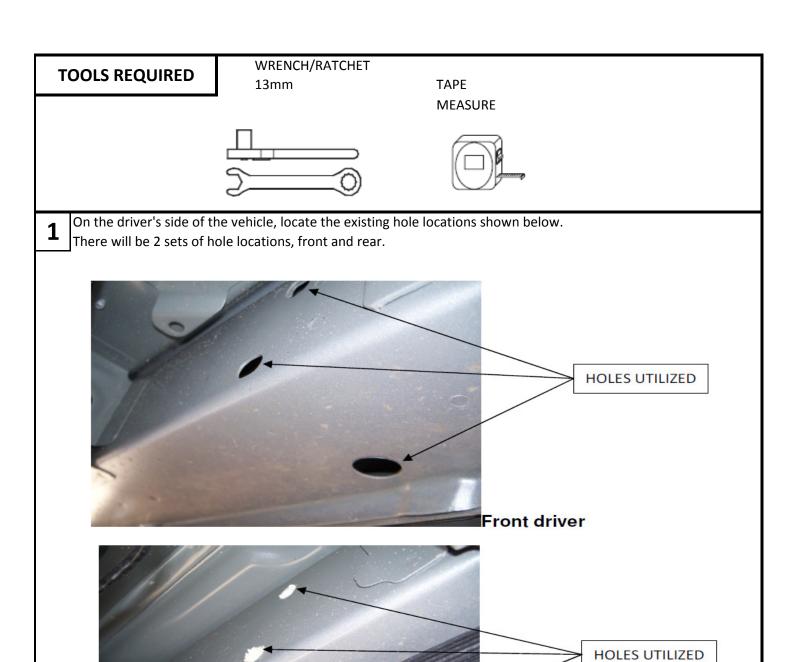

Rear driver

Place an 8mm x 20mm hex head bolt [E] through the brace [D] and thread the bolt into a double tab weld nut [B] in the slot as shown below. Then place two 8mm x 20mm hex head bolts [E] through the holes in the brace and thread them into two single tab weld nuts [G] as shown below.

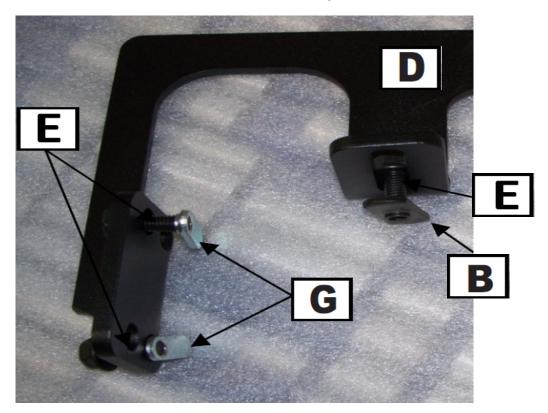

Position the brace into the front location with the weld nuts in the vehicle openings. Partially tighten the bolts, but not completely.




Repeat step 2 for the rear brace.

Position the brace into the rear location with the weld nuts in the vehicle openings. Partially tighten the bolts, but not completely.



Slide two square heade bolts [C] into the channels on the unerside of the running board.

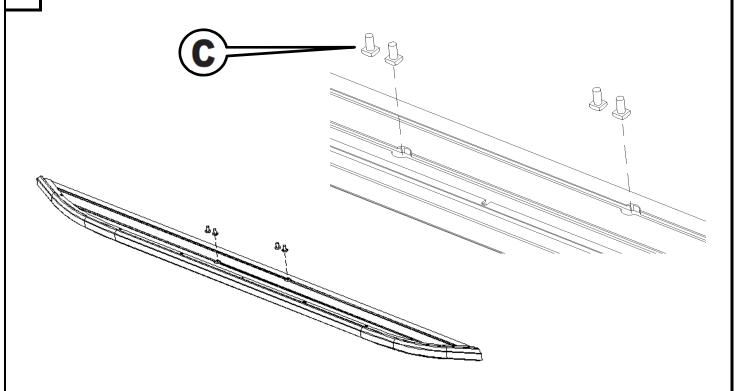

Place the running board onto the braces. Align the 8mm square head bolts installed in the previous step with the slots in the brackets. Once the board is on the brace, completely tighten the braces to the vehicle. Center the board between the wheel well using a tape measure. Slide the board in/out as needed to properly line up with the vehicle. Secure the board to the braces using the 8mm flange nuts [F].



Repeat these steps for the passenger side.