




**READ** complete manual CAREFULLY BEFORE attempting operation.

**SAFETY CABLES**  
 (STANDARD FOR *Excalibur™*, *Aluminator™* & REQUIRED FOR TOWING)

**USED  
ON TOW  
BARS**

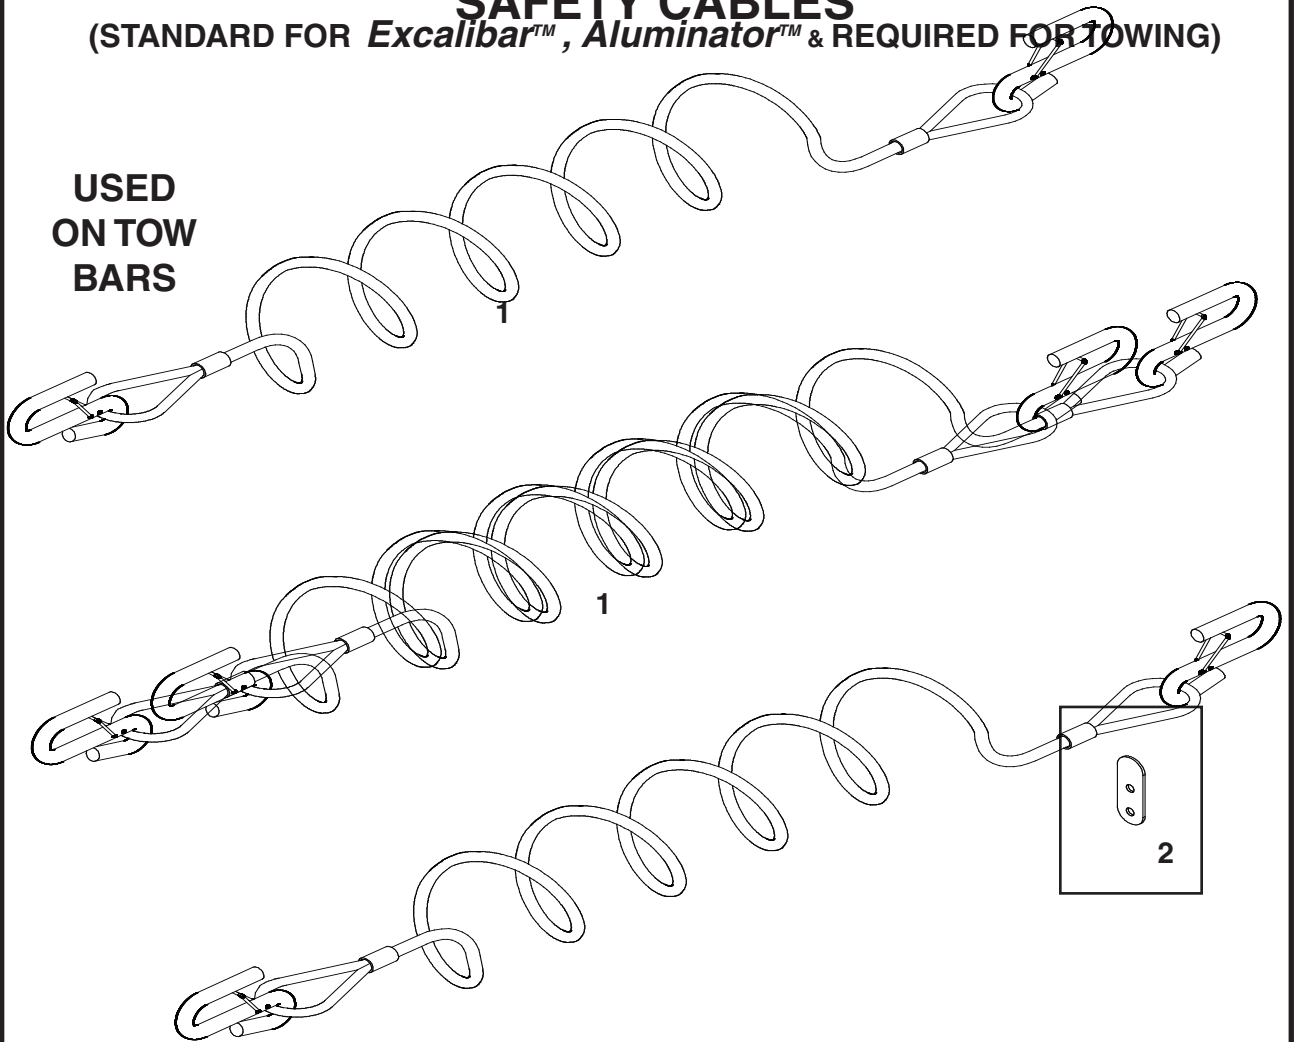

**INSTALLATION**

Install hook through outside hole and pull around to the other side. Anchor hook to towing and/or towed vehicle. Then turn and stretch center hole of strap over hook leg to secure hook.

**PARTS LIST**

REF. NO.	PART NO.	QTY.	DESCRIPTION
	<b>9523003</b>		<b>Safety Cable Kit (complete)</b>
1.	<b>07230</b>	2	Coiled Safety Cable w/Hooks
2.	<b>07426</b>	-	Safety Hook Retainer (Replacement Only)

Please order replacement parts by PART NO. and DESCRIPTION.

OPERATORS MANUAL

Doing Our Best to Provide You the Best