



BULB & SOCKET TAILLIGHT WIRING KIT


Installation Instructions for 9523047

1. Access the backside of both taillight assemblies of the towed vehicle. Many vehicles you must remove interior trim panel to gain access to the taillight assembly or unbolting the taillight from the outside. It is best to leave existing wire connected.
2. Cut off one end of the 26 foot long Conductor wire harness and run the harness back to the Driver Side taillight assembly.
3. The bulb and socket are installed into the back of the tail light assemblies. The location should be as flat as possible and behind a red lens. Do not install behind an amber or clear lens. The location should have enough clearance for the bulb inside and the socket on the backside.
4. After determining the proper location, drill a 29/32" hole or drill/ hole saw a 7/8" hole and rat tail file to fit into the tail light housing. Press the socket into the housing and repeat process in Passenger Side taillight assembly.
5. Make your connections as shown in the diagram on the back side of this page.
6. Be sure to seal all of the holes used to route the conductor wire harness and holes drilled for the light bulb sockets.

READ *complete manual CAREFULLY*
BEFORE attempting operation.

Doing Our Best to Provide You the Best

(FROM MOTOR HOME)
26FT CONDUCTOR CABLE

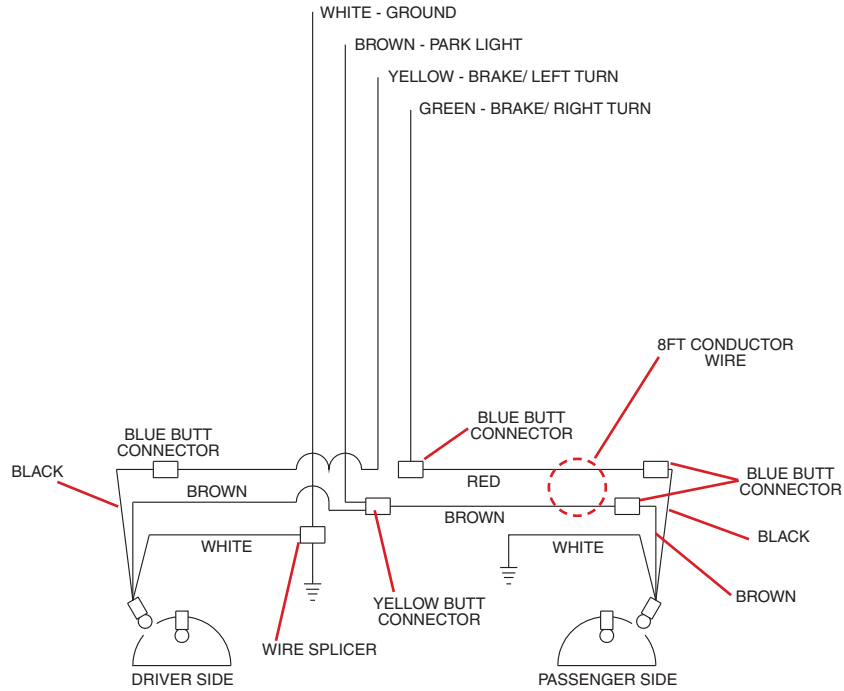

TAIL LIGHT KIT CONTENTS

PART NO.	QTY.	DESCRIPTION
13060	1	26', 4-CONDUCTOR CABLE
07378	4	BLUE BUTT CONNECTOR
13062	1	YELLOW BUTT CONNECTOR
13139	2	LIGHT SOCKET
13138	2	LIGHT BULB
NHT11	6	NYLON WIRE TIES
01883	5	SELF STRIP WIRE TAP CONNECTOR
12171	3	SELF TAPPING SCREW
SPT14 2	1	8', 2 CONDUCTOR CABLE
57085	3	TERMINAL RING

