**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

#### REMOVAL/INSTALL OF WINDOW REGULATOR (740-821) Chevrolet Malibu 1997–2003, Chevrolet Malibu Classic 2004–05, Oldsmobile Cutlass 1997–99


#### **General Tech Tips:**

- Use painter's tape rather than duct tape to secure window. It will not damage paint or leave sticky residue.
- A plastic pry tool is useful. It will not easily damage delicate trim like a screwdriver or metal pry bar.
- The replacement regulator should have a liberal amount of grease on slide area. If there is not much grease present, white lithium grease works well to lubricate the slide area.
- Aftermarket window tinting can cause the window to travel slower and put additional strain on the window regulator assembly.
- Window run channels should be cleaned and lubricated before installation of a new window regulator assembly. Silicone spray works well.

Tools required for removal and installation of window regulator and motor assembly:

- Silicone spray lubricant
- Trim panel removal tool
- Pick
- Saddle cup assembly, tape or wedge to hold window in place
- Flat-blade screwdriver or plastic pry tool
- 10 mm socket or driver
- Phillips screwdriver
- Grease pencil or marker
- 8 mm socket

### PLEASE WEAR SAFETY GLASSES!



**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

### **Removal Instructions**

**STEP 1:** Using a trim panel removal tool, remove the rear view mirror bezel.



**STEP 2:** Remove the Phillips head screw attaching the interior door handle bezel assembly to the door.

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

## **STEP 3:** Disconnect the power door lock switch.



**STEP 4:** Using a pic or small flat-blade screwdriver remove the interior door trim panel attaching screw cover.




**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

# **STEP 5:** Using an 8 mm socket remove the door trim panel attaching screws.

**STEP 6:** Using a trim panel removal tool, remove the interior door trim panel. **NOTE:** You may want to use a plastic trim panel tool to prevent scratching the painted surface.

**STEP 7:** With the interior door trim panel removed from the door, disconnect the master power switch assembly.







**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

STEP 8: Remove the interior door trim panel.

**STEP 9:** Remove the four (4) door speaker attaching screws.

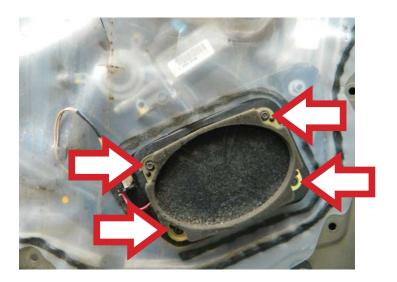

**STEP 10:** Disconnect the door speaker.

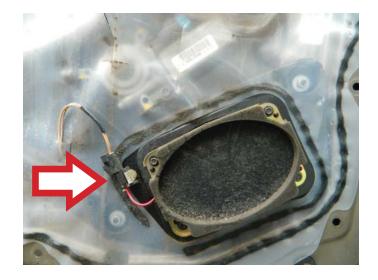



**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

**STEP 11:** Once the door speaker has been removed, remove the water vapor barrier.

**STEP 12:** Disconnect the interior door handle latch rods from the interior door handle.

**STEP 13:** Remove the Phillips head screw that holds the interior door handle assembly onto the door.



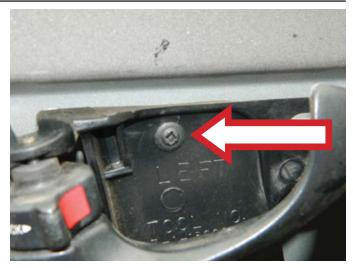

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.


**STEP 14:** Temporarily connect the power window switch to lower the door glass to expose the two (2) door glass attaching bolts.

**STEP 14a:** Once the door glass is disconnected from the window regulator, slide the door glass into the up position and hold in place with either a saddle cup assembly, tape, or wedge.

# **STEP 14b:** Disconnect the window lift motor.



**STEP 15:** Remove the window regulator assembly attaching screws.

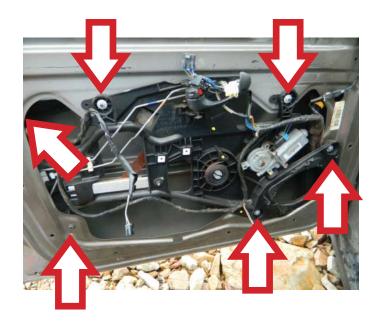

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

**STEP 16:** With the window regulator assembly removed, remove the three (3) window lift motor attaching screws. **NOTE:** BE VERY CAREFUL WHEN REMOVING THE WINDOW LIFT MOTOR. THE PRE TENSIONER SPRING IS UNDER PRESSURE AND CAN INFLICT BODILY INJURY IF EXTREME CAUTION IS NOT USED.

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

### **Installation Instructions**

**STEP 1:** Install the window regulator onto the plastic panel assembly.

**STEP 2:** Attach the three (3) window lift motor attaching screws to the window lift motor.




**STEP 3a:** Connect the window lift motor.





**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

**STEP 3b:** Attach the window regulator assembly attaching screws.

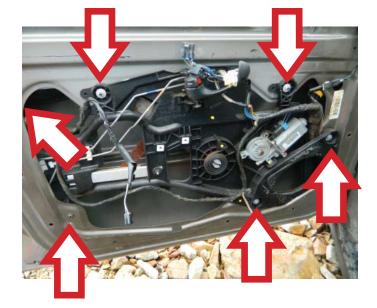

**STEP 4:** Temporarily install the master power switch assembly to raise or lower the window regulator for the door glass attaching points.

STEP 4a: Lower the door glass into position and attach to the window regulator.


STEP 5: Install the interior door handle.



**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

## **STEP 5a:** Connect the interior door handle latch rods.



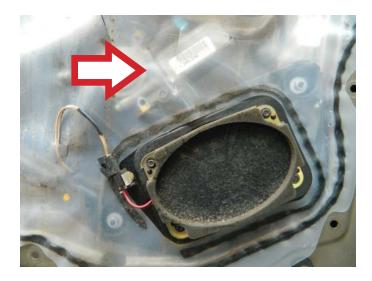



**STEP 6:** Attach the water vapor barrier.

STEP 7: Install the door speaker

**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

### **STEP 7a:** Connect the door speaker.

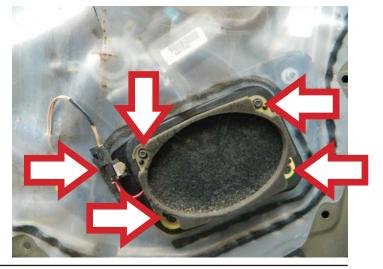



**STEP 8:** Connect the master power switch assembly.

**STEP 9:** Align the interior door trim panel retainers with their corresponding holes and push the interior door trim panel into place.



**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

# **STEP 10:** Attach the interior door trim panel retaining screws.





**STEP 11:** Install the interior door trim panel attaching screw cover.

**STEP 12:** Connect the power door lock switch.



**ATTENTION:** Refer to the appropriate shop manual for your vehicle to obtain specific service procedures for this part. If you do not have a service manual or lack the skill to install this part, it is recommended that you seek the services of a qualified technician. Pay special attention to all cautions and warnings included in the shop manual. Read and follow all instructions carefully.

**STEP 12a:** Install the interior door handle bezel assembly.



**STEP 13:** Install the rear view mirror bezel assembly.

**STEP 14:** Verify that the window regulator is operating properly and that all of the interior door trim panels retainers are installed.