





PRO-CFX

2 WAY CROSSOVER
HIGH AND LOW FREQ



OWNER'S MANUAL

PRO-CFX **2 WAY CROSSOVER**
HIGH AND LOW FREQ

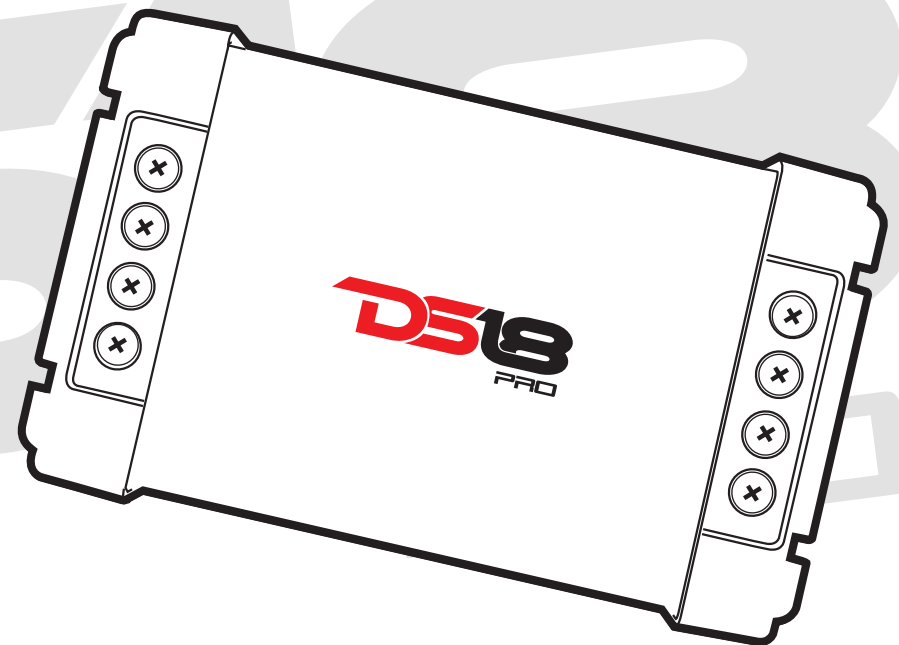



2 WAY CROSSOVER
HIGH AND LOW FREQ

PRO-CFX


Specifications:

- 2-Way Passive Crossover (High and Low Frequency)
- Frequency Crossover: 3.5KHz (@ 4 ohms)
- Power Handling: Up to 300 Watts
- Cut off Slope: 12dB/oct
- Top Cover Material: Steel
- Bottom Cover Material: Clear Acrylic
- Dimensions: 6.3" x 3.5" x 1.5" (160 x 88 x 38 mm)

Connectors:

- TW-: Tweeter (Negative)
- 0dB: Tweeter (Positive)
- -3dB: Tweeter Attenuation -3dB (Positive)
- -6dB: Tweeter Attenuation -6dB (Positive)
- W+: Woofer (Positive) Connect to Speaker
- W-: Woofer (Negative) Connect to Speaker
- IN+: Input (Positive) Connect to Amp.
- IN-: Input (Negative) Connect to Amp.

Graphics:

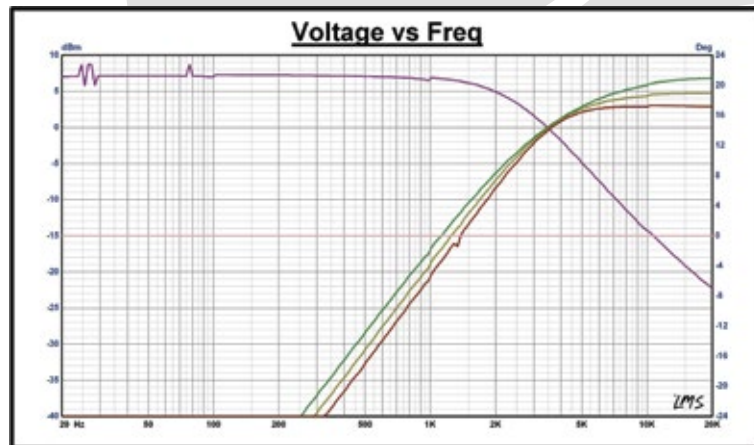

2 WAY CROSSOVER
HIGH AND LOW FREQ

PRO-CFX

