
DS18 PRO

PRO-DKNXS

NEODYMIUM TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT

- Peak Power Handling: 680 Watts
- Program Power Handling: 340 Watts
- AES Rated Power: 170 Watts
- Sensitivity (1w/1m): 118dB
- Frequency Response: 630Hz-18KHz
- Nominal Impedance: 8 ohm
- Throat Diameter: 2″
- Recommended Hi Pass Crossover: 900Hz
- Voice Coil Diameter: 2.03″
- Diaphragm Material: Titanium
- Magnet Material: Neodymium
- Magnet Size: 4 mm x 134 mm Diameter
- Bolt Type: Bolt-on

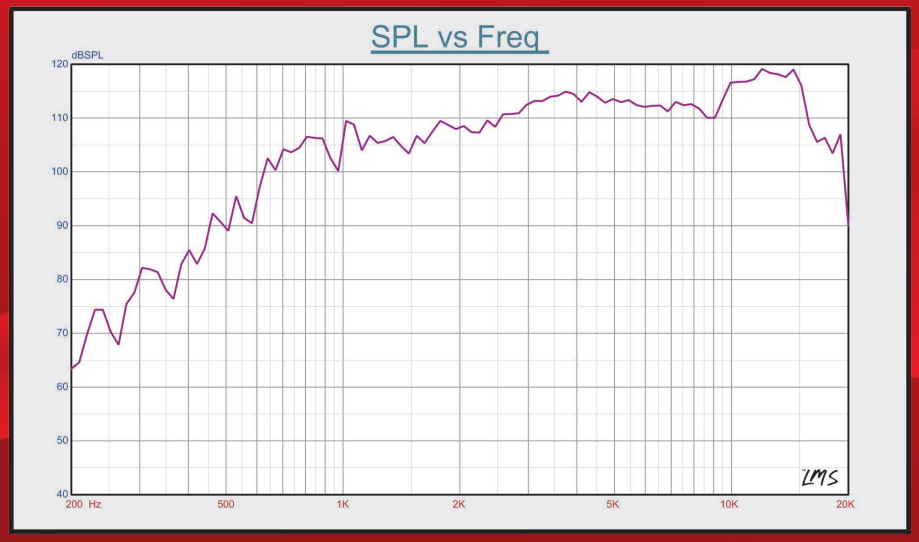

DS18 PRO

PRO-DKNXS

NEODYMIUM TITANIUM COMPRESSION DRIVER AND ALUMINUM SHORT HORN KIT

2.03″ VC

COMPRESSION RING +3dB COMPRESSION RING

MAGNETS + NEODYMIUM - MAGNETS



680W Peak Power


340W Program Power


8 OHMS

OWNER'S MANUAL

PRO-DKNIXS

NEODYMIUM TITANIUM COMPRESSION
DRIVER AND ALUMINUM SHORT HORN KIT

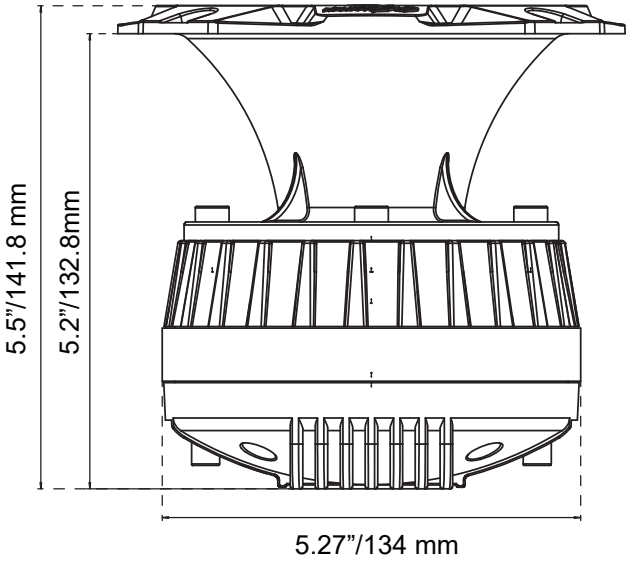

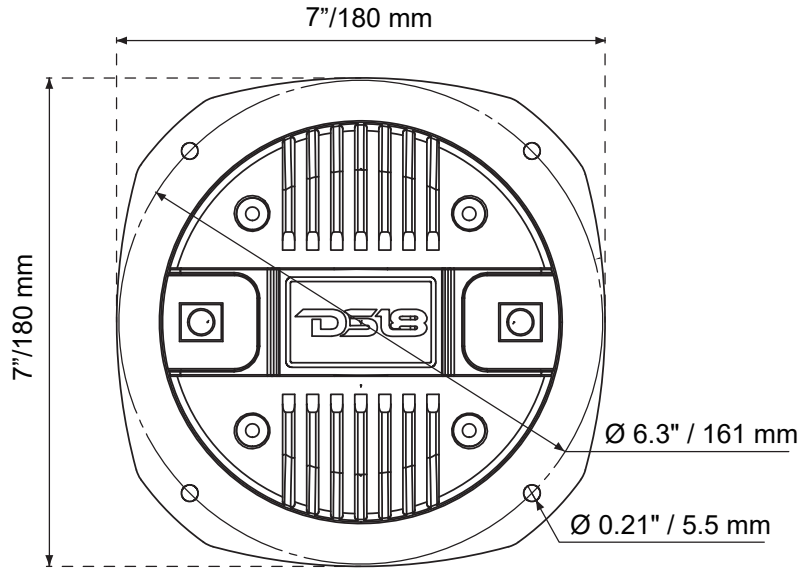

WWW.DS18.COM

DS18 PRO

Data Sheet

PRO-DKNIXS
NEODYMIUM TITANIUM COMPRESSION
DRIVER AND ALUMINUM SHORT HORN KIT

Specifications:

Throat Diameter	2”/50.8mm
Installation Type	Bolt-on
Nominal Impedance	8 OHMS
Peak Power Handling	680W
Program Power Handling	340W
AES Power Handling	170W
Sensitivity (1w/1m)	118 dB
Frequency Response	630Hz-18KHz
Recommended HI Pass Crossover	900 Hz

Motor

Voice Coil Diameter	2.03”/51mm
Voice Coil Former Material	Kapton
Winding Material	CCA
Diaphragm Material	Titanium
Magnet Material	Neodymium
Magnet size	4 mm Thick x 134 mm Diameter

Measurements

Overall Diameter	7”/180 mm
Overall Depth	5.5”/141.8 mm
Bolt Pattern/Type	5.5mm hole - 6.3”/161 mm Diameter
Mounting Depth	5.2”/132.8mm
Mounting Hole Diameter	5.7”/145mm

Learn more about car speakers on our website.