

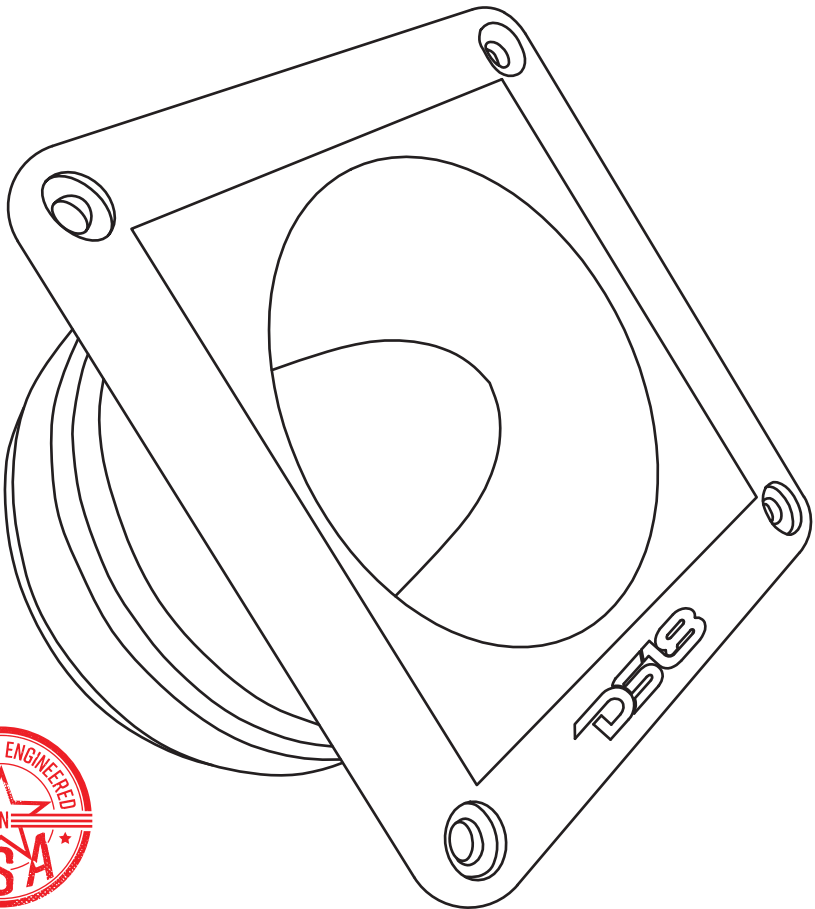



DS18[®]
PRO

PRO-TWX6
1.5" VC ALUMINUM SUPER
BULLET TWEETER

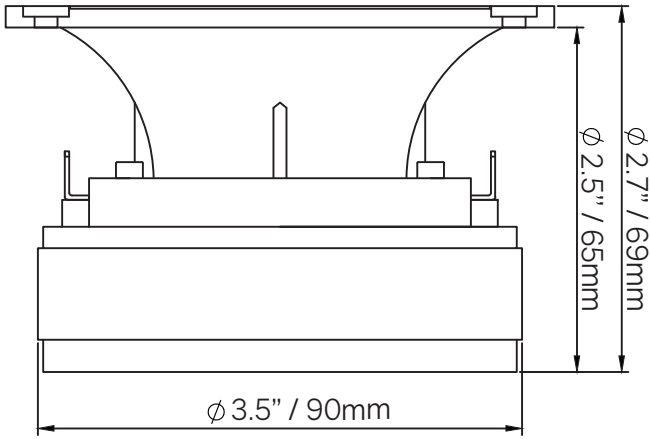

PRO-TWX6

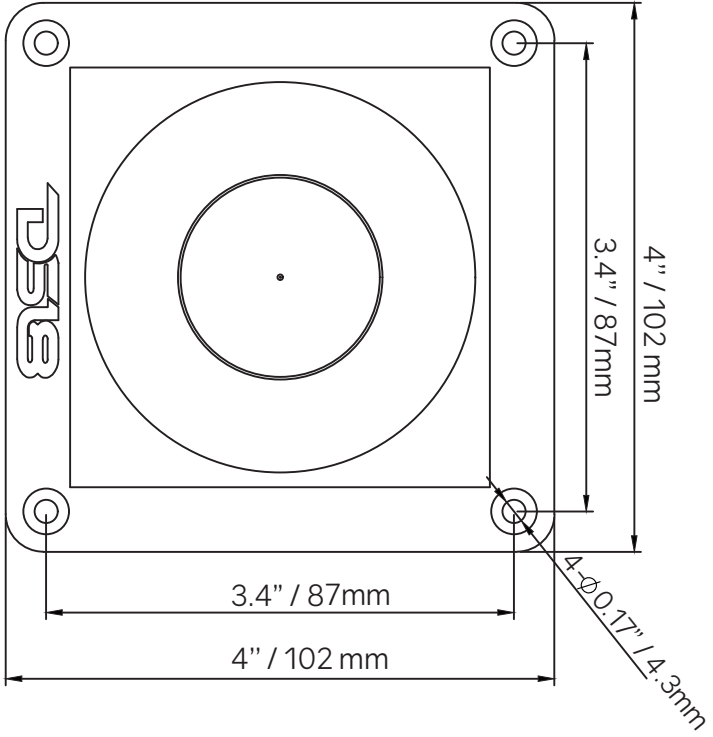

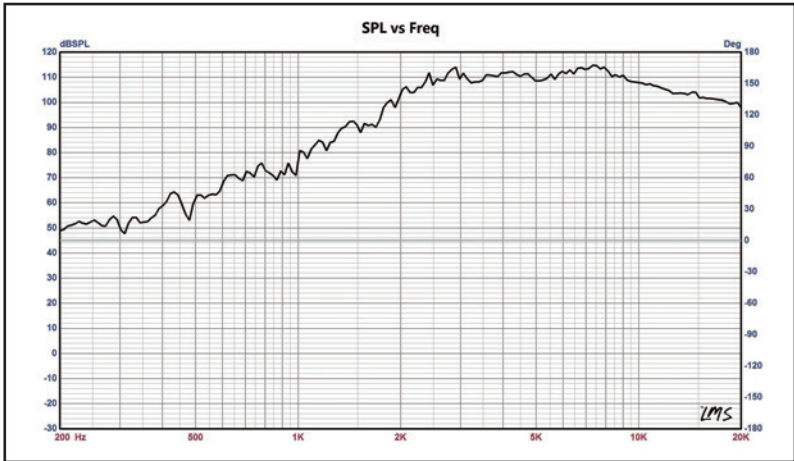

Specifications:

- Nominal Diameter 4"x4" / 102x102mm
- Nominal Impedance 8 ohms
- Peak Power 480 watts
- Program Power 240 watts
- AES Power 120 watts
- Sensitivity (1w/1m) 112 db
- Frequency Response 1.7Hz - 20KHz
- Recommended Hi Pass Crossover 2.5hz

Motor:

- Voice Coil Diameter 1.5" / 38mm
- Voice Coil Former Material KSV
- Winding Material SN
- Diaphragm Material Titanium
- Body Material Aluminum
- Magnet Material Ferrite
- Magnet Weight 15 oz

Measurements:

- Overall Diameter 4"x4" / 102x102mm
- Front Mount Baffle Cutout 3.5" / 90mm
- Overall Depth 2.7" / 69mm
- Mounting Depth 2.5" / 65mm
- Motor Diameter 3.5" / 90mm