






Installing a high performance exhaust system has never been easier. These new direct fit systems have been designed to follow OEM routing and mounting points exactly. You don't have to cut or weld brackets and pipes to muffler bodies.

Now you can "bolt-on" a complete <u>DynoMax high performance system</u> — featuring the power boosting Super Turbo Muffler.

## CHEVROLET/GMC C/K SERIES PICKUP

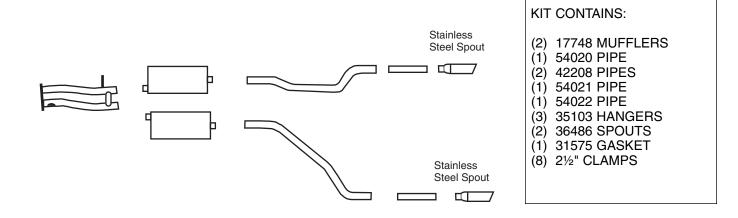

## **APPLICATION DATA**

Year	Cyl.	Model & Engine	Int. Pipe	Muffler	Ext. Pipe	Tail Pipe	Clamps
1996-97	8	C/K 1500/2500 w/5.7L, 141.5" WB (Under 8600 GVW)	54020	(RH) 17748 (LH) 17748	(RH) 42208 (LH) 42208	(RH) 54021 <sup>1</sup> (LH) 54022 <sup>2</sup>	21⁄2 (8)

1 Install 35103 Hanger at Inlet and Outlet.

2 Install 35103 Hanger at Outlet.