


REVISION HISTORY							
REV.	DESCRIPTION	DATE					
Е	REVISE PER LM10214	2011-09-16					
F	REVISE PER LM10214	2011-09-22					
G	REVISE PER LM10214	2011-09-27					

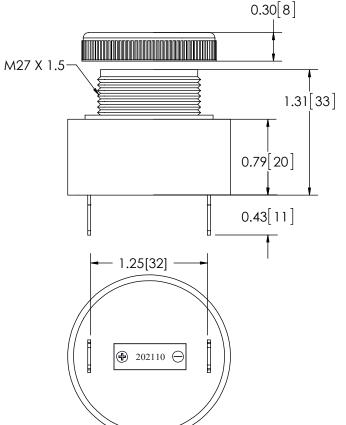

## **SPECIFICATIONS**

1. CERTIFICATIONS:

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. SOUND PRESSURE LEVEL: MIN 80 dB(A) @ 12VDC @ 30cm (1ft)
- 3. VOLTAGE (NOMINAL): 12 to 48 VDC (dB INCREASES WITH VOLTAGE)
- 4. VOLTAGE (EXTREME): 9.0 to 56.0 VDC
- 5. CURRENT (PEAK): 0.1 A (@ 12 VDC NOMINAL)
- 6. POWER (MAXIMUM): 1.0 W (@ 12 VDC NOMINAL)
- 7. TEMPERATURE RANGE: -4°F (-20°C) TO 140°F (60°C)
- 8. FREQUENCY: 2900 Hz
- 9. CONNECTION: 1/4" SPADE TERMINALS
- 10. RECOMMENDED MOUNTING: FLANGE
- 11. HOUSING MATERIAL: ABS
- 12. PRODUCT WEIGHT: 0.1 LBS (0.05 Kg)

DISCLAIMER
Dimensions, Illustrations, Specifications, and Certifications contained in this document are typical of the actual product and are subject to change. ECCO Engineering does not maintain formal Design control of this product.

## NOTES:

1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERINGINFORMATION ONLY. THE DRAWING AND JOR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OF USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2005 ECCO.

SCALE 1:1			APPRO	SJAVC	DATE					
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.			DRAWN BY	MDH	2011-09-26					
MODEL REFERENCED:B		CHECKED	JDT	2011-09-26						
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE:			MECH. ENG.	NMT	2011-09-27					
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES ± 0.5°	ELEC. ENG.	JES	2011-09-27	AU	DIBLE SIGNAL,S	LOW	PULSE, 12-48	BV
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.	JRT	2011-09-27	CUSTOMER PAR			PRODUCT SERIES:	
		± 1/64	SALES.	DEH	2011-09-27	202110	J		ASD	
THIRD ANGLE PROJECTION						SIZE: A	DWG. NO.	2021	10	REV.
						SHEET 1 OF 1	Project: CR# 1862	Date Cr	eated: 2005-02-14	G