


| REVISION HISTORY | | |
|------------------|----------------------------|------------|
| REV. | DESCRIPTION | DATE |
| | | |
| A | INITIAL RELEASE PER P14011 | 2020-02-20 |

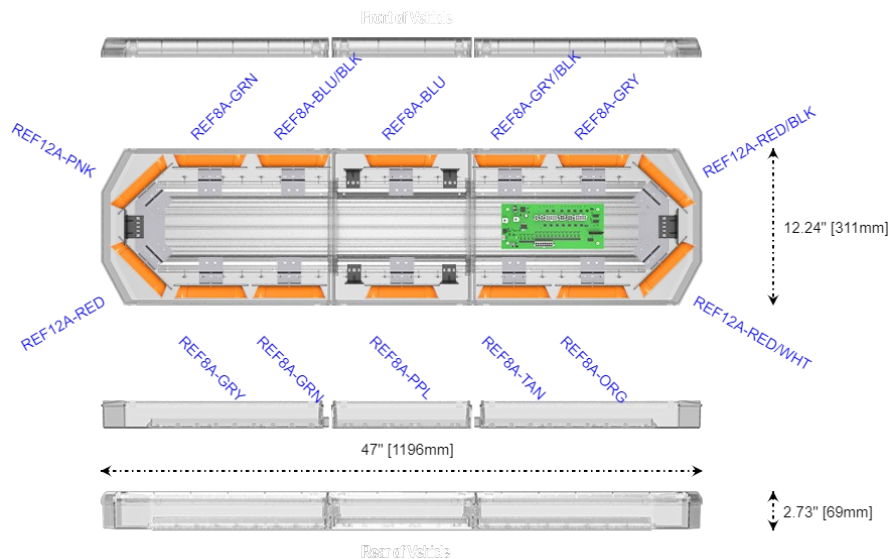

SPECIFICATIONS

1. FLASH MODE:
2. VOLTAGE (NOMINAL):
3. CURRENT (NOMINAL):
4. CONNECTION:
5. MOUNTING:
6. BASE MATERIAL:
7. LENS MATERIAL:
8. WITH HANDHELD CONTROLLER:

NOTES:

1. CABLES AND WIRES NOT SHOWN
2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
3. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
4. CABLE LENGTH X.Xm[XX.X'] FROM INTERNAL CONNECTOR
5. CABLE EXIT - DRIVER'S SIDE
6. LED LENSES ARE COLORED FOR CLARITY ONLY
7. DIMENSIONS IN MILLIMETERS [INCHES (FOR REFERENCE)]

Learn more about emergency and warning lighting on our website.

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR PROSSESSON OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2015 ECCO

| SCALE 1:9 | | APPROVALS | DATE | | | |
|---|---|---|------|--------------------|---------------------|--------------------------|
| CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. | | DRAWN BY | | | | |
| MODEL REFERENCED: | | CHECKED | | | | |
| TOLERANCES ARE IN INCHES AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE: | | | | | | |
| MILLIMETERS DECIMALS XX ± 1.0mm XX.X ± 0.5mm | INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 | ANGLES ± 0.5° | | LBR,27CC,47"/1.19M | | |
| THIRD ANGLE PROJECTION | | FRACTIONS ± 1/64 | | SIZE: A | DWG. NO. 27-00004-E | REV. A |
| | | Electronically Controlled Use Latest Copy | | SHEET 1 OF 1 | Project: P14011 | Date Created: 2020-02-20 |