


REVISION HISTORY		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE PER P09039	2011-03-08
B	REVISE PER LM11208	2011-08-26
C	REVISE PER LM11208	2017-04-27

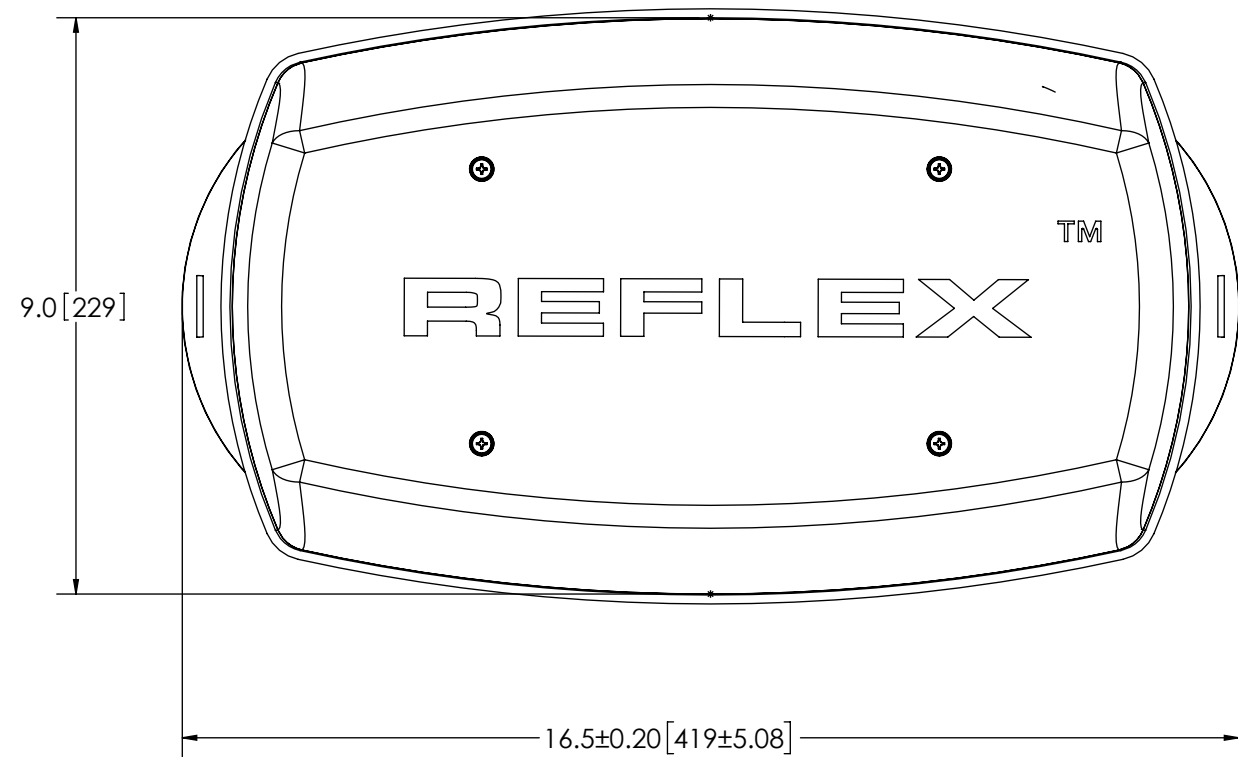


15' [4572] CORD W/DUAL SWITCH LIGHTER ADAPTER

SPECIFICATIONS

- CERTIFICATIONS: **CE**; ECE R10; SAE J845 (JUN 2013); CLASS 2 YELLOW (AMBER); IP-35C For a Category 2 Enclosure

Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- FLASH MODE: DOUBLE : 75 ± 5 FLASHES PER MINUTE
QUAD : 75 ± 5 FLASHES PER MINUTE
QUINT : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (PEAK): 2.74A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 35.1W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 15' [4572] CORD W/DUAL SWITCH LIGHTER ADAPTER
- MOUNTING: VACUUM/MAGNET MOUNT
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 5.1 LBS (2.3 Kg)

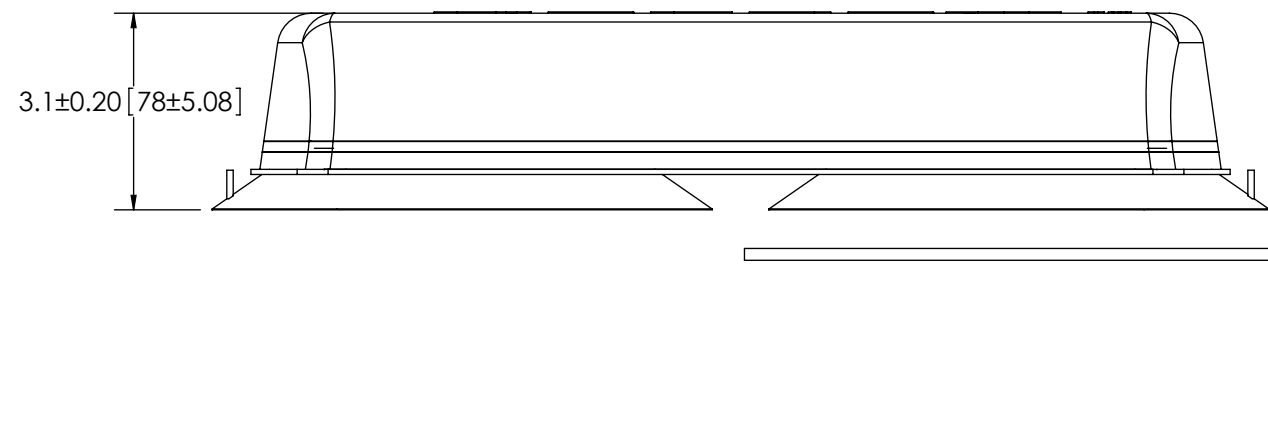

FGS PRODUCT CHART	
FGS. NO.	COLOR
5580A-VM	AMBER/AMBER
5580CA-VM	CLEAR/AMBER

- NOTES:
- ROHS COMPLIANT
 - DIMENSIONS IN INCHES [MILLIMETERS (FOR REFERENCE)]

NON DISCLOSURE AGREEMENT
THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2010 ECCO

SCALE 1:3	APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: C	DRAWN BY	2017-04-26
	CHECKED MDH	2017-04-27
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:	MECH. ENG.	
	ELEC. ENG.	
TEST ENG. JRT	2017-04-26	
SALES. DMV	2017-04-27	
Electronically Controlled Use Latest Copy		

		LED MINIBAR, 8 HEAD, VAC MAG, 12-24VDC	
		CUSTOMER PART NO. SEE CHART	PRODUCT SERIES: 5580
SIZE: B	DWG. NO. 5580XX-VM	REV. C	
Project: 09039		Date Created: 2010-05-12	