


REVISION HISTORY		
REV.	DESCRIPTION	DATE
Α	REVISED SPECIFICATIONS	1994-07-18
В	UPDATED TO CURRENT CAD STANDARDS PER CR# 1911	2005-04-12
С	UPDATED TEMPLATE PER CR# 2785	2008-11-13

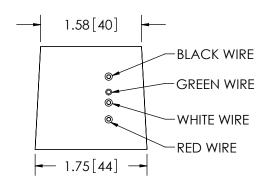


## **SPECIFICATIONS**

1. CERTIFICATIONS: NONE

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. MAX. LOAD: 2.0 A
- 3. VOLTAGE (NOMINAL): 12 to 24 VDC
- 4. VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- 5. CURRENT (NOMINAL): 0.5 A
- 6. POWER (NOMINAL): 4.8 W
- 7. CONNECTION: 4-16 AWG WIRES
- 8. RECOMMENDED MOUNTING: ECCO SUPPLIED MOUNTING HARDWARE
- 9. HOUSING MATERIAL: LOCKTITE RESIN 10207 W/ 161 HARDENER OR EFI POLYMERS 11G203-20203 W/ HARDENER 7H015-50201
- 10. PRODUCT WEIGHT: 2.0 LBS

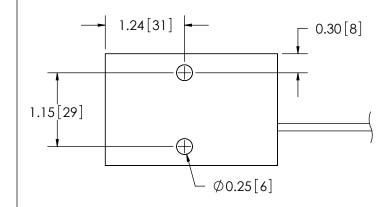

## NOTES: 1. DIMENSIONS IN INCHES[MILLIMETERS(FOR REFERENCE)]

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE HERVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERINGINFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIDE, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OUSED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DEFENDENCE, OR 2015 FOR THE STEAM, SO 2005 ECCO.

SCALE 1:1.5 APPROVALS DATE CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:F JDT DRAWN BY HECKED TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE: MECH. ENG. SENSOR ELECTRONIC REVERSE MOTION INCHES DECIMALS LEC. ENG. X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 PRODUCT SERIES: CUSTOMER PART NO. XX. ± 1.0mm XX.X ± 0.5mm EST ENG. FRACTIONS ± 1/64 DS-1500 THIRD ANGLE PROJECTION SIZE: DWG. NO. DS-1500 REV. SHEET 1 OF 1 Project: Date Created: 1992-08-07