
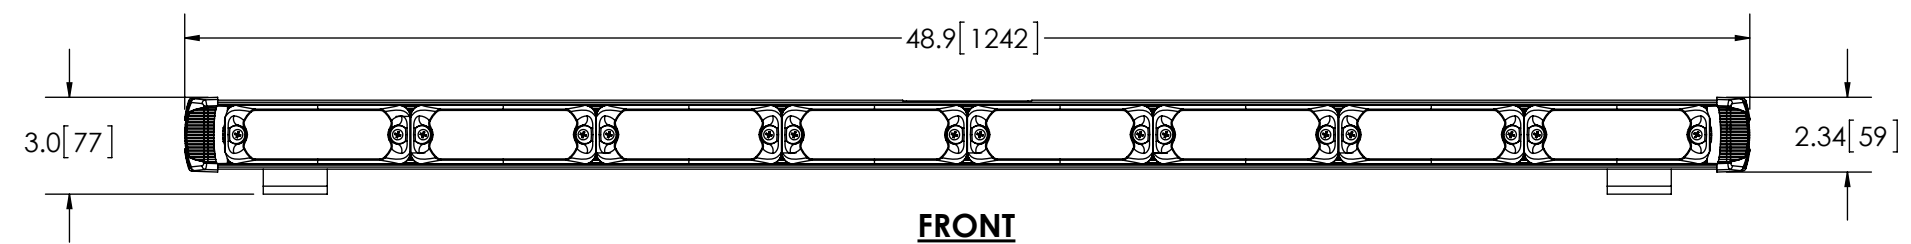
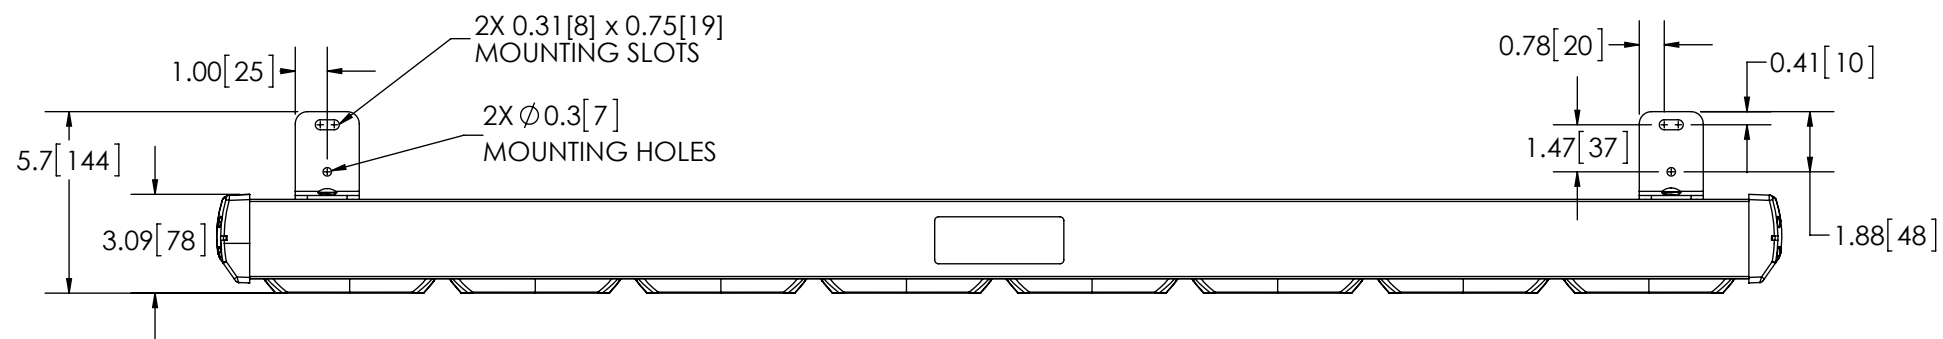


| REVISION HISTORY | | |
|------------------|-----------------------------|------------|
| REV. | DESCRIPTION | DATE |
| 02 | REVISED PER LM13216 | 2014-09-16 |
| 03 | REVISED PER LM13216 | 2014-09-25 |
| A | INITIAL RELEASE PER LM13216 | 2014-10-15 |

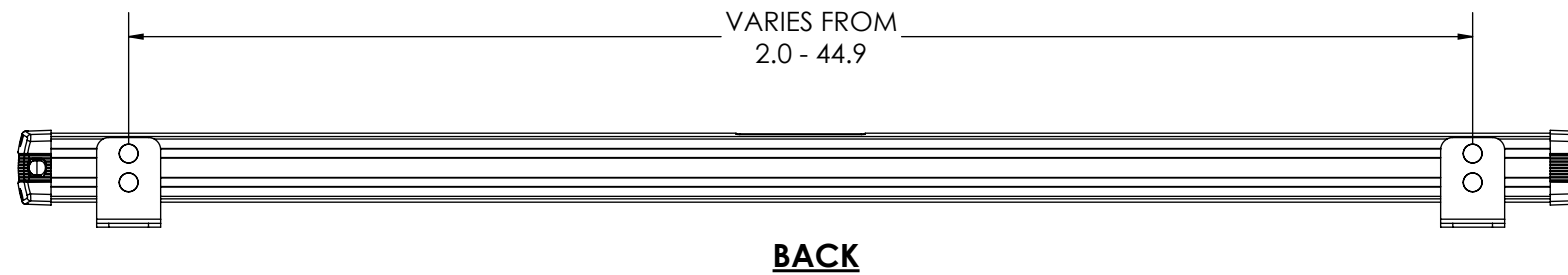

SPECIFICATIONS

- CERTIFICATIONS: **CE**; ECE R10; SAE J595(NOV 2008) CLASS 1; YELLOW (AMBER);
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: WIG WAG : 120 ± 5 FLASHES PER MINUTE
 ALTERNATING : 120 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32 VDC
- CURRENT (PEAK): 1.6A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 20.4W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 2-16 AWG WIRES AND 55' CABLE
- MOUNTING: MOUNTING KIT PROVIDED
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 7.2 LBS (3.24 Kg)

NOTES:
 1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2014 ECCO

| | | |
|---|----------------|------------|
| SCALE 1:6 | APPROVALS | DATE |
| CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE: MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 ANGLES ± 0.5° FRACTIONS ± 1/64 | DRAWN BY SNS | 2014-09-25 |
| | CHECKED MDH | 2014-09-29 |
| | MECH. ENG. JLA | 2014-09-25 |
| | ELEC. ENG. TJT | 2014-10-13 |
| | TEST ENG. JRT | 2014-10-14 |
| | SALES. GLB | 2014-10-03 |
| THIRD ANGLE PROJECTION | | |
| | | |
| Electronically Controlled Use Latest Copy | | |

| | |
|---|--|
| ECCO | |
| SAFETY DIRECTOR, 55', 12-24V, LED, AMBER | |
| CUSTOMER PART NO. ED3355A | PRODUCT SERIES: ED3300 |
| SIZE: B | DWG. NO. ED3355A |
| SHEET 1 OF 2 | Project: LM13216 Date Created: 2014-09-09 |
| | REV. A |

