



DIRECTIONAL LEDS

ED3760 SERIES





ED3760 Series distributes a bright output to increase vehicle visibility and can be installed on running boards, push bumpers, tailgates, or any other perimeter location. 12' light modules offer 32 dual-color flash combinations including steady burn. Includes separate wires for dim and steady burn override. Features include high grade powder coated aluminum housing, sealed lightheads, IP67 rated, 55" cable enclosed in a jacket, and phase 1 and phase 2 syncing capabilities.


Models

MODEL	WIRE EXIT	LENGTH	AMPS	ILLUMINATION COLOR
ED3724BW-L	Left	25.3"	0.3	■ BW
ED3724BWRW-L	Left	25.3"	0.3	BWRW
ED3736BWRW-L	Left	37.3"	0.6	BWRW
ED3760XX-L / -R	Left or Right	61.3"	0.6	AW BW RW
ED3760BWRW-L / -R	Left or Right	61.3"	0.6	BWRW
ED3772XX-L / -R	Left or Right	73.3"	1.1	AW BW RW
ED3772BWRW-L / -R	Left or Right	73.3"	1.1	BWRW

Replace "X" with A = Amber, B = Blue, R = Red, W = White | White is always the secondary color Choose "L" for left side wire exit or "R" for right side wire exit

Design Features

- Each 12" section offers dual-color
- 32 flash patterns including steady-burn color 1, color 2 and traffic advisor
- Universal surface mount capability
- Powder coated aluminum frame
- Polycarbonate durable lens
- Steady burn white override and dim

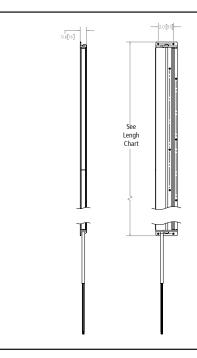

Vehicle Brackets (Not Included):

- EZ3760-C 2019 Silverado 1500, 2500, 3500
- EZ3760-D RAM 1500, 2500, 3500
- EZ3760-F Ford F150, F250, F350