



REVISION HISTORY		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE PER EL0181	2020-12-23
B	REVISED PER EL0181	2021-02-12
C	REVISED PER EL0181	2021-02-16

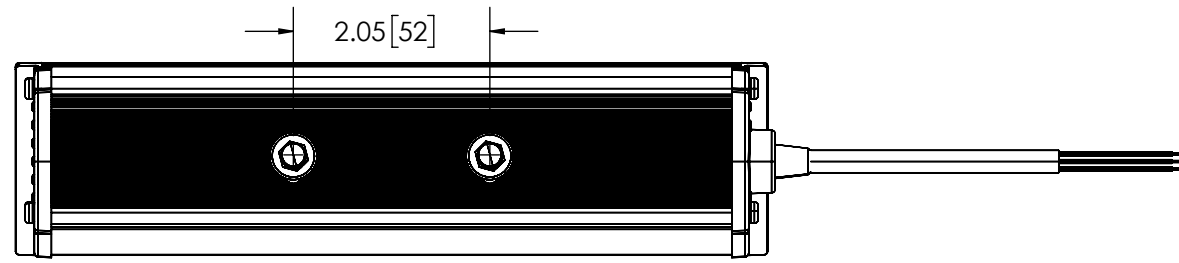

**BACK VIEW**

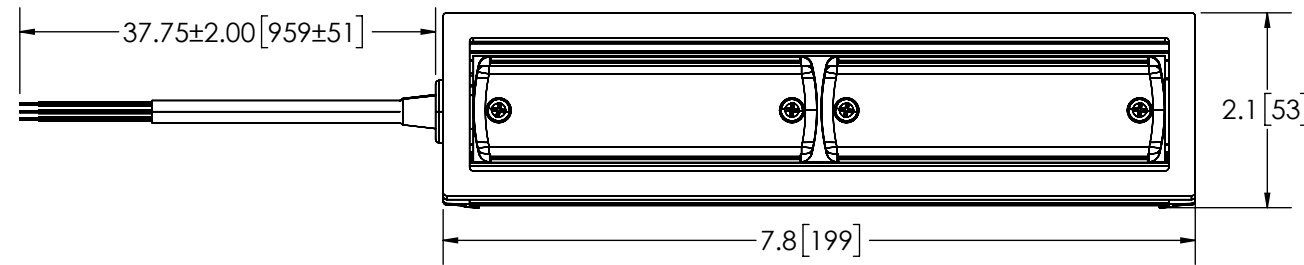

**FRONT VIEW**

## SPECIFICATIONS

- CERTIFICATIONS: ECE R10; AMECA/SAE (SEE CHART) ; CA Title 13 (SEE CHART) ; ; Reg 65 Cert(SEE CHART)  
Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE  
DOUBLE : 75 ± 5 FLASHES PER MINUTE  
QUAD : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 10-30 VDC
- CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 149°F (65°C)
- CONNECTION: 5-20 AWG CABLE
- MOUNTING: ADHESIVE
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.6 LBS (0.27 Kg)

FGS. PRODUCT CHART						
FGS. NO.	COLOR	CURRENT(PEAK) A	POWER (MAX) W	SAE J595	CA T13	ECE R65
ED3974AW	AMB/WHT	0.8	9.6	CLASS 1; AMB,WHT	CLASS B; AMB	CLASS 1; AMB
ED3974BW	BLU/WHT	0.7	9.3	CLASS 1; BLU,WHT	CLASS B; BLU	CLASS 1; BLU
ED3974RW	RED/WHT	0.8	9.6	CLASS 1; RED, WHT	CLASS B; RED	CLASS 1; RED
ED3974RWBW	RED/WHT, BLU/WHT	0.8	9.6	CLASS 1; WHT	-	-

**DISCLAIMER**  
DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ESG ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

**MOUNTING DISCLAIMER**  
MOUNTING MEASUREMENT IS FOR REFERENCE ONLY. MEASURE BEFORE DRILLING.

- NOTES:**
- ROHS COMPLIANT
  - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION  
THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2020 ELECTRONIC CONTROLS COMPANY

SCALE 1:2	APPROVALS	DATE	
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: 01	DRAWN BY ABD	2021-02-16	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:	CHECKED MDH	2021-02-16	
XX. ± 1.0mm XX.X ± 0.5mm	MECH. ENG.		
XX.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	ELEC. ENG.		<b>DIRECTIONAL WINDOW SHROUD, 2 LIGHTHEADS</b>
ANGLES ± 0.5° FRACTIONS ± 1/64	TEST ENG.		
THIRD ANGLE PROJECTION	SALES		CUSTOMER PART NO. <b>SEE CHART</b>
			SIZE: B DWG. NO. ED3974XX
	Electronically Controlled Use Latest Copy	SHEET 1 OF 1	Project: EL0181 Date Created: 2020-08-24
			REV. C