


2-18 AWG WIRES
 RED/WHITE (+) POSITIVE
 WHITE (-) NEGATIVE

SPECIFICATIONS

1. CERTIFICATIONS: **CE**;
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. RAW LUMENS: 62 lumens
3. EFFECTIVE LUMENS: 60 lumens
4. ILLUMINANCE: .0038 lux
5. PEAK BEAM INTENSITY: 3.655 Candela
6. EFFICACY: 75.5 lm/W
7. CORRELATED COLOR TEMPERATURE: K
8. VOLTAGE (NOMINAL): 12 VDC
9. VOLTAGE (EXTREME): 9-16 VDC
10. CURRENT (PEAK): 0.04A (@ 12 VDC NOMINAL)
11. POWER (MAXIMUM): 0.6W (@ 12 VDC NOMINAL)
12. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
13. CONNECTION: 2 LEAD WIRES
14. MOUNTING: ADHESIVE
15. HOUSING MATERIAL: ABS
16. LENS MATERIAL: POLYCARBONATE
17. PRODUCT WEIGHT: 0.9 LBS (0.41 Kg)

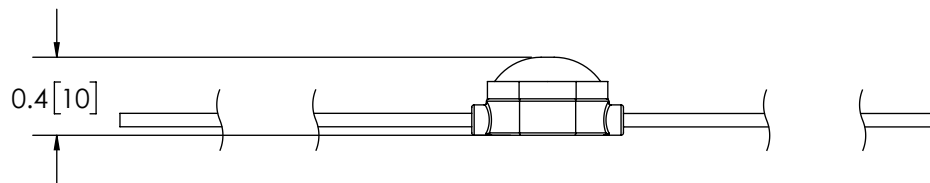

DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

- NOTES:
1. ROHS COMPLIANT
 2. FOR INTERIOR USE ONLY
 3. DIMENSIONS IN INCHES [MILLIMETERS (FOR REFERENCE)]

SCALE 1:1		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: A		DRAWN BY	2017-11-17
		CHECKED ABB	2017-11-20
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		MECH. ENG.	
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	ELEC. ENG.	
	ANGLES ± 0.5° FRACTIONS ± 1/64	TEST ENG.	
THIRD ANGLE PROJECTION		SALES	
		LED MODULE, 1, 12V, W/VHB, 100 PCS, 38 FT	
		CUSTOMER PART NO. EW0131	PRODUCT SERIES:
SIZE: A	DWG. NO. EW0131	REV. B	
Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: EL0064 Date Created: 2017-02-08