



REVISION HISTORY		
REV.	DESCRIPTION	DATE
B	CORRECTED MNT. BOLT CALLOUT PER CR #805	2001-10-15
C	ADDED CERTS & UPDATED DWG. FORMAT PER CR #1113	2004-12-13
D	REPLACED B920 WITH 140-0920-00 PER P3# 06016	2006-06-09

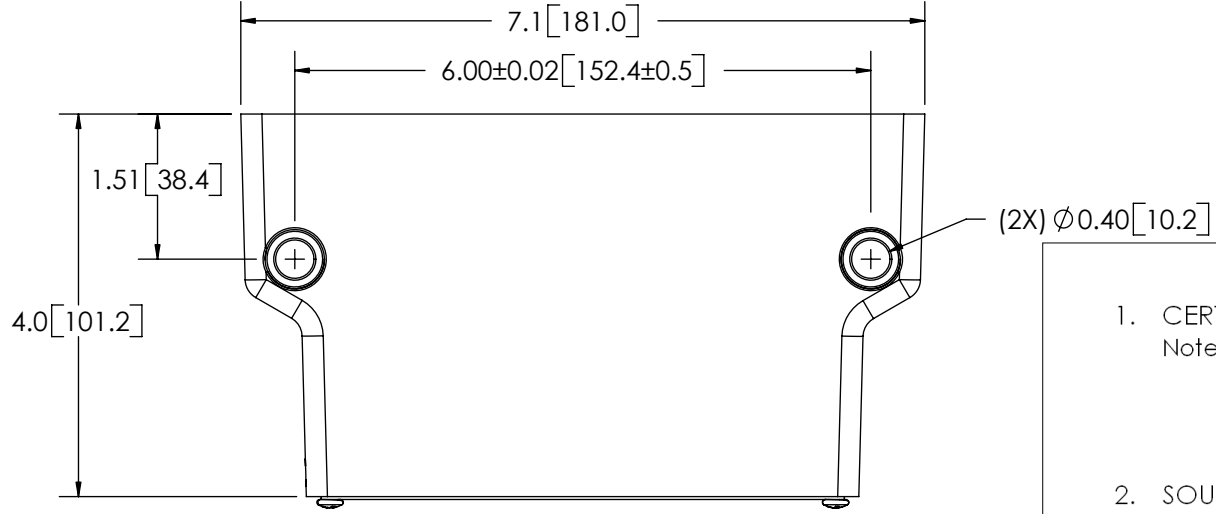

SPECIFICATIONS

- CERTIFICATIONS: **CE**; e;
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- SOUND PRESSURE LEVEL: 97 to 112 ± 4 dB (A) @ 1.2m (4ft)
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (NOMINAL): 0.6 A
- POWER (NOMINAL): 15 W
- TEMPERATURE RANGE: -40°F (-40°C) TO 185°F (85°C)
- FREQUENCY: 960 to 1440 Hz
- CONNECTION: 8 - 32 UNI STUD CONNECTION
- RECOMMENDED MOUNTING: 3/8-16 UNC, GRADE 5 OR BETTER, WITH 3/8" TYPE A SERIES N WASHERS
- HOUSING MATERIAL: GLASS FILLED NYLON
- PRODUCT WEIGHT: 2.9 LBS

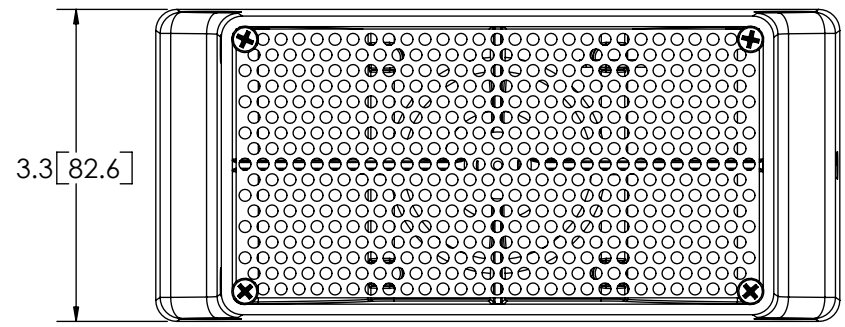

NOTES:
 1. DIMENSIONS IN INCHES [MILLIMETERS (FOR REFERENCE)]

SCALE 1:2	APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:B	DRAWN BY DJG	
	CHECKED	
TOLERANCES ARE IN INCHES, TOLERANCES ARE:	MECH. ENG.	
MILLIMETERS DECIMALS	ELEC. ENG.	
INCHES DECIMALS	TEST ENG.	
ANGLES	SALES	
FRACTIONS		



ALARM, SMART, 97-112 DBA, 12-24 VDC

CUSTOMER PART NO. SA920	PRODUCT SERIES: SA920
SIZE: A	DWG. NO. SA920
SHEET 1 OF 1	REV. D

NON DISCLOSURE AGREEMENT
 THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2004 ECCO

