

Camshaft: Performer-Plus


Part #: #2102

Vehicle Type: CHEVROLET

Engine Application: 265-400 V8 (1957-86)

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 278°	EXHAUST: 288°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.42"	EXHAUST: 0.442"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 14"

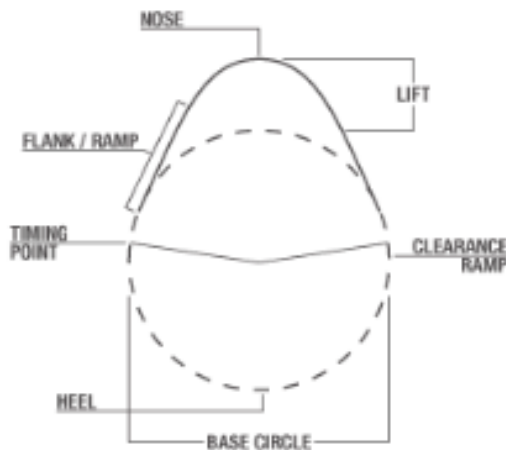

**CAM LOBE REFERENCE**

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT: Opens: 5° ATDC  
Closes: 29° ABDC

EXHAUST TIMING @ .050" LIFT: Opens: 44° BBDC  
Closes: 10° BTDC

**OPTIONAL VALVE SPRINGS:** #5802/#5902

**CAM FEATURES:** For 1957-86 small-block Chevrolet. Produces 320 HP & 382 ft.-lbs. when matched with #2701 intake and #60909 heads.

**INSTALLATION NOTES:** Use Performer-Link Timing Chain and Gear Set, #7800. Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the - or straightup timing mark when installing Performer-Plus camshafts with Performer-Link Timing Sets.

**Footnote 1:** Use only Sure Seat Valve Springs, #5802 or 5902

**Footnote 2:** Use only stock ratio rocker arms.