

Camshaft: Performer-Plus


Part #: #2103

Vehicle Type: CHEVROLET

Engine Application: 400 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 288°	EXHAUST: 288°
DURATION @ .050	INTAKE: 214°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.295"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.442"	EXHAUST: 0.442"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 15"

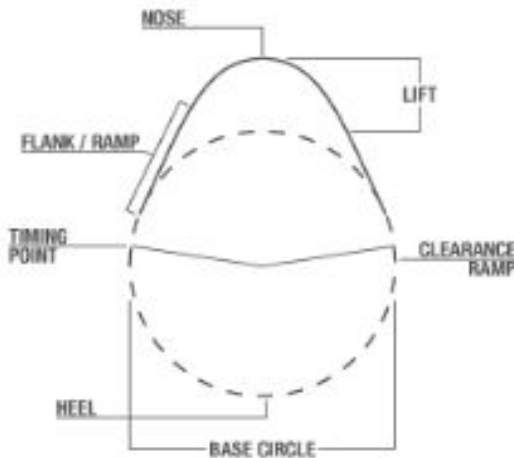

### CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 0° ATDC Closes: 34° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 44° BBDC Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: #5802/#5902

CAM FEATURES: For 1957-86 small-block Chevrolet. Produces 395 ft.-lbs. when matched with #2101 intake and stock heads.

INSTALLATION NOTES: Use Performer-Link Timing Chain and Gear Set, #7800 or #7802. Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the - or straight-up timing mark when installing Performer-Plus camshafts with Performer-Link Timing Sets.

Footnote 1: Use only Sure Seat Valve Springs, #5802 or 5902

Footnote 2: Use only stock ratio rocker arms.