

Camshaft: Performer-Plus


Part #: #2106

Vehicle Type: FORD

Engine Application: 352-428 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 272°	EXHAUST: 282°
DURATION @ .050	INTAKE: 194°	EXHAUST: 204°
LIFT @ CAM (Lobe)	INTAKE: 0.265"	EXHAUST: 0.28"
LIFT @ VALVE	INTAKE: 0.46"	EXHAUST: 0.48"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 105°	IDLE VAC @ 1000 RPM: 16"

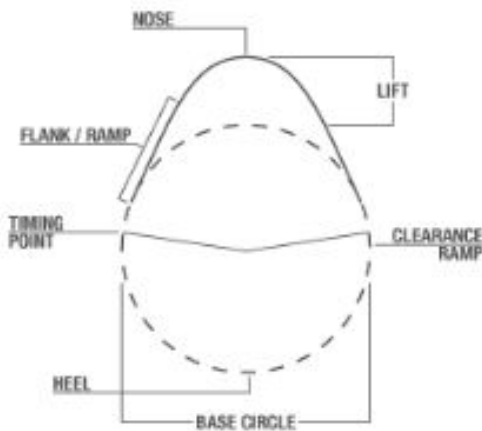

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 8° ATDC Closes: 22° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 37° BBDC Closes: 13° BTDC

OPTIONAL VALVE SPRINGS: #5806/#5906

CAM FEATURES: Produces 410 ft.-lbs. when matched with #2105 intake & stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7808. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Will not work in 427 side-oilers. Isky spacer #350AW required for all FE Fords 1962 and earlier.

Footnote 2: Do not use dual valve springs. Use only recommended stock or Edelbrock Sure Seat Valve Springs #5806 or #5906 (for valve rotators).

Footnote 3: Use stock ratio rocker arms only.