

Camshaft: Performer-Plus


Part #: #2112

Vehicle Type: CHEVROLET

Engine Application: 200-229 90° V6

RPM Range: 1500-5500

DURATION AS ADVERTISED	INTAKE: 270°	EXHAUST: 280°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.42"	EXHAUST: 0.443"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 16"

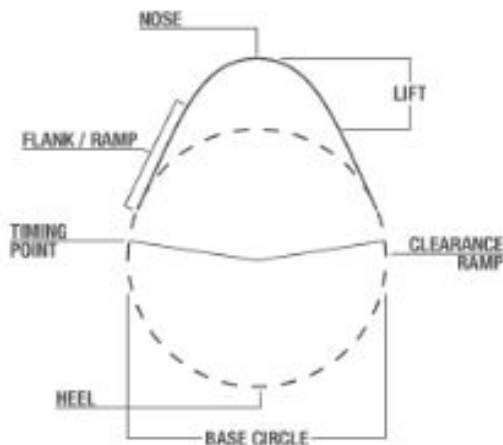

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT: Opens: 5° ATDC
Closes: 29° ABDC

EXHAUST TIMING @ .050" LIFT: Opens: 44° BBDC
Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: #5813/#5913

CAM FEATURES:

INSTALLATION NOTES: Use Performer-Link Timing Chain and Gear Set, #7800. Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the – or straight-up timing marks when installing Performer-Plus camshafts with Performer-Link Timing Sets.

Footnote 1: For non computer-controlled vehicles and non-roller applications.

Footnote 2: Use only stock or Edelbrock Sure Seat Valve Springs, #5813 or 5913 (for rotators).

Footnote 3: Use only stock ratio rocker arms.