

Camshaft: Performer-Plus


Part #: #2122

Vehicle Type: FORD

Engine Application: 289-302 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 270°	EXHAUST: 280°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.448"	EXHAUST: 0.472"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 16"

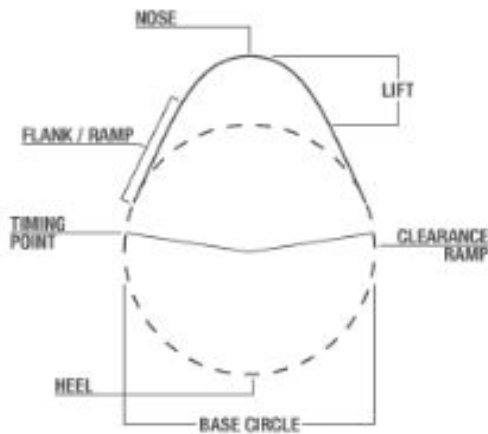

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 5° ATDC Closes: 29° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 44° BBDC Closes: 10° BTDC

OPTIONAL VALVE SPRINGS: #5822/#5922

CAM FEATURES: Produces 310 HP & 260 ft.-lbs. when matched with #2121 intake and #60329 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7820 (1965½/72-1/2) or #7811 (1973½/90). Accu-Drive gear drive #7892 may also be used. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Not for 1985 and later engines with roller lifters.

Footnote 2: Do not use dual valve springs. Use only recommended stock or Edelbrock Sure Seat Valve Springs #5822 or #5922 (for valve rotators).

Footnote 3: Use stock ratio (1.6:1) rocker arms only.