

Camshaft: Performer-Plus


Part #: #2132

Vehicle Type: AMC

Engine Application: 290-401 V8

RPM Range: 1500-5500

DURATION AS ADVERTISED	INTAKE: 278°	EXHAUST: 288°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.448"	EXHAUST: 0.472"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 105°	IDLE VAC @ 1000 RPM: 15"

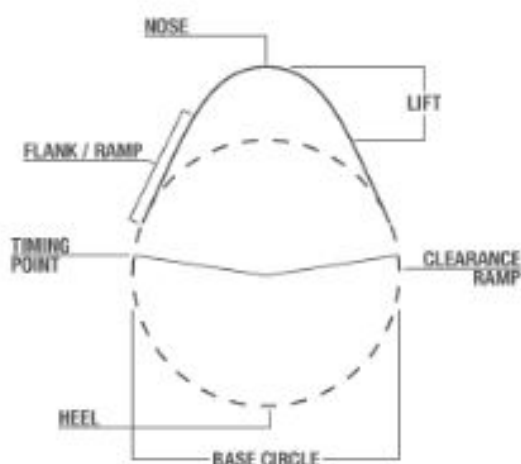

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 3° ATDC Closes: 27° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 42° BBDC Closes: 8° BTDC

OPTIONAL VALVE SPRINGS: #5832/#5932

CAM FEATURES: Produces 275 ft.-lbs. when matched with #2131 intake and stock heads.

INSTALLATION NOTES: Use Performer-Link Timing Set, #7818. Do not use late model timing sets. They are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Performer-Link True Rolling Timing Sets feature three keyways for specific timing selection. Always use the - or straight-up timing mark when installing Performer-Plus camshafts with Performer-Link Timing Sets.

Footnote 1: Use only Sure Seat Valve Springs, #5832 or 5932

Footnote 2: Use only stock ratio rocker arms.