

Camshaft: Performer-Plus


Part #: #2152

Vehicle Type: OLDSMOBILE

Engine Application: 400-425-455 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 288°	EXHAUST: 298°
DURATION @ .050	INTAKE: 214°	EXHAUST: 224°
LIFT @ CAM (Lobe)	INTAKE: 0.295"	EXHAUST: 0.31"
LIFT @ VALVE	INTAKE: 0.472"	EXHAUST: 0.496"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 15"

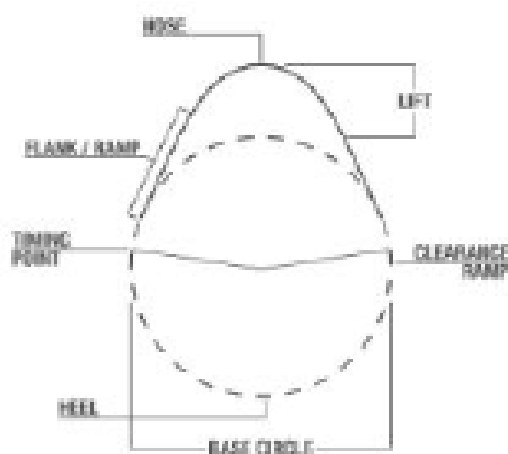

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 0° ATDC Closes: 34° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 49° BBDC Closes: 15° BTDC

OPTIONAL VALVE SPRINGS: -

CAM FEATURES: Produces 445 ft.-lbs. when matched with #2151 intake and stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7813. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use - position for most applications.

Footnote 1: Will not fit toronados or 1966 and earlier.

Footnote 2: Fits 1967-84 400-425-455, 39° bank angle engine.

Footnote 3: Use only recommended stock replacement valve springs or equivalent.