

Camshaft: Performer-Plus

Part #: #2157


Vehicle Type: PONTIAC

Engine Application: 350-455 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 278°	EXHAUST: 288°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.42"	EXHAUST: 0.442"

LOBE SEPERATION: 110° INTAKE CENTERLINE: 105° IDLE VAC @ 1000 RPM: 15"

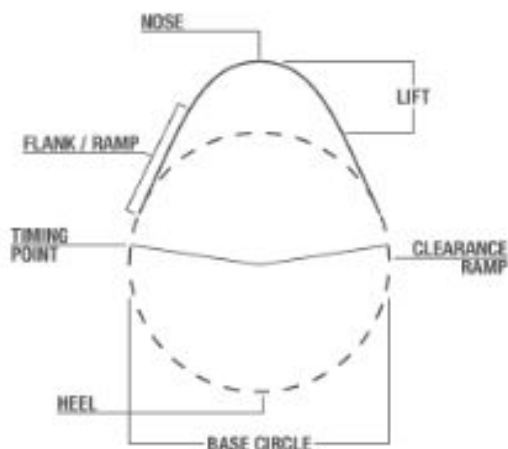

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT: Opens: 3° ATDC
Closes: 27° ABDC

EXHAUST TIMING @ .050" LIFT: Opens: 42° BBDC
Closes: 8° BTDC

OPTIONAL VALVE SPRINGS: #5857

CAM FEATURES: Produces 387 HP & 439 ft.-lbs. when matched with #2156 intake & #60599 heads.

INSTALLATION NOTES: Use Edelbrock Performer-Link Timing Chain and Gear Set #7812. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection. Use "0" position for most applications.

Footnote 1: Do not use high pressure valve springs. Use only recommended Edelbrock Sure Seat Valve Springs #5857 (non-rotators).

Footnote 2: Use stock ratio rocker arms only.