

Camshaft: Performer-Plus


Part #: #2167

Vehicle Type: FORD

Engine Application: 429-460 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 272°	EXHAUST: 282°
DURATION @ .050	INTAKE: 194°	EXHAUST: 204°
LIFT @ CAM (Lobe)	INTAKE: 0.265"	EXHAUST: 0.28"
LIFT @ VALVE	INTAKE: 0.46"	EXHAUST: 0.48"
LOBE SEPERATION: 110°	INTAKE CENTERLINE: 105°	IDLE VAC @ 1000 RPM: 15"

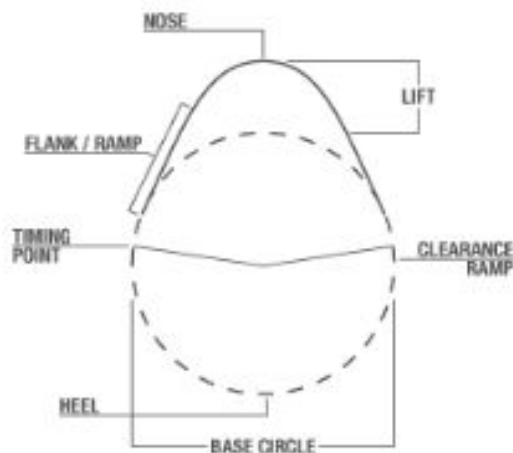

CAM LOBE REFERENCE

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 8° ATDC Closes: 22° ABDC
EXHAUST TIMING @ .050" LIFT:	Opens: 37° BBDC Closes: 13° BTDC

OPTIONAL VALVE SPRINGS: #5867

CAM FEATURES: Produces 455 ft.-lbs. when matched with #2166 intake and stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7830. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

Footnote 1: Do not use dual valve springs. Use only recommended stock or Edelbrock Sure Seat Valve Springs #5867

Footnote 2: Use stock ratio rocker arms only.