

Camshaft: Performer-Plus


Part #: #2172

Vehicle Type: FORD

Engine Application: 351M-400 V8

RPM Range: Idle-5500

DURATION AS ADVERTISED	INTAKE: 282°	EXHAUST: 292°
DURATION @ .050	INTAKE: 204°	EXHAUST: 214°
LIFT @ CAM (Lobe)	INTAKE: 0.28"	EXHAUST: 0.295"
LIFT @ VALVE	INTAKE: 0.484"	EXHAUST: 0.51"
LOBE SEPERATION: 112°	INTAKE CENTERLINE: 107°	IDLE VAC @ 1000 RPM: 14"

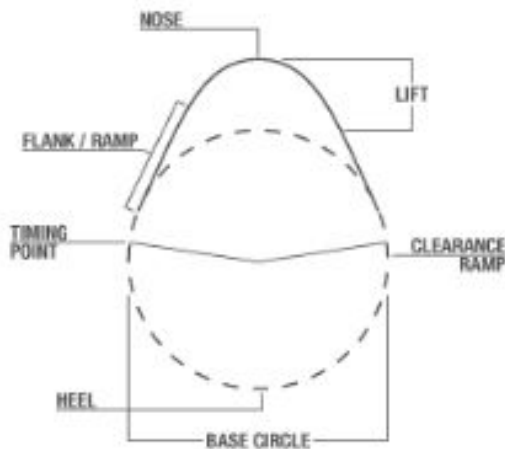

**CAM LOBE REFERENCE**

The information below is for verification of opening and closing events.

INTAKE TIMING @ .050" LIFT:	Opens: 5° ATDC Closes: 29° ABDC
-----------------------------	------------------------------------

EXHAUST TIMING @ .050" LIFT:	Opens: 44° BBDC Closes: 10° BTDC
------------------------------	-------------------------------------

OPTIONAL VALVE SPRINGS: #5872/#5972

CAM FEATURES: Produces 390 ft.-lbs. when matched with #2171 intake & stock heads.

INSTALLATION NOTES: Use Edelbrock Performer-Plus Timing Chain and Gear Set #7821. Do not use late model timing chain and gear sets that are designed for emission-controlled engines. These timing sets are machined in a retarded position and are not recommended for this camshaft installation. Edelbrock Timing Sets feature three keyways for specified timing selection.

**Footnote 1:** Do not use dual valve springs. Use only recommended stock or Edelbrock Sure Seat Valve Springs #5872 or #5972 (for valve rotators)

**Footnote 2:** Use stock ratio (1.73:1) rocker arms only.